




REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

VSWR:1.5 Max.
 Per Mil-STD /94
 RoHS Compliant
 50 OHM Impedance
 Operation temperature:-40 to 65 C

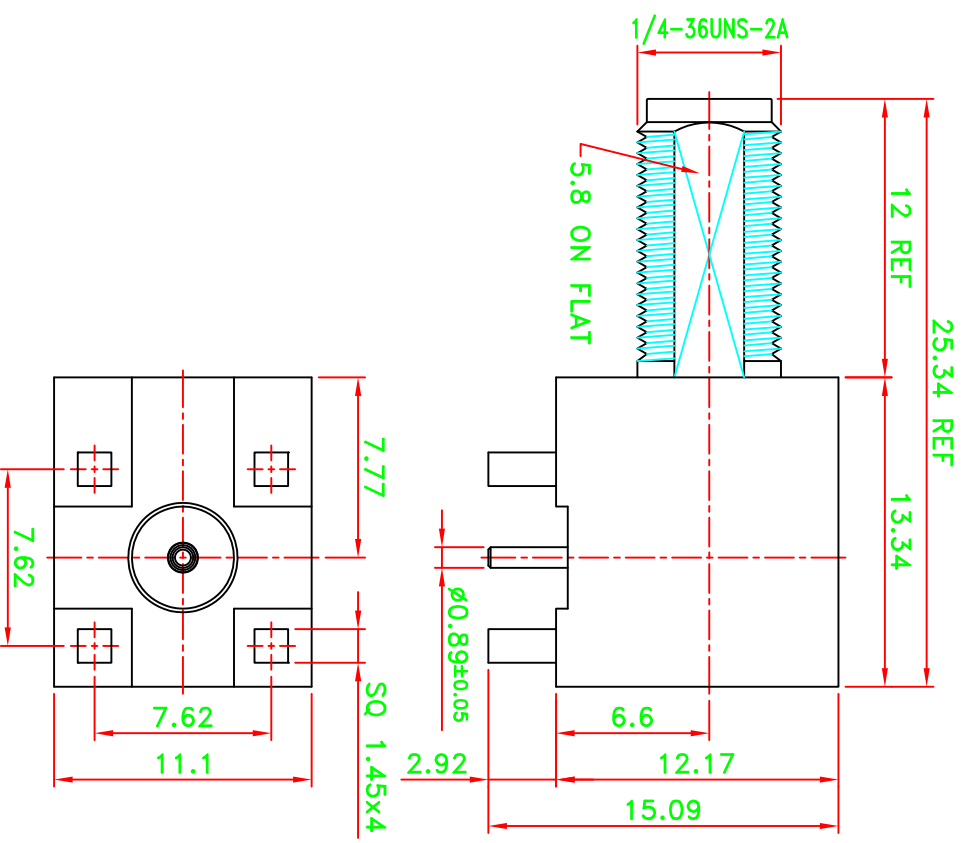

RECOMMENDED
MOUNTING HOLE

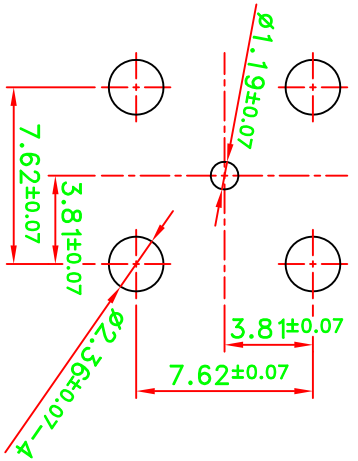

NO	DESCRIPTION/DRAWING NO.	Q'TY	MATERIAL	FINISH
5	INSULATOR	1	PTFE	NATURAL
4	INSULATOR	1	PTFE	NATURAL
3	PIN	1	PHOS. BRONZE	GOLD
2	BODY	1	BRASS	NICKEL
1	BODY	1	BRASS	NICKEL

PART NO.	1261A514FSMA
APPROVED	DATE 10/30/14
CHECKED	DATE 10/30/14
DRAWN	DATE 10/30/14

* MAJOR DIMENSION	UNLESS OTHERWISE NOTED TOLERANCES
0.5-6	±0.2
6-30	±0.4
30-120	±0.6
120-315	±1.0
ANGLES	±5°

TITLE	Bommar Interconnect Products, Inc
SMA R/A P.C. BOARD MOUNT JACK	
DRAWING NO.	ASSMA-10479-TGN
REV	B
FILE NO.	W:\77\AS\ASSMA\ASSMA-10479-TGN Winchester-->20141030

SCALE 3/1 UNIT mm