

# EML5 LED Micro Emergency Light

The EML5 LED micro emergency light offers a mini sized unit for those tight spaces or more discreet applications. The EML5 Series is available in white and offers universal mounting, a test button with AC indicator, damp location listing, and a remote capable option. With fully adjustable heads, the EML5 Series complements any design application.

## Construction

- Injection molded thermoplastic ABS housing.
- UL-94 V-0 Flame rating - Flame Retardant
- Adjustable heads for aiming light where required
- Head tilt: +25°/-90°
- Head rotation: 330°
- Operating temperature: 32°F - 104°F (0°C - 40°C)

## Optical System

- Precision engineered Prismatic Lens

## Electrical

- Input power 2.4W at 120/277
- Remote output power 2.4W at 3.6VDC
- Supports up to two (2) single or one (1) double 3.6VDC NICOR remote lamps (see compatibility chart on Spec Sheet)
- Minimum 90 minute capacity on emergency mode (including remote heads)

## Mounting and Installation

- Easy installation into a standard junction box or conduit
- Universal mounting plate with EZ quick connect
- Damp location rated

## Listings



- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions

## Finish

- White unpainted ABS Plastic



Compatible with remote heads: ERH1|2 & ERHWP 1|2

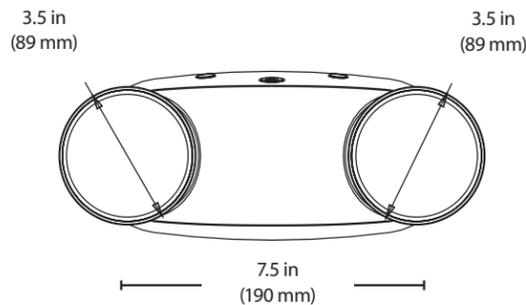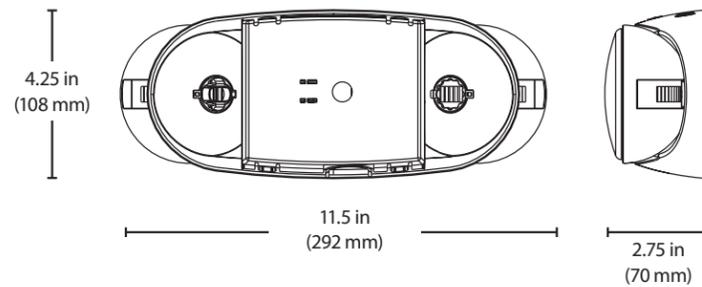

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	1.15
Delivered Lumens (Lm)	180
System Efficacy (Lm/W)	158.1
Correlated Color Temp (K)	6000K
Color Rendering Index (CRI)	74
Emergency Operation	Minimum 90 Minutes



+25°/-90° TILT WITH 330° ROTATION

# Applications



The EML series can be installed in many applications such as laboratories, schools, hospitals, event venues and more.

# Installation



Easy installation with mounting plate for access to wiring can be installed into a standard junction box.



Adjustable head lamps with +25°/-90° tilt and 330° rotation to aim the light where it is most needed.

Ordering Information				
Series	Version	Voltage	Housing Color	Remote head Option
EML5	10 (1.0)	UNV (120/277VAC)	WH (white)	BLANK (non-remote)
				R (remote head capable)