

USER'S MANUAL

MC400

3" (76mm) WEATHER RATED SPEAKER AND AMPLIFIER SYSTEM

BOSS[®]
AUDIO SYSTEMS

BOSS Audio Systems

3451 Lunar Court • Oxnard, CA 93030

www.bosssaudio.com

800-999-1236 US Toll-free

805-988-0192 US Local Main

tech support: www.bosssaudio.com/support/technical-support



1016

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries.
BOSS Audio Systems is not affiliated with Apple, Inc.

USER'S MANUAL

MC400

3" (76mm) WEATHER RATED SPEAKER
AND AMPLIFIER SYSTEM



BOSS[®]
AUDIO SYSTEMS

REBEL
POWER SPORTS

MC400 Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	-----10~16 V
Max Power	----- 600 W
THD	----- <0.1%
S/N	----- >85 dB
Channel Separation	----- >50 dB
Frequency Response	----- 80 Hz - 15 KHz
Sensitivity	----- 150 mv -1v
Speaker Wires	----- 4.9'
Volume Control Wire	----- 5.9'
Audio Input Cable	----- 5.9'
Power Cable	----- 8.2'
Bracket Size Range	----- 0.75" ~1.25"
Fuse Rating	----- 5A

MC400 Motorcycle/UTV Amplified Speaker System

Contents


Amplifier	----- 1 PC
High-Performance, Weatherproof Speakers	----- 2 PCS
Amplifier Mounting Screws	----- 4 PCS
Mounting Hardware	----- 2 PCS
Rubber Mounting Shims	----- 4 PCS
Amplifier Mounting Hardware	----- 8 PCS
Fuse	----- 1 PC
User's manual	----- 1 PC

Features:

- RCA & 3.5mm Audio Inputs
- Speaker Clamp Mounts
- Weatherproof Volume Control
- High-Impact, High Temp Speaker Enclosures
- Weatherproof Speakers

MC400 Motorcycle/UTV Amplified Speaker System

Connections

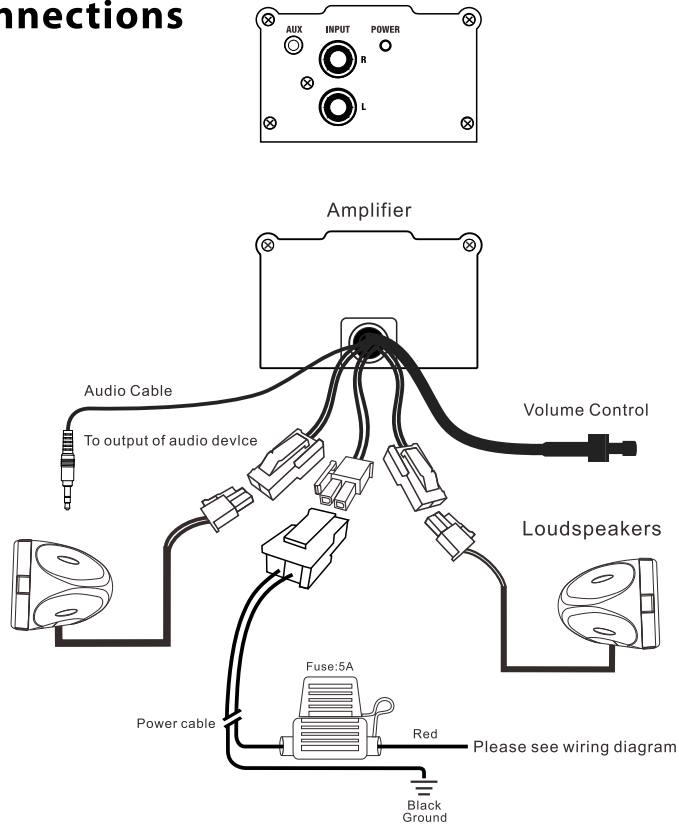


Amplifier and Loudspeaker Mounting

Install Reminder

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust

Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)



MC400 Motorcycle/UTV Amplified Speaker System

Installation

1. Screw the brackets to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring

1. Be sure to run the wiring securely and far away from any moving components.
2. Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 5A) switched power source.
3. Use the 3.5mm stereo jack to connect to your entertainment source(MP3 player, etc).
4. Use your player device and wired remote volume controller to control your level of loudness.