

Duo Hand Shower Wand

MODELS:

- VS-4600: 2.5 GPM (9.5 L/min) flow rate
- VS-4600-E2: 2.0 GPM (7.6 L/min) flow rate
- VS-4600-E175: 1.75 GPM (6.6 L/min) flow rate
- VS-4600-E15: 1.5 GPM (5.7 L/min) flow rate

FEATURES:

- 5 plungers, 149 sprays, 4 spray patterns and pause mode
- 4 setting spray face includes rain, kalas, plunger and massage sprays
- Spray adjusting faceplate, with optimum spray setting when in vertical position
- Plastic body construction
- 1/2" -14 NPS male inlet
- Includes coordinating shower bracket with 1/2"-14 NPT brass ball nut, female inlet, 1/2" - 14 NPS male outlet with check valve
- Includes 5' metal hose with (1) 1/2" -14 NPS female inlet and (1) 1/2"-14 NPS female outlet
- Corrosion resistant finishes
- Coordinates with Duo Collection

STOCK FINISHES:



PC BN BBZ MB



STANDARDS:

- ASME A112.18.1/CSA B125.1
- WaterSense: 2.0, 1.75 and 1.5 GPM only
- CEC (CA Energy Commission): 1.75 and 1.5 GPM only
- ADA

WARRANTY:

Visit www.speakman.com for full product warranty information

- 1 Year Limited Warranty (commercial)
- Limited Lifetime Warranty (residential)

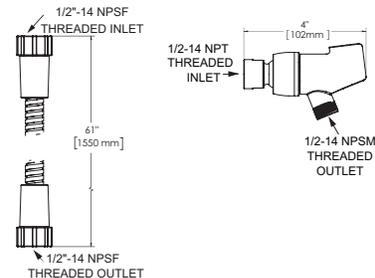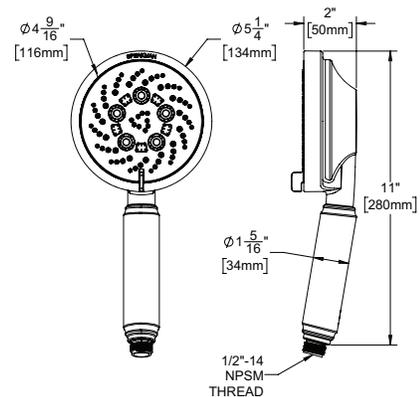

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 01-FEBRUARY 2025