


## Suitable coupling plates

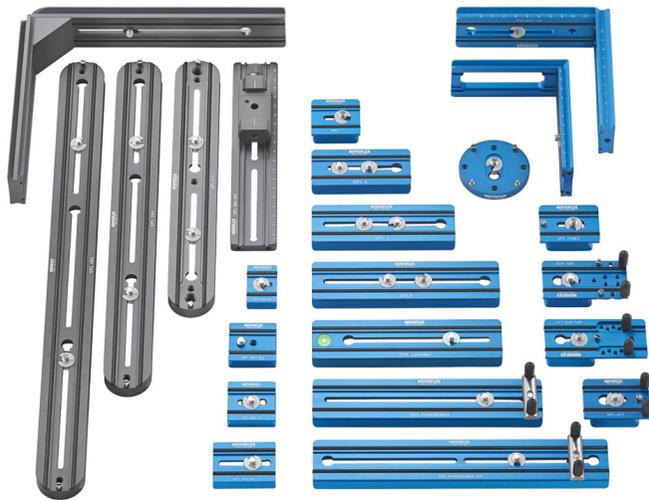

NOVOFLEX offers a wide range of suitable coupling plates for Q=BASE II. Different dimensions as well as different threads are available. Q=PLATES are offered in different lengths, with one or more anti-twist screws and special plates for video cameras and medium format cameras. These Q=PLATES use the special safety pin of the Q=BASE II to prevent the plates from slipping out of the base.

For a complete overview about all available Q=PLATES please contact your photo dealer or visit our website.

USER MANUAL



## Information

For more information, advice and tips concerning our products contact your photo dealer, the distributor of NOVOFLEX products in your country (have a look at „Where to buy“ section at our website to find your distributor) or visit our website: [www.novoflex.com](http://www.novoflex.com)

For personal advice about possible accessories which is suitable for your NOVOFLEX product please contact the following phone number or send us an e-mail.



NOVOFLEX Präzisionstechnik  
GmbH  
Brahmsstr. 7  
87700 Memmingen  
Germany  
Phone +49 8331 88888  
Fax +49 8331 47174  
Email [mail@novoflex.com](mailto:mail@novoflex.com)  
Internet [www.novoflex.com](http://www.novoflex.com)



Nomenclature	
1	Spirit Level
2	Release Lever 1
3	Anti twist screw
4	1/4"-20 screw
5	Safety Pin
6	Locking-/Release Ring/Lever 2

## Mounting on a tripod

The NOVOFLEX Q=BASE II has two mounting points at the bottom. One 1/4" thread and a 3/8" thread. There is a 1/4" adapter screwed in the 3/8" thread which can be removed if not required. Mount the Q=BASE II with the matching thread to the tripod or ball head. The central 1/4" screw can be used on ball heads with female thread in the ball neck. It can be removed if necessary.

In order to prevent the quick release unit from inadvertent twisting, the Q=BASE II is equipped with an anti twist screw (3). To activate, screw the Q=BASE II onto the tripod and tighten the anti twist screw with a suitable allen wrench.

## Mount the camera

1. Fasten the desired mounting plate to your camera.
2. Place the mounting plate to the fixed front part of your Q=BASE II and press the camera downwards. An audible latching signalises the correct locking.

The safety pin prevents the Q=PLATE mounting plates from slipping out after the mounting plate is latched. This allows proper adjustment of the mounting plate and the mounted equipment without risking the equipment to slip out uncontrollably.

### Note

The safety pin works only with genuine NOVOFLEX Q=PLATES.



3. After adjusting the equipment, turn the locking ring (6) clockwise to tighten the mounting plate. The direction of rotation is labeled with LOCK on the locking ring.



## Dismount the camera

1. Turn the locking ring anti clockwise to untighten the mounting plate.



2. To unlock the Q = BASE II, open the clamping ring (6) by turning it to the OPEN position, tighten the ring and simultaneously press the opposite unlocking button (2).



### Note

The Q = BASE II can only be unlocked with the release buttons (2, 6) when the clamping ring (6) is in the open position.