


GSD

2025-58-9

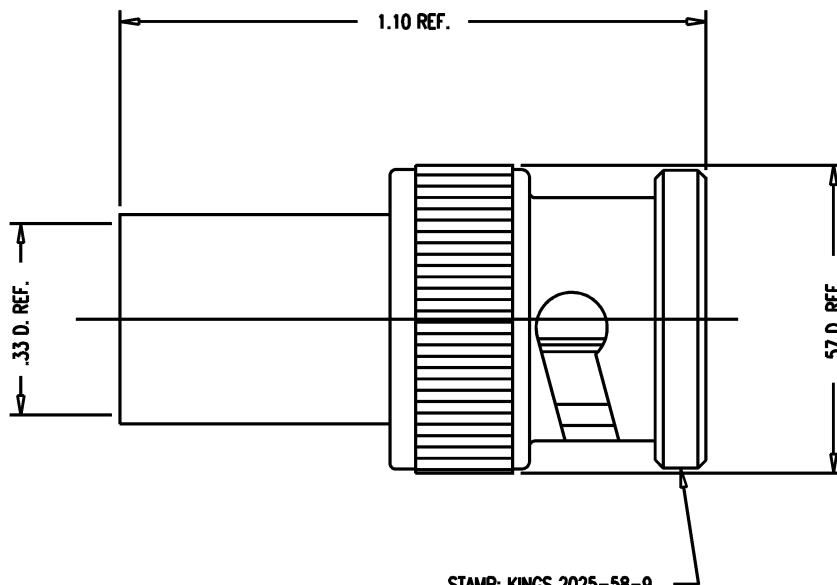

NOTES:

1. FOR USE WITH WE 724 AND BELDEN 8281.
2. FOR CABLING INSTRUCTIONS SEE CP-424.
3. FOR CABLE TRIMMING USE KTJ-43 & KTD-30.
4. FOR CRIMPING USE DIE KTH-2010.
5. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
6. MATERIALS:
 - INSULATOR-TEFLON, ASTM-D-1457
 - GASKET-SILICONE RUBBER, ZZ-R-765
 - K-GRIP SLEEVE-COMMERCIAL BRONZE, ALLOY 220
 - OUTER CONTACT } BER. COP., ASTM-B-196
 - SPRING WASHER }
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
7. FINISHES:
 - SPRING WASHER-SILVER PLATE PER QQ-S-365
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
8. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE-75 OHMS
 - WORKING VOLTAGE-500 VRMS
 - FREQUENCY RANGE-DC TO 2 GHZ

STAMP: KINGS 2025-58-9

REVISIONS

ISSUE	CHANGES	
	DATE	BY
0	ER 32849 JCA 02/14/91	
1	CN 34749 D JCA 07/16/93	
2	CN 37010 C JJS 06/18/96	

JCA1353

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, 75 BNC

DRAWN JCA D02/14/91

DESIGN GA D02/20/91

APPR. DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

2025-58-9

GSD