



NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR USE WITH RG-178, 196, OR EQUIVALENT.
2. MATERIAL SPECIFICATIONS:
INSULATORS: PTFE
BODY: BERYLLIUM COPPER
FERRULE: COPPER
ALL OTHER METAL PARTS: BRASS
3. FINISH SPECIFICATIONS:
CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL
ALL OTHER METAL: THIN GOLD OVER .000050 MIN THICK COPPER
4. ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC TO 3.0 GHz
5. CONTACT AND FERRULE SHIPPED LOOSE
6. CRIMP FERRULE (.128[3.25] HEX) AND CONTACT (.028[0.7] SQ).

REV	DESCRIPTION	BY	DATE	APPD
A	ER050183	J	07/18/15	DCAM

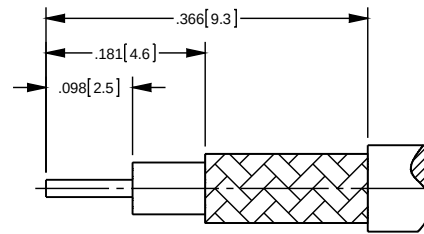

RECOMMENDED CABLE STRIPPING DIM'S

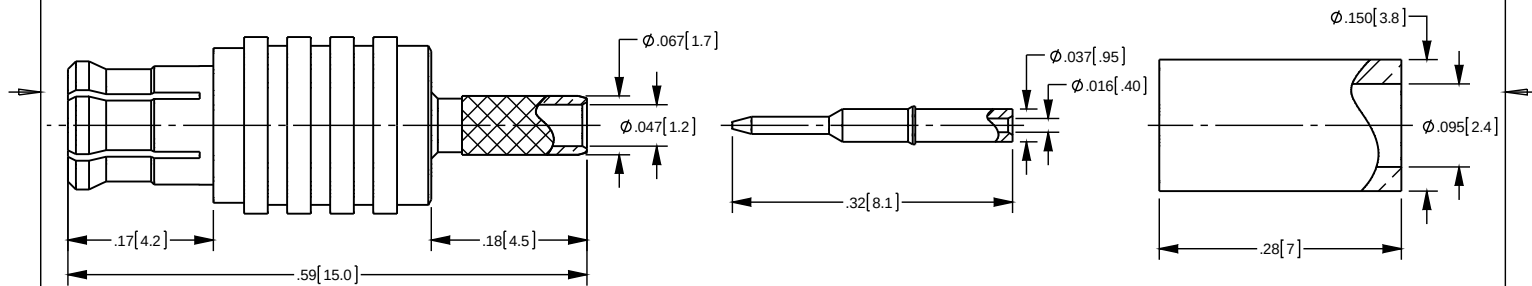

CATALOG P/N: 1210A201M

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [XX] ± .01 [0.3] XXX [XXX] ± .005 [0.13] XXXX [XXXX] ± .000X ANGLES: ± 2° SCALE: 6:1				 by WINCHESTER Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middlebury, Connecticut 06762			
CUSTOMER SALES DRAWING							
DRAWN J	DATE 07/15/2015	APPROVED J	DATE 10/05/2015	MCX CRIMP PLUG (FOR RG-178, 196) (RoHS)			
APPROVED DCAM	DATE 07/15/2015	APPROVED XXX	DATE XX/XX/XX	A	SD1210A201M	SHT 1	OF 1
						REV A	