





NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev.Date	Modified By	Brief Description
V2.0	16 Mar 22	Mona	Added total connection length

laser engraving logo
Location in the middle
Color:white

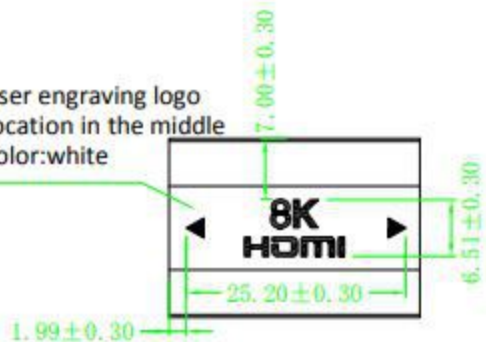

CN1	CN2
01	01
02	02
03	03
04	04
05	05
06	06
07	07
08	08
09	09
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
SHELL	SHELL

Note:

1. 100% short/open circuit & miswire test conditions.
2. On-resistance ≤ 5Ω.

Withstand voltage test: AC 300V/10mS. Leakage current 0.5mA.

Insulation resistance ≥ 10MΩ. High voltage test: DC 300V/10mS.

3. Mark **xx** as the key control size.

4. Up to 8K60HZ, 7680*4320 resolution.

5. To avoid distortion, please keep a total connection length of

less than 5 meters.