



## ▼ Package Content



Camera



Quick Start



Screws & wall plugs




Waterproof plug kit




Hex wrench

Step1: Find the hex wrench supplied in the sales package to open the dome cover.

Step2: Place the camera to the location you want and fasten it to the ceiling or wall.

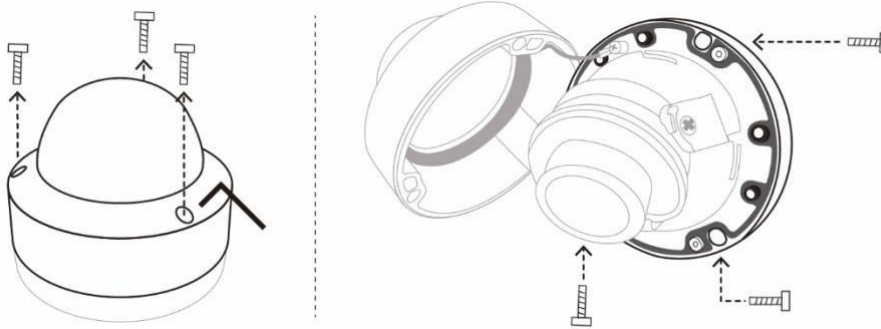


Step3: Adjust the viewing angle of the camera as shown below.

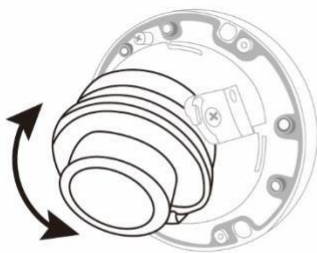

Vertical



Horizontal

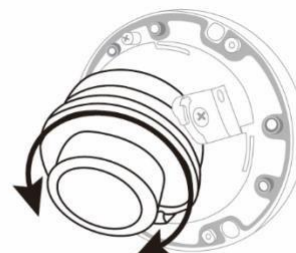

Rotation

Step4: Replace the dome cover back. Make sure the rubber ring is well attached and fastened to ensure the water-proof function works normally.

### Installing waterproof plug kit

*Note: It's highly recommended to use the waterproof plug kit to protect the RJ45 connector from rusting.*

