
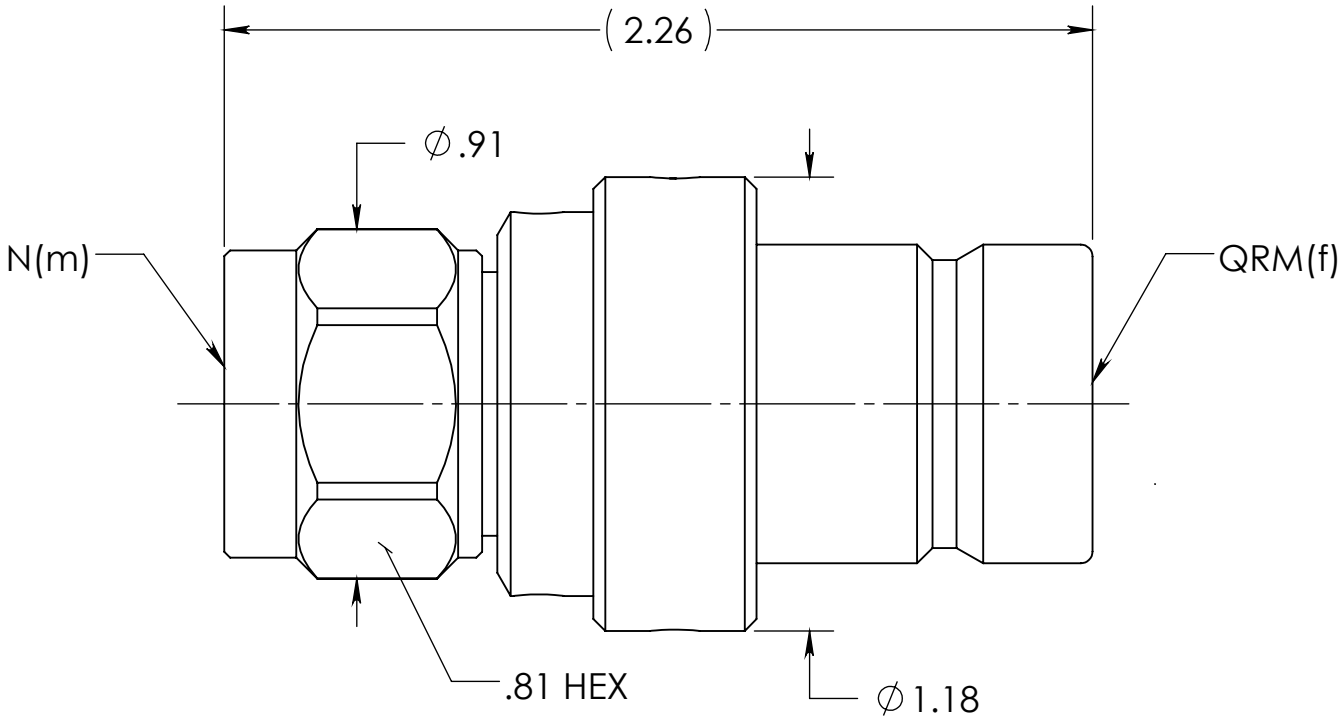


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	06/15/11	AM

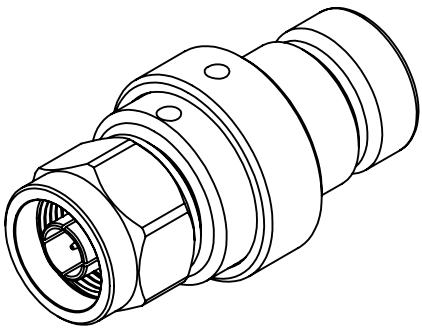

ENGINEERING DATA:



ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL

MECHANICAL:
INTERFACE: N(m) PER MIL-STD-348 FIG. 304.1
QRM(f) PER TRU SPECIFICATION

MATERIAL:
INSULATORS: PTFE (Teflon)
CONTACTS: BRASS & BERYLLIUM COPPER
BODY & NUT: BRASS

FINISH:
CONTACTS: GOLD PLATED
BODY & NUT: NICKEL PLATED

NOTES:
1. UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE REFERENCE ONLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN MVC	DATE 06/15/11	<div>TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™</div>		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: <div>63/√</div>	ENG APPR. AM	DATE 06/15/11			
		MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL, RF N(m) to QRM(f) ADAPTER		
		OTHER APPR.	DATE			
COMMENTS:	THIRD ANGLE PROJECTION 	SIZE B	DWG. NO. TRU-11726	REV -		
surface area: sq inch		CAGE CODE: 92180	SCALE: 4:1	SHEET 1 OF 1		
weight: lbs						