




BINOCULARS

Assembly Instructions

1. Choose a location to install the binoculars. The binoculars should never be mounted more than 3' above the surfacing or the platform. It must always face into play system. The binoculars are not meant to be climbed on or used as a support, for hands or feet, in the climbing process.
2. Mark and drill a 3/16" hole approximately 1" deep. Attach the binocular base (2) to playset using lag bolt (3) and flatwasher (4).
3. Attach binoculars (1) to binocular base (2) using hex bolt (5), two flatwashers (6) and locknut (7). Tighten locknut tight but not too tight. Binoculars should pivot freely.

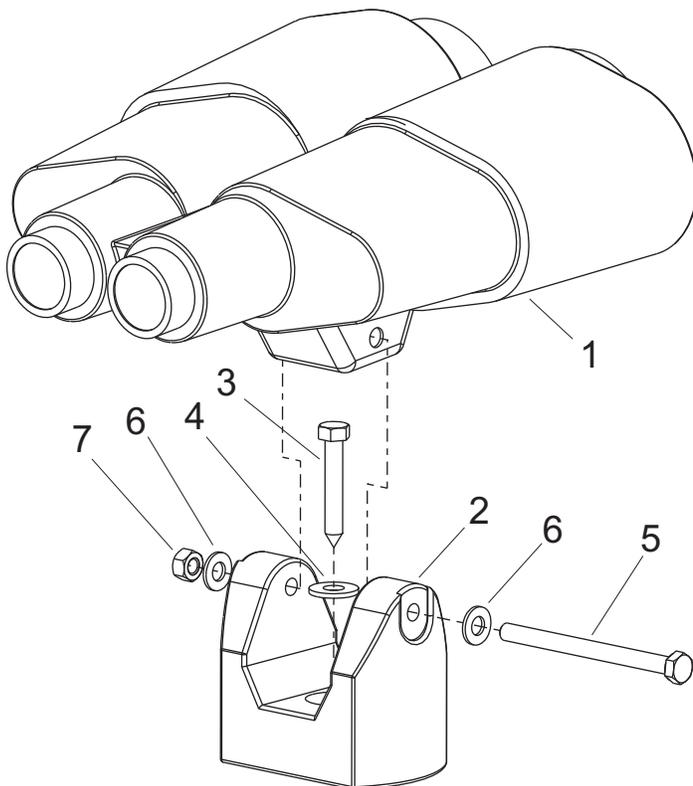

Item	Description	Qty
1	Binocular	1
2	Binocular Base	1
3	5/16" X 1 1/2" LAG BOLT	1
4	5/16" ID X 7/8" OD WASHER	1
5	5/16" X 4" MACHINE BOLT	1
6	5/16" ID X 11/16" OD WASHERS	2
7	5/16" LOCK NUT	1