

LEVER ACTION DISPENSER

Item Number: W54232

OWNER'S MANUAL

1 YEAR WARRANTY

PERFORMANCE TOOL® extends only the following warranties, and only to original retail purchasers. These warranties give specific legal rights. Except where prohibited by local law, the law of the State of Washington governs all warranties and all exclusions and limitations of warranties and remedies. There may be other rights which vary from state to state.

PERFORMANCE TOOL® warrants the product to be free from defects in materials and workmanship under normal use and service. A defective product may be returned for a free replacement within 90 days from the date of purchase, provided that product is returned to place of purchase immediately after discovery of defect. After 90 days and up to one year from date of purchase, PERFORMANCE TOOL® will replace at no charge any parts which our examination shall disclose to be defective and under warranty. These warranties shall be valid only when a sales receipt showing the date of purchase accompanies the defective product or defective part (s) being returned. For part (s) after 90 days, please remit your request, postage prepaid to:

PERFORMANCE TOOL, P.O. Box 88259 Tukwila, WA 98138

These warranties exclude blades, bits, punches, dies, bulbs, fuses, hoses, and other consumables which must be replaced under normal use and service. These warranties shall not apply to any product or part which is used for a purpose for which it is not designed, or which has been repaired or altered in any way so as to affect adversely its performance or reliability, nor shall these warranties apply to any product or part which has been subject to misuse, neglect, accident or wear and tear incident to normal use and service.

PERFORMANCE TOOL® does not authorize any other person to make any warranty or to assume any liability in connection with its products.

Except for warranties of title and the limited express warranties set forth above, PERFORMANCE TOOL® makes no express or implied warranties of any kind with respect to its products. In particular, PERFORMANCE TOOL® makes no implied warranty of merchantability and no implied warranty of fitness for any particular purpose, except that for goods purchased primarily for personal, family or household use and not for commercial or business use, PERFORMANCE TOOL® makes an implied warranty of merchantability (and, if otherwise applicable, an implied warranty of fitness for a particular purpose), but only for the particular qualities or characteristics, and for the duration, expressly warranted above.

The laws on limitation of implied warranties may differ from state to state, so the above limitations may not apply in all cases.

PERFORMANCE TOOL® shall not be liable for consequential, incidental or special damages resulting from or in any manner related to any product, or to the design, use, or any inability to use the product. The sole and exclusive remedy for a defective product or part shall be the repair, or replacement thereof as provided above. The laws on limitation of remedies or on consequential, incidental or special damages may vary from state to state, so the above limitations may not apply in all cases.

© Copyright 2019 WILMAR CORPORATION, P.O. Box 88259 Tukwila, WA 98138



WARNING!

READ, UNDERSTAND AND FOLLOW ALL INSTRUCTIONS AND WARNINGS BEFORE OPERATING THIS TOOL. FAILURE TO DO SO MAY RESULT IN PERSONAL INJURY AND/OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

PT
Performance Tool

Performance Tool®

FEATURES & BENEFITS

- Manual operation for quick, clean transferring of lubricating oils, gasoline, diesel fuel & kerosene
- Dispenses 2 ounces per stroke
- Designed for use with 25 to 50 pound / 5 gallon containers
- 48 in. PVC hose pipe with bent nozzle
- Rubber grip lever action pump handle

SPECIFICATIONS

Delivery	.2 oz of fluid per stroke
Maximum liquid temperature	160°
Basic construction	Steel
Vanes	Carbon
Rod, Spring	Steel
Seals	Rubber
Fasteners (non-wetted)	Plated steel

IMPORTANT SAFETY INFORMATION

⚠ WARNING: READ, UNDERSTAND AND FOLLOW ALL INSTRUCTIONS AND WARNINGS BEFORE OPERATING THIS TOOL. FAILURE TO DO SO MAY RESULT IN DEATH, PERSONAL INJURY AND/OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

⚠ WARNING: THE USER IS RESPONSIBLE FOR OPERATING THIS PUMP IN CONFORMANCE WITH O.S.H.A. GUIDELINES FOR DISPENSING AND TRANSFERRING HAZARDOUS, FLAMMABLE OR COMBUSTIBLE LIQUIDS.

FOR THE PERSONAL SAFETY OF THE OPERATOR AND OTHERS WHO MAY COME INTO CONTACT WITH ANY PUMPS OF THIS NATURE AND FLAMMABLE LIQUIDS:

- When pumping hazardous chemicals, wear a face shield, proper attire and approved respiratory equipment.
- Keep your work area clean and clear of clutter with sufficient lighting for proper visibility and in creased safety.
- Visitors and observers should remain at a safe distance from the area of work, unless the precautions above have been observed.
- The work area should be child-proof. Install padlocks, master switches and remove all starter keys for the safety of all children.

GENERAL SAFETY INFORMATION AND IMPORTANT GUIDELINES:

- Always follow electrical and safety codes when using a hand pump.
- Information regarding NEC (National Electrical Codes) and NFPA (National Fire Protection Association) Codes can be obtained from the National Fire Protection Association, Inc., Battery march Park, Quincy, MA 02269, phone number 1-800-344-3555 or online at www.nfpa.org.
- Make sure pump containers are grounded when using with flammable liquids to avoid static electricity.
- Flush out pump prior to using. Processing lubricants could contaminate the fluid.
- Know the pump uses, limitations and all potential hazards before using this pump. Take note of all warning statements which indicate potentially dangerous situations for the operator, bystanders or equipment.

IMPORTANT SAFETY INFORMATION

⚠ WARNING: THIS PUMP IS SUITABLE FOR MANY LIQUIDS, BUT NOT ALL LIQUIDS. KNOW YOUR PUMP AND THE LIQUIDS YOU WILL BE PUMPING THROUGH THE PUMP.

- This pump should only be used with liquids compatible to the component material of the pump (See Specifications for component materials). The chemical supplier may be contacted with questions regarding chemical compatibility and the proper use and handling of the chemical.
- Misuse of this pump or use of incompatible liquids will void the warranty.
- Dispensing and/or transferring hazardous, flammable or combustible liquids should only be done in areas suitable for this purpose.


⚠ WARNING: WHEN FILLING DRUMS, CANS OR OTHER CONTAINERS WITH FLAMMABLE LIQUIDS, BOTH CONTAINERS SHOULD VOID WARRANTY. BE GROUNDED AND SECURELY FASTENED TO DISCHARGE STATIC ELECTRICITY AND MINIMIZE SPARKS CAUSED BY STATIC ELECTRICITY.

- All warnings and instructions pertain not only to petroleum fuel, oils, kerosene, diesel fuel, lubricating oil & antifreeze (ethylene-glycol), but to any hazardous, flammable or combustible liquids.
- Only store hazardous, flammable or combustible liquids in a cool location. Keep stored hazardous, flammable or combustible liquids far from open flames or heat.
- Always keep hazardous, flammable or combustible liquids, other fuels and cleaners out of reach of children
- A maintained fire extinguisher should be kept nearby when working with hazardous, flammable or combustible liquids.
- Provide positive shut-off valves on all fixed fuel supplies. Fuel lines must be made of steel piping, leak-free and securely fastened.
- Adequate ventilation is essential! Clean up all spills immediately when pumping or handling flammable liquids.
- ABSOLUTELY NO SMOKING!
- DO NOT use torches or apply fire or flames to this pump, pump components or any containers used with this pump.
- Be sure that the discharge line is secure before pumping. An insecure discharge line may slide, possibly causing personal injury and/or damage to property.
- Over tightening non-metallic fittings will strip threads. Once fitting is "hand tight" turn one more full rotation, this is usually enough to prevent leaking. Thread sealant can be used on all threaded joints, including the delivery spout.
- Before each use, check hoses for weak or worn spots. Check the security of all connections.
- Occasionally inspect the pump and components, performing routine maintenance when required.
- Dispel all liquids from the pump and components before performing routine maintenance.

⚠ WARNING: AFTER USE, STORE ALL PUMPS USED FOR TRANSFERRING HAZARDOUS, FLAMMABLE OR COMBUSTIBLE LIQUIDS IN A WELL-VENTILATED AREA.

PARTS LIST

No.	Description	Qty.
1	Cover Clamp (Die Cast Flange)	1
2	Cover	1
3	Machine Screw 1/4 x 3/8 in. & Hex Nut 1/4 in.	1
4	Machine Screw 1/4 x 3/4 in. & Hex Nut 1/4 in.	1
5	Packaging Nut	1
6	Barrel	1
7	Plunger Spring	1
8	Pipe Nipple	1
9	Die Cast Head	1
10	Bent Nozzle	1
11	PVC Hose Pipe	1
12	Thumb Screw	1
13	Plunger Rod	1
14	Plunger Assembly (Rod, Piston, Lock, Washer & Hex Nut)	1
15	U-clip	1
16	Handle Pivot.	1
17	Pumping Handle.	1
18	Non Return Valve.	1

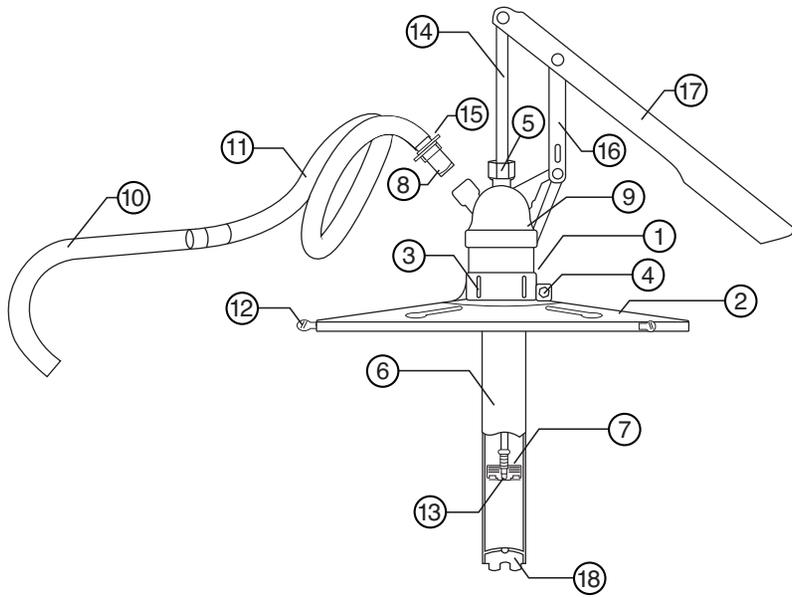

▲ Always wear eye protection when working with pumps.

ALSO AVAILABLE FROM PERFORMANCE TOOL



REPLACEMENT PARTS AVAILABLE:

12 in. Grease Gun Flex Hose	W54210
18 in. Grease Gun Flex Hose	W54211
Grease Gun Coupler	W54212
Grease Injector Needle	W54213