DESCRIPTION

The **Iboco P Series Spiralite** universal spiral wrapping is great for fast and economical grouping of wire bundles.

FEATURES

- *Polyethylene construction*
- *Provides flexible connection between panel and door*
- *Strong, yet simple to install and remove*

IBOCO

P Series

ORDERING INFORMATION

MODEL	FOR WIRE BUNDLES in (cm)	FT (m) (per carton*)
P2	1/4 to 1 (0.64 to 2.54)	80 (24)
P3	3/8 to 2 (0.95 to 5.08)	80 (24)
P4	1/2 to 3 (1.27 to 7.62)	65 (20)
* Available in carton quantities only – order quantity 1 = 1 carton		

DESCRIPTION

The **Iboco ST, STS support brackets** give you options in mounting your DIN rail. These are made of cold-rolled steel treated with galvanic zinc plating and passivation.
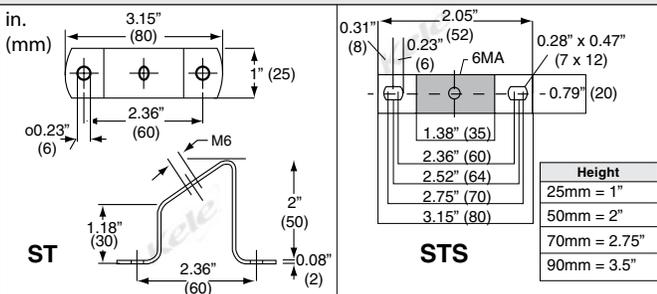
FEATURES

- *Includes 6mm screws*

IBOCO

STS Series   **ST Series**

DIMENSIONS

in. (mm)

3.15" (80)
1" (25)
2.36" (60)
o0.23" (6)
M6
1.18" (30)
2" (50)
2.36" (60)
0.08" (2)
ST

0.31" (8)
0.23" (6)
2.05" (52)
6MA
0.28" x 0.47" (7 x 12)
0.79" (20)
1.38" (35)
2.36" (60)
2.52" (64)
2.75" (70)
3.15" (80)
STS

Height	
25mm = 1"	
50mm = 2"	
70mm = 2.75"	
90mm = 3.5"	

ORDERING INFORMATION

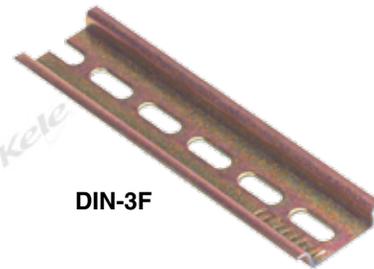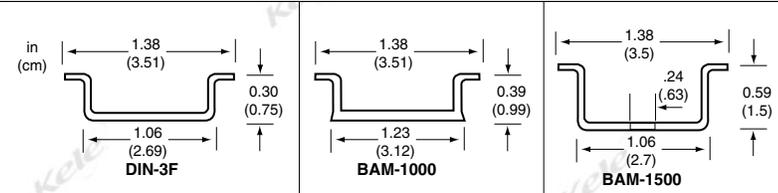| MODEL	DESCRIPTION
ST	DIN Rail support bracket
STS-25	1" din rail support bracket
STS-50	2" din rail support bracket
STS-70	2.75" din rail support bracket
STS-90	3.5" din rail support bracket

DESCRIPTION

DIN rail is the standard method for mounting relays and terminal blocks. Kele offers five models with different features.

FEATURES

- *One meter length (39.4")*   • *Steel or aluminum*
- *Perforated*

DIMENSIONS

in (cm)

1.38 (3.51)
0.30 (0.75)
1.06 (2.69)
DIN-3F

1.38 (3.51)
0.39 (0.99)
1.23 (3.12)
BAM-1000

1.38 (3.5)
.24 (.63)
0.59 (1.5)
1.06 (2.7)
BAM-1500

DIN-3F

RoHS ☑

ORDERING INFORMATION

MODEL	DESCRIPTION
BAM-1000	35 mm aluminum DIN mounting rail 39.4" (1m)
BAM-1500	35 mm aluminum DIN mounting rail 39.4" (1m) 15mm height
DIN-3F	35 mm DIN rail, steel, 39.4" (1m), RoHS compliant
DINRALU	DIN rail, aluminum, 39.4" (1m)
DINRSTL	DIN rail, steel, 39.4" (1m)

RELATED PRODUCTS

DINCLIC-FM4	Mounting clips, 4 mm screw size