

Anti-Ligature Shower Valve Trim

FEATURES:

- Easy grip, ligature resistant handle
- Heavy, all metal construction
- Valve not included
- Can be installed back to back
- Roughing-in template included
- Minimum operating water pressure 20 psi flowing
Maximum operating water pressure 80 psi statis
Minimum operating water temperature 40°F
Maximum operating water pressure 140°F

VALVE OPTIONS:

- CPV-PB: Pressure Balance Valve
Sweat & Thread Connections

STOCK FINISH:



PC


STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ADA compliant
- ASSE 1016

WARRANTY:

Visit www.speakman.com for full product warranty information

- See Speakman.com For Warranty Information

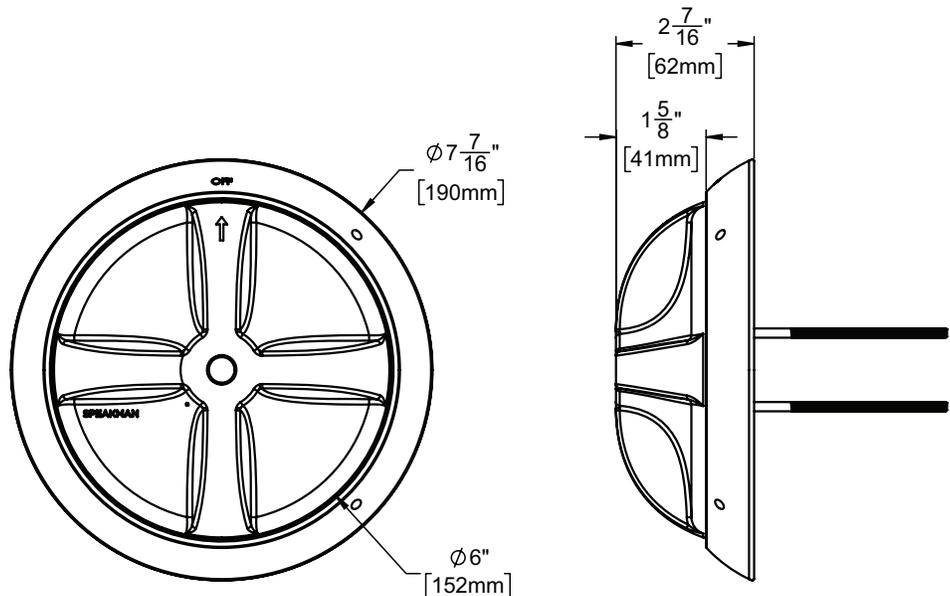

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-SEPTEMBER 2024