

NOTES: UNLESS OTHERWISE SPECIFIED
1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD36-0000.

2. MATERIAL SPECIFICATIONS:
ALL METAL PARTS: BRASS PER ASTM B16
INSULATOR: PTFE PER ASTM D1710
O-RING: SILICONE RUBBER PER ZZ-R-765

3. FINISH SPECIFICATIONS:
BODY: .000015 MIN GOLD PER ASTM B4888 OVER
.000050 MIN NICKEL PER AMS-QQ-N-290
CONTACT: .000050 GOLD PER ASTM B4888 OVER
.000050 MIN NICKEL PER AMS-QQ-N-290







4. ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC - 18 GHz

5. SOLDER PATTERN TO BE DEFINED PER CUSTOMER REQUIREMENTS

6. AGILENT PART NUMBER: BMA PLUG

7. AGILENT DRAWING NUMBER: BMA PLUG

8. CAP, WINCHESTER P/N 00-3584G005 PURCHASED SEPERATELY.

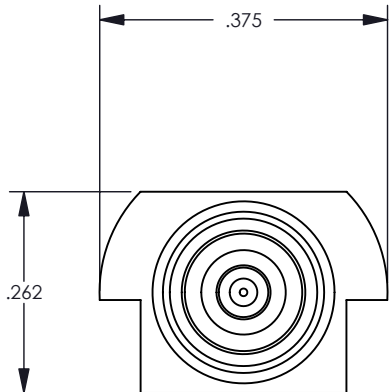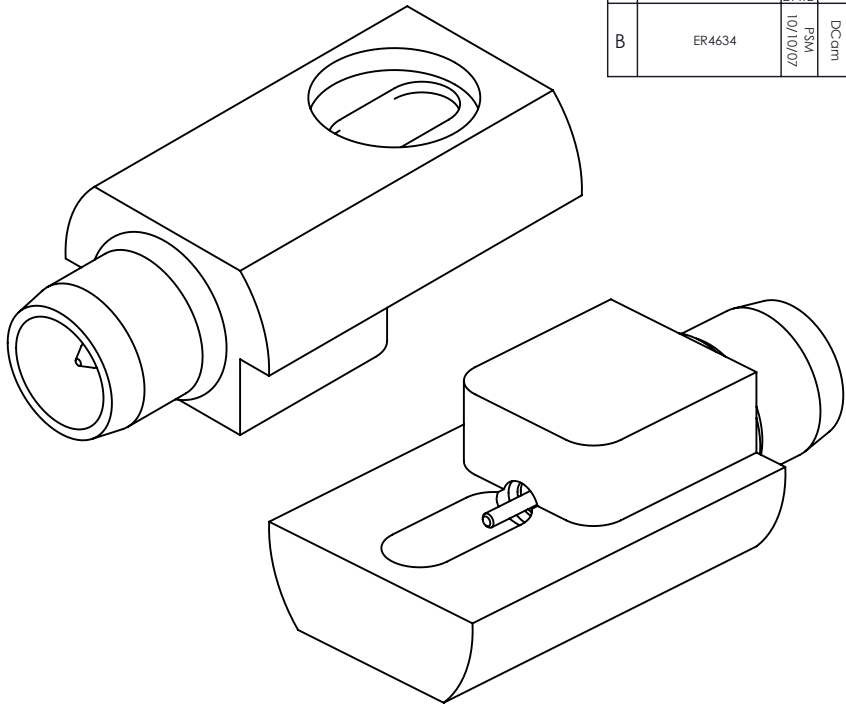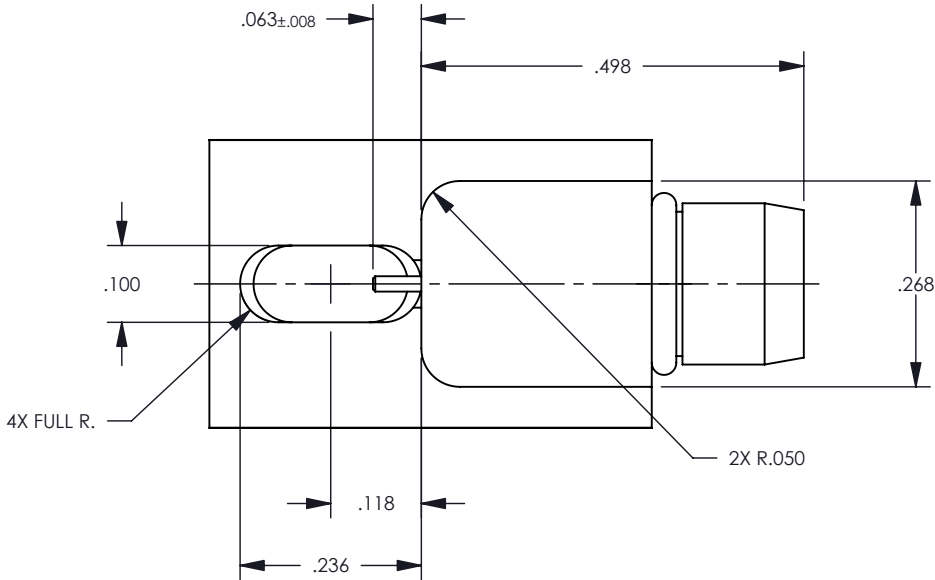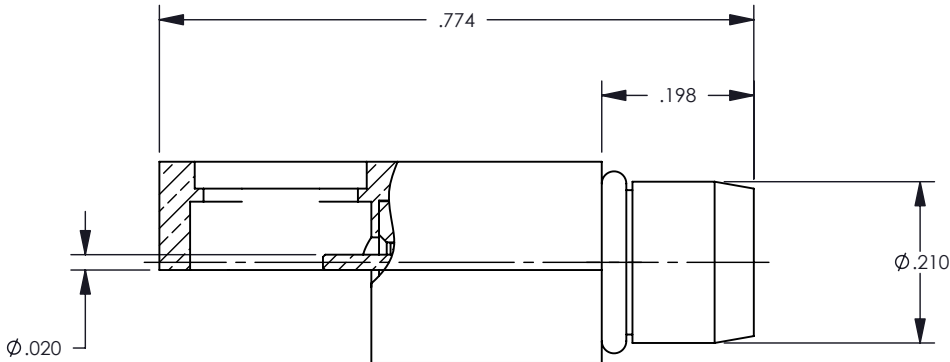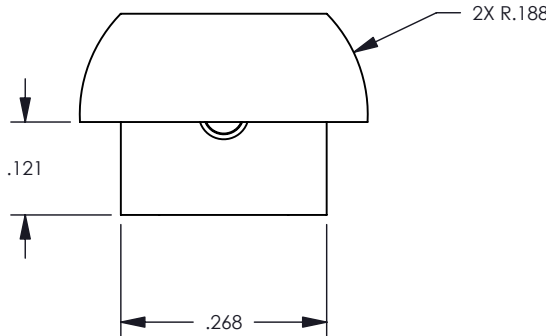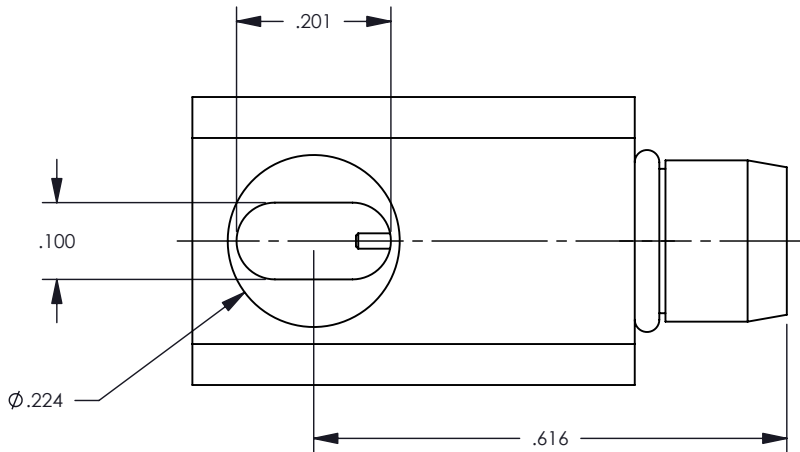

CATALOG P/N: 360-086-0041H

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 4:1				 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER DRAWING				BMA END LAUNCH PLUG			
DRAWN JED	DATE 01/05/04	APPROVED JEM	DATE 01/07/04	B SD360-086-0041H SHT 1 OF 1 REV B			
APPROVED CWB	DATE 01/07/04	APPROVED SD	DATE 01/08/04				