


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	06/27/13	AM

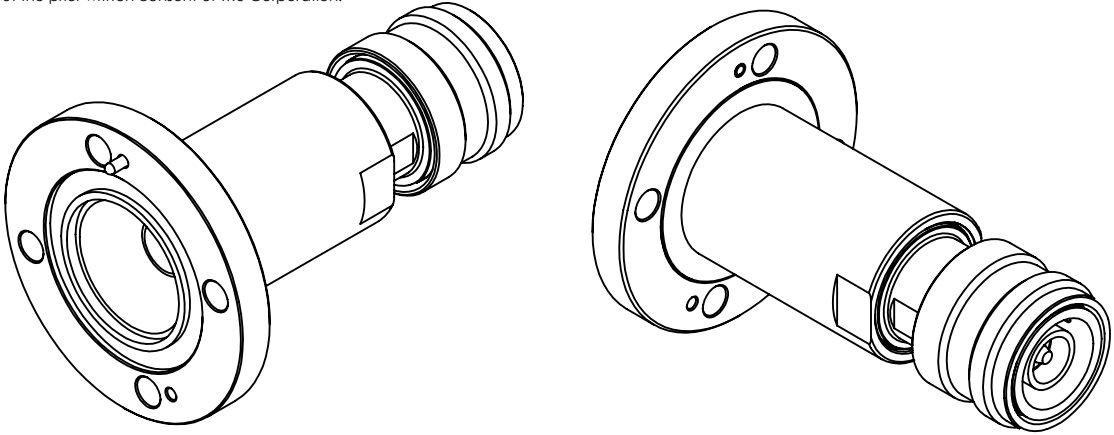

1-5/8 EIA(f)

(ϕ 1.75)

SQS(m)

ENGINEERING DATA

ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: DC to 500 MHz



INTERFACE:
1-5/8 EIA: PER EIA RS-225 & MIL-DTL-24044
SWIVEL FLANGE W/ALIGNMENT PIN
SQS(m): PER TRU STANDARD




MATERIAL:
BODIES & COUPLING RING: BRASS
CENTER CONTACTS: BRASS
INSULATORS: PTFE

FINISH:
BODIES & COUPLING RING: NICKEL PLATED
CENTER CONTACTS: SILVER PLATED

NOTES:

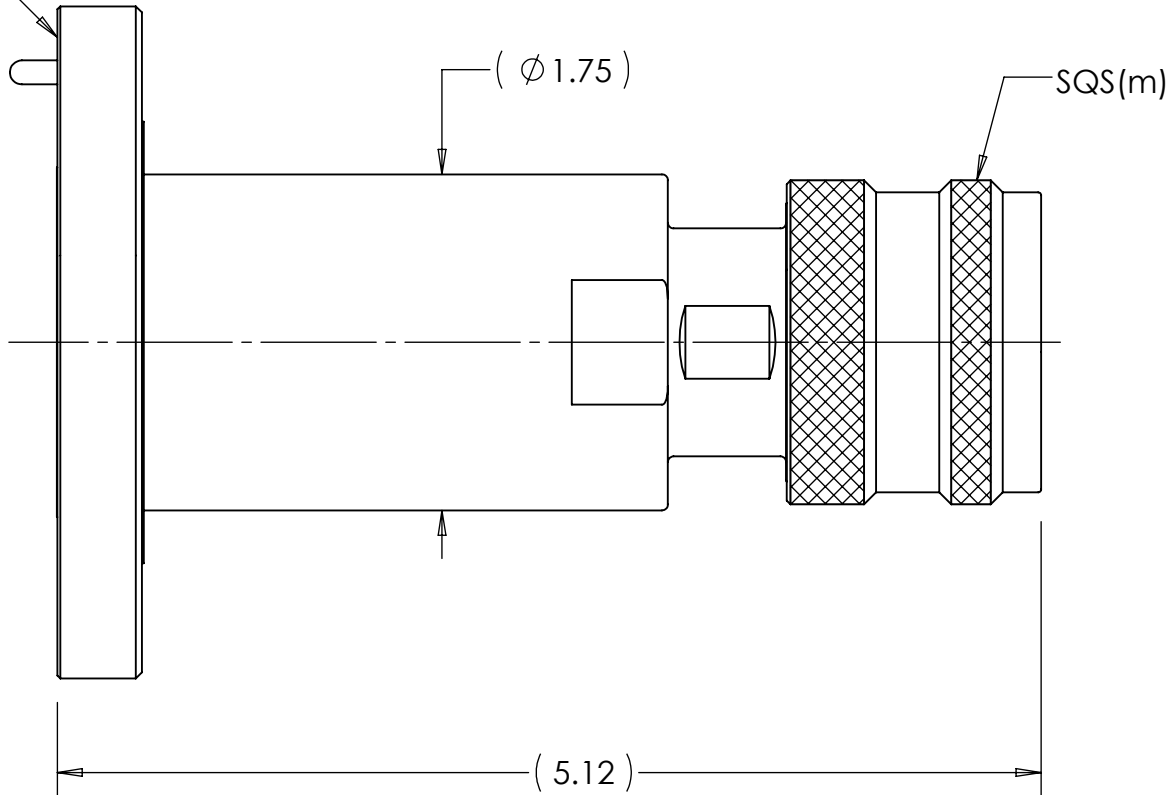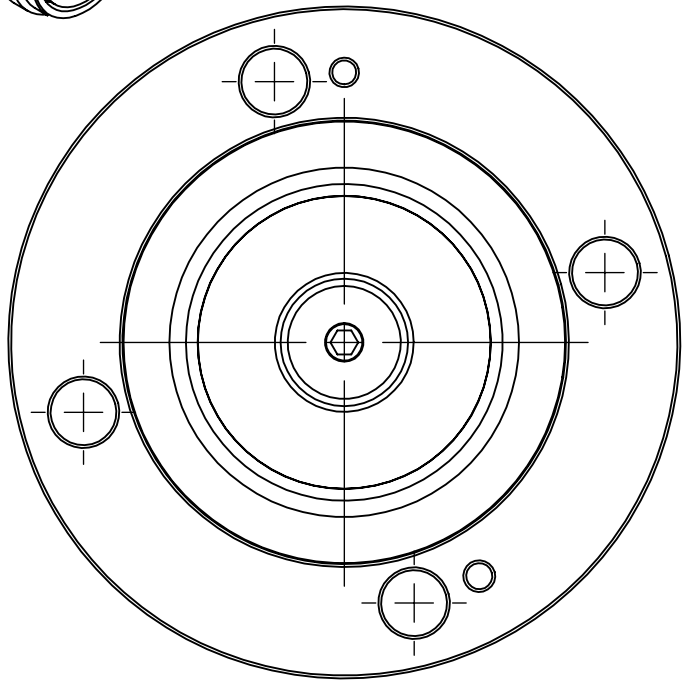- UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.



MATERIAL	DO NOT SCALE DRAWING		DRAWN AM	DATE 06/27/13	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960 <small>EXPERIENCE. TRU INNOVATION.</small>		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES: 		ENG APPR. AM	DATE 06/27/13			
			MFG APPR.	DATE			
			OTHER APPR.	DATE			
COMMENTS:	THIRD ANGLE PROJECTION 		TITLE: CONNECTOR, COAXIAL 1-5/8 EIA(f) to SQS(m) ADAPTER		REV -		
			SIZE B	DWG. NO. TRU-12363			
surface area: sq inch		weight: lbs		CAGE CODE: 92180		SCALE: 1:1	SHEET 1 OF 1