



COMPRESSION X FIP VINYL FAUCET CONNECTOR

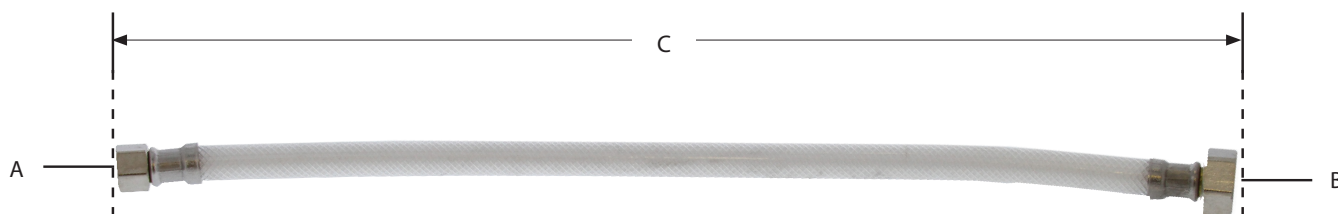

- Used for supplying water to faucets
- Working pressure: 124 PSI
- Inner core of PVC withstands temperatures of 68°F-158°F
- Quick and easy installation
- No special tools needed
- Flexible vinyl connector resists kinking and creasing
- Nickel plated nut
- cUPC listed
- Meets NSF/ANSI/CAN 372, NSF/ANSI/CAN 61: Q ≤0.5, and NSF/ANSI 14 standards
- Lead free
- ASME A112.18.6/CSA B125.6



Part No.	Compression - A	FIP - B	Length - C
S04400	0.37"	0.50"	9"
S04401	0.37"	0.50"	12"
S04402	0.37"	0.50"	16"
S04403	0.37"	0.50"	20"
S04450*	0.37"	0.50"	24"
S04404	0.37"	0.50"	30"
S04455*	0.37"	0.50"	36"
S04405	0.50"	0.50"	12"
S04406	0.50"	0.50"	16"
S04407	0.50"	0.50"	20"
S04408	0.50"	0.50"	30"

*Part is UPC only