


PARTS PACKING CONFIGURATIONS




- A. HEADBOARD 1 PC
- B. HEADBOARD LEG 1L/1R
- C. HEADBOARD STRETCHER 1PC
- * HARDWARE PACK



BOX #2:

- D. FOOTBOARD 1 PC
- E. SLAT ROLL 1 SET
- * HARDWARE PACK

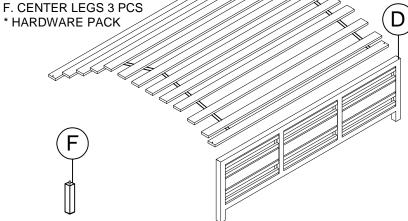


BOX #3:

G. SIDE RAIL 2 PCS


H. CENTER SLAT SUPPORT 1 PC

* HARDWARE PACK

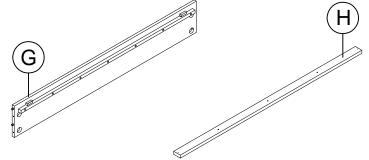

HARDWARE	PACKE	ED IN	BO	X #1

No	Description	Image	Quantity	
1	ALLEN BOLT (8x40mm)		12 PCS	
2	SPRING WASHER (Ø9x13mm)	0	12 PCS	
3	FLAT WASHER (9x19mm)	0	12 PCS	
4	ALLEN KEY		1 PC	



HARDWARE	DVCKEDI	N DOV #1

No	Description	Image	Quantity
5	HANGER BOLT (8x80mm)		8 PCS
6	HALF MOON WASHER (Ø9)		8 PCS
7	NUT (Ø9)	6	8 PCS
8	WRENCH (K13)	=	1 PC
9	WOOD SCREWS (4x30mm)	****	4 PCS

HARDWARE PACKED IN BOX #3

No	Description	Image	Quantity
10	WOOD SCREWS (4x30mm)	*****	2 PCS











PAGE 1 OF 5




STEP 1:

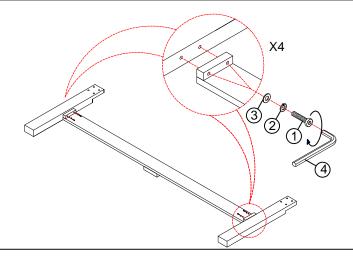

STEP 2:

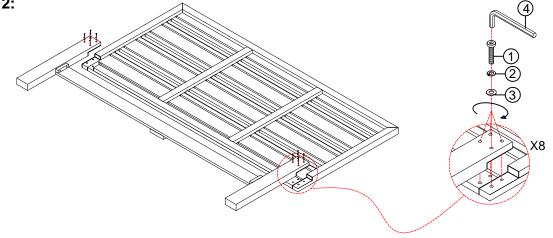

STEP 3:

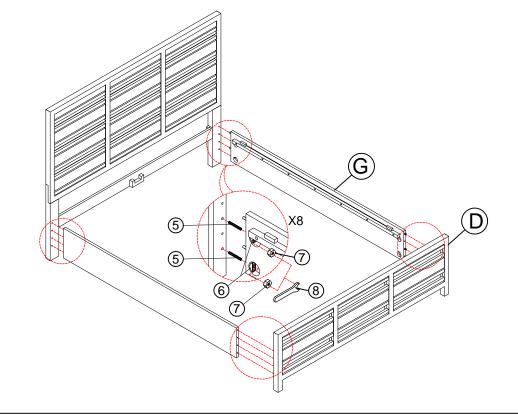

PAGE 2 OF 5







STOP

- * IF USING BED FRAME WITH ADJUSTABLE MATTRESS BASE, SKIP TO APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- * IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION CONTINUE TO STEP 4.


STEP 4:

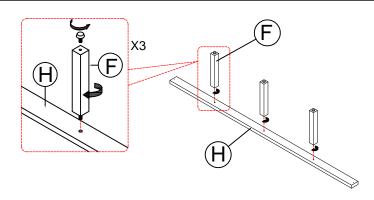

STEP 5:

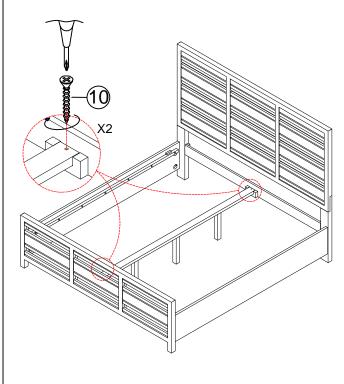


STEP 6:

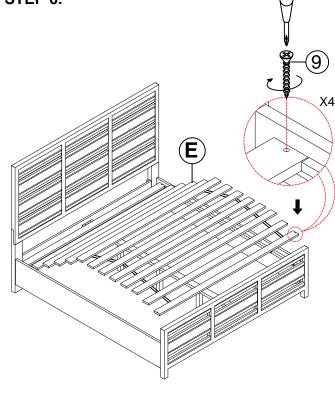

INSTRUCTIONS FOR ADJUSTING LEVELER

POSITION THE BED IN YOUR SPACE AND LOCATE THE LEVELER UNDER EACH SUPPORT LEG. TURN THE LEVELER COUNTER-CLOCKWISE TO EXTEND THE LEVELER AND CLOCKWISE TO RETRACT IT.

ADJUST EACH LEVELER UNTIL EACH SUPPORT LEG IS APPLYING EQUAL, UPWARD PRESSURE ON THE SUPPORT SLAT.



MAINTENANCE INSTRUCTIONS:

REMOVE YOUR MATTRESS, AND BOX SPRING IF APPLICABLE, BEFORE MOVING YOUR BED.

LIFT YOUR BED WHEN MOVING IT; DRAGGING CAN DAMAGE THE SUPPORTS.

RE-ADJUST THE LEVELERS AFTER MOVING YOUR BED.

PAGE 3 OF 5



COMPLETED



PAGE 4 OF 5



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

- E. SLAT ROLL 1 SET
- F. CENTER SLAT SUPPORT 3 PCS
- 11. WOOD SCREW (4x30mm) 6 PCS
- * ALLEN BOLT (6x35mm) 14 PCS

STEP 1:

USE ALLEN KEY (4) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS

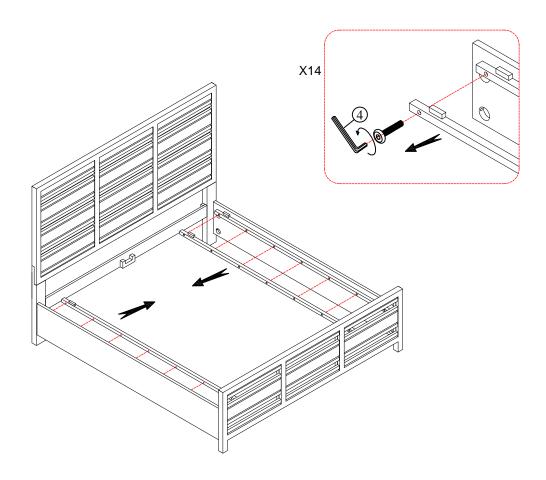

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.

PAGE 5 OF 5