

LED CEILING LIGHT ASSEMBLY/INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Min 90°C supply connductors. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

TOOLS REQUIRED


Phillips screwdriver.

ASSEMBLY AND INSTALLATION

Turn off the power at fuse or circuit breaker.

- 1. Gently take all parts out of the package, lay them on a smooth surface, unscrew the BALL NUT B and WASHER from the THREADED NIPPLE. Attach the MOUNTING BRACKET to the JUNCTION BOX using JUNCTION BOX SCREWS.
- 2. Disassemble the DECORATIVE HOOK, DECORATIVE CIRCLE and SHADE under the FIXTURE by unscrewing BALL NUTS A.
- 3. Make wire connections with WIRE CONNECTORS:
 - A- Connect the black wire from Fixture to the black supply wire.
 - B- Connect the white wire from Fixture to the white supply wire.
 - C- Attach the fixture ground wire to the MOUNTING BRACKET with the GREEN GROUND SCREW. Then connect it to the supply ground wire with a WIRE CONNECTOR. Carefully tuck wires back into the JUNCTION BOX.
- 4. Attach the FIXTURE to the MOUNTING BRACKET through SCREW HOLES as shown, and secure it with WASHER and BALL NUT B.
- 5. Select the color temperature you need.
- 6. Place the SHADE on the FIXTURE, attach DECORATIVE CIRCLE and DECORATIVE HOOK over the SHADE, secure with BALL NUTS A.

ASSEMBLY AND INSTALLATION (CONT.)

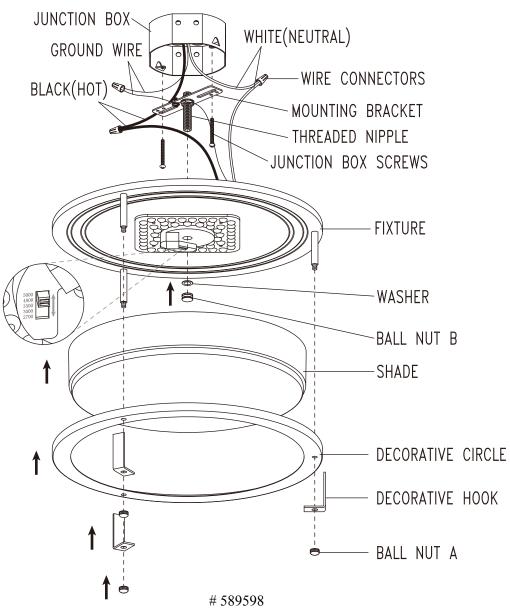

IF IN DOUBT ABOUT ELECTRICAL INSTALLATION, CONSULT A LICENSED ELECTRICIAN.

Customer Service 1-800-558-8700

Turn on the power at fuse or circuit breaker.