
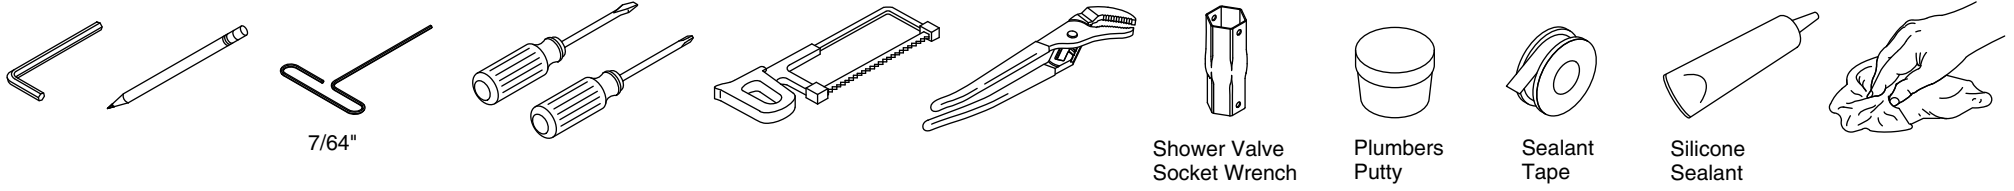
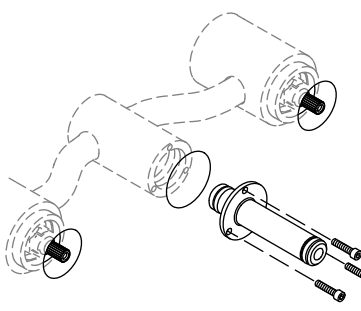
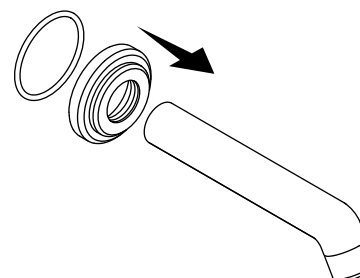
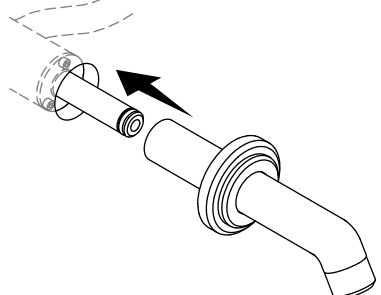
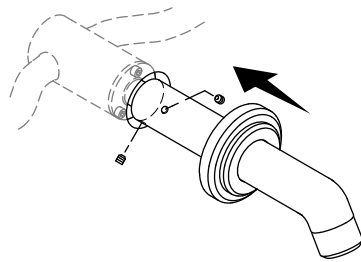
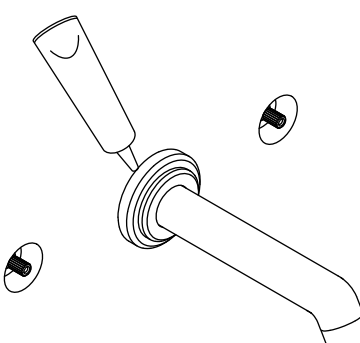
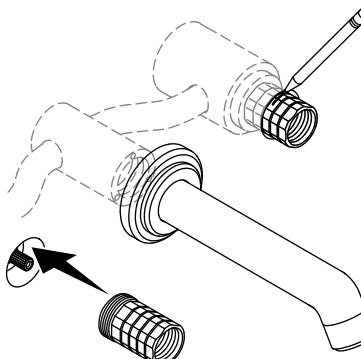
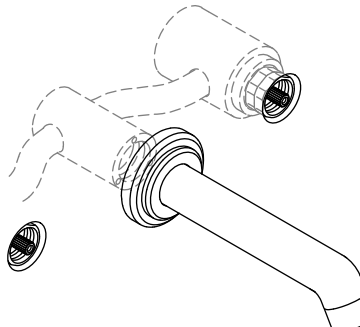
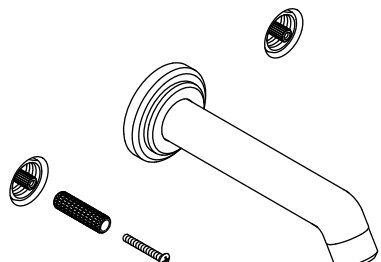




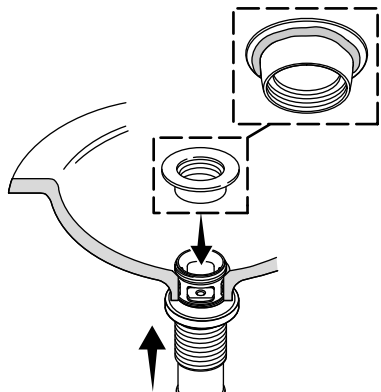
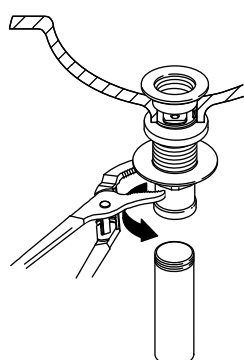
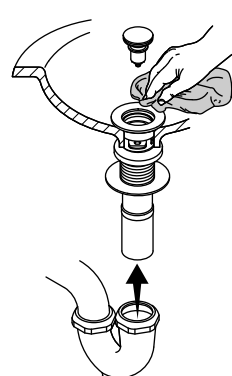


KALLISTA®

Installation Guide



<p>⚠ WARNING: Risk of scalding. High water temperature can cause severe burns. Set the water temperature at or below 120°F (49°C) following the adjustment procedure in the valve Installation and Care Guide.</p>	<p>Observe all local plumbing and building codes. Record your model number below for future reference:</p>	<p>1 Attach the spout shank to the valve with the three socket head screws.</p> 	<p>2 Make sure the O-rings are seated in the spout escutcheon, then slide onto the spout. Use care not to scratch the surface.</p> 	<p>3 With the aerator pointing down, slide the spout over the shank until flush with the finished wall.</p> 
<p>4 Secure the spout with the setscrews. Slide the escutcheon against the wall. Use care not to scratch the surface.</p> 	<p>5 Optional: If desired, apply a bead of clear silicone sealant around the escutcheon.</p> 	<p>6 Using a shower valve socket wrench, fully thread the sleeve onto the valve. Mark where it is flush with the wall.</p> 	<p>7 Remove the sleeve and cut at the notch closest to the mark, on the inside edge.</p> 	<p>8 Reinstall the sleeve. Install the longest extension onto the valve stem with the longest screw.</p> 
<p>9 Place the handle horizontally onto the stem extension. Thread the escutcheon into the sleeve.</p> 	<p>10 If the escutcheon is not flush with the wall when fully threaded, use the next shorter extension and screw.</p> 	<p>11 To adjust handle position, rotate the adapter one tooth. Repeat until aligned.</p> 	<p>12 Disassemble the drain.</p> 	<p>13 Apply plumbers putty to the flange and attach.</p> 
<p>14 Tighten the nut. Apply thread sealant to the drain pipe threads.</p> 	<p>15 Install the stopper. Connect the trap. Remove excess sealant.</p> 	<p>16 Remove the aerator using the key.</p> 	<p>17 Turn on the water for 1 minute to remove debris. Reinstall the aerator.</p> 