

EML4

LED Compact Emergency Light

Product Description

The EML4 LED emergency light combines a low-profile, standard design in an affordable package. The EML4 Series is available in white and offers universal mounting, a test button with AC indicator, and damp location listing. With fully adjustable heads, the EML4 Series complements any design application.

Construction

- Injection molded thermoplastic ABS housing.
- UL-94v-0 Flame rating - Flame Retardant
- Adjustable heads for aiming light where required
 - Head tilt: +45°/-10°
 - Head rotation: ±30°
- Damp location rated
- Operating temperature: 32°F - 104°F (0°C - 40°C)

Optical System

- Precision engineered Prismatic Lens

Electrical

- Input power 2.1W at 120/277VAC
- 90 minute capacity

Mounting and installation

- Easy installation into a standard junction box or conduit
- Mounting plate secures to the wall first for ease of wiring and installation

Finish

- White unpainted ABS Plastic

Warranty

- 1-year limited system warranty standard

Photometric Data

EML4



Input Voltage (VAC)	120/277
System Level Power (W)	2.1
Delivered Lumens (Lm)	158
System Efficacy (Lm/W)	76.2
Correlated Color Temp (K)	6136
Color Rendering Index (CRI)	83

Project

Catalog

Type

Date

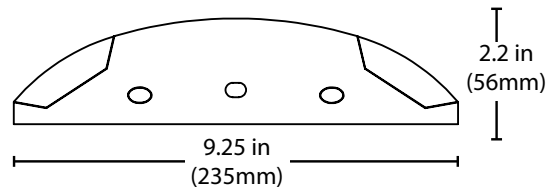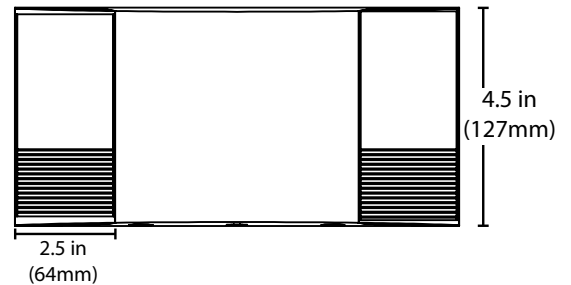

Ordering Information

Example: EML410UNVWH

Series	Version	Voltage	Housing Color
EML4	10 (1.0)	UNV (120-277V)	WH (white)