


DWG. NO.		451-980-0631H	
REV	DESCRIPTION	BY DATE	APPD
C	ECR 7567	JW 12/19/02	JW

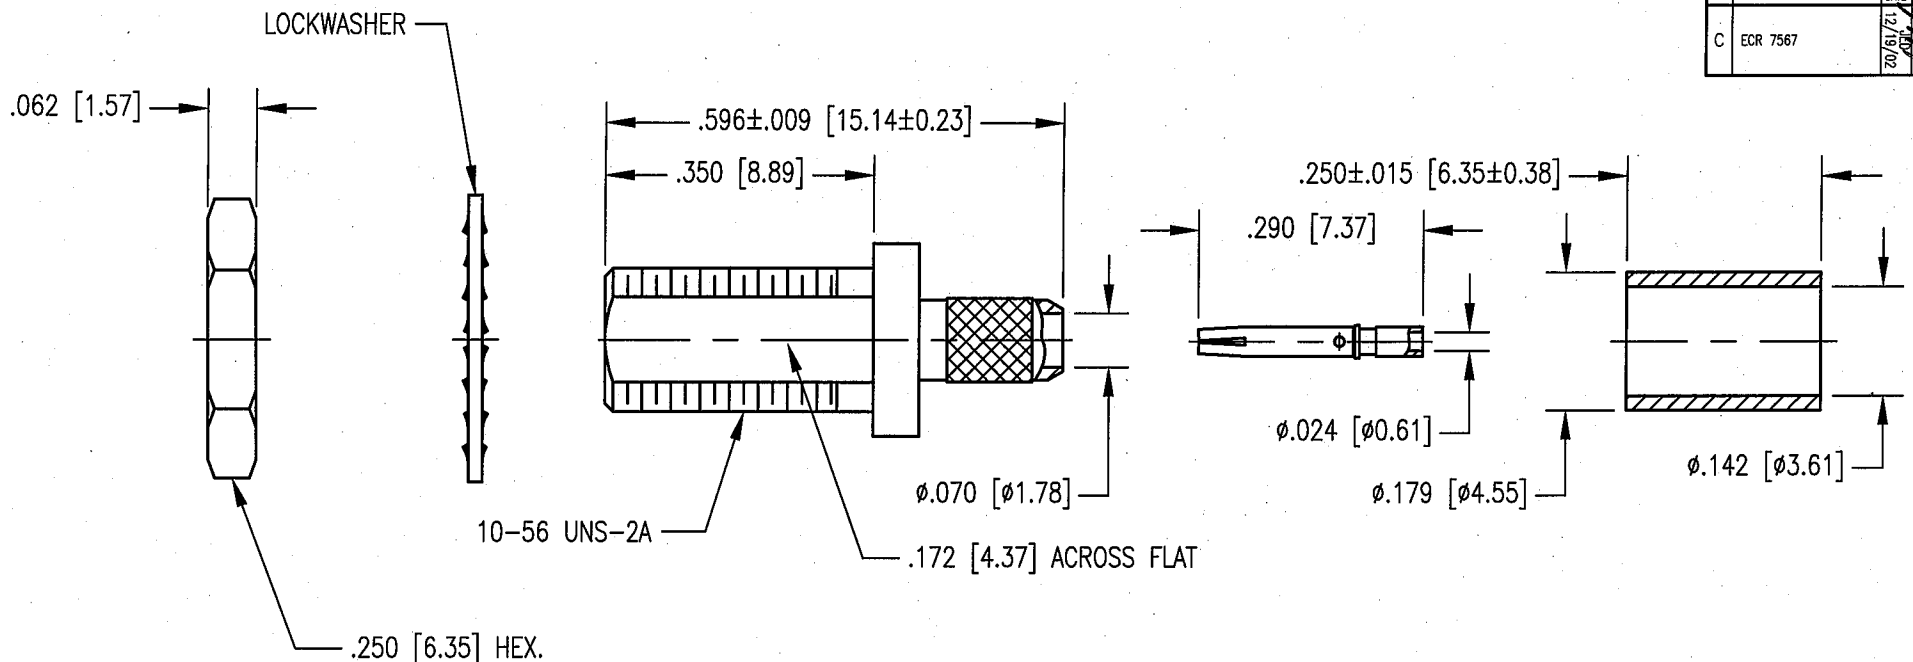

NOTES:

- MATERIALS:  
 BODY AND NUT: BRASS PER ASTM B16  
 CONTACT AND FERRULE: COPPER ALLOY  
 INSULATORS: TEFLON PER ASTM D1710  
 LOCKWASHER: PHOSPHOR BRONZE PER ASTM B106
- FINISH:  
 BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER  
       .000050 MIN. NICKEL PER QQ-N-290  
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER  
       .000050 MIN. NICKEL PER QQ-N-290  
 FERRULE, NUT AND LOCKWASHER: .000005 MIN. GOLD PER MIL-G-45204 OVER  
       .000050 MIN. NICKEL PER QQ-N-290
- FOR USE WITH RG-316 DOUBLE SHIELD CABLE OR EQUIVALENT.
- FOR CABLING PROCEDURE USE CAP 9-08 WITH TRIMMING DIMENSIONS SHOWN.
- CRIMP FERRULE WITH .151 HEX DIE.

CABLE TRIMMING DIMENSIONS

RECOMMENDED MOUNTING HOLE

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		<b>NORTHROP GRUMMAN</b>	
TOLERANCES: DECIMALS .XX ± .01 [0.254] XXX ± .005 [0.127] ANGLES ± 2°		Winchester Electronics 400 Park Road Watertown, CT 06795	
SCALE: 4:1		TITLE	
<b>CUSTOMER DRAWING</b>		MCX STRAIGHT BULKHEAD JACK	
DRAWN JWH	DATE 11/16/01	CHECKED KJT	DATE 11/16/01
APPROVED JEM	DATE 11/16/01	APPROVED JED	DATE 11/16/01
A		451-980-0631H	SHT. 1 OF 1 REV. C