

REV	DESCRIPTION	BY	APPD
B	REVISED AND REDRAWN PER ECR-EP964	ANG CT	PSM
		12/05/06	12/05/06



NOTES: UNLESS OTHERWISE SPECIFIED
1. FOR GENERAL SERIES SPECIFICATION, SEE SD22-0000.

2. MATERIAL SPECIFICATIONS:
BODY: BRASS PER ASTM B16
CLIP RING: COPPER ALLOY
SPRING WASHER: PHOSPHOR BRONZE PER ASTM B103

3. FINISH SPECIFICATIONS:
BODY: .000030MIN. GOLD PER ASTM B488 OVER
.000080 MIN. NICKEL PER AMS-QQ-N-290
CLIP RING: .000100 MIN. NICKEL PER AMS QQ-N-290
OVER COPPER FLASH PER ASTM B734
SPRING WASHER: .000005 MIN. GOLD PER ASTM B488 OVER
.000080 MIN. NICKEL PER AMS-QQ-N-290

4. ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 20 AMPS

5. FOR USE WITH 12 AWG WIRE OR EQUIVALENT.

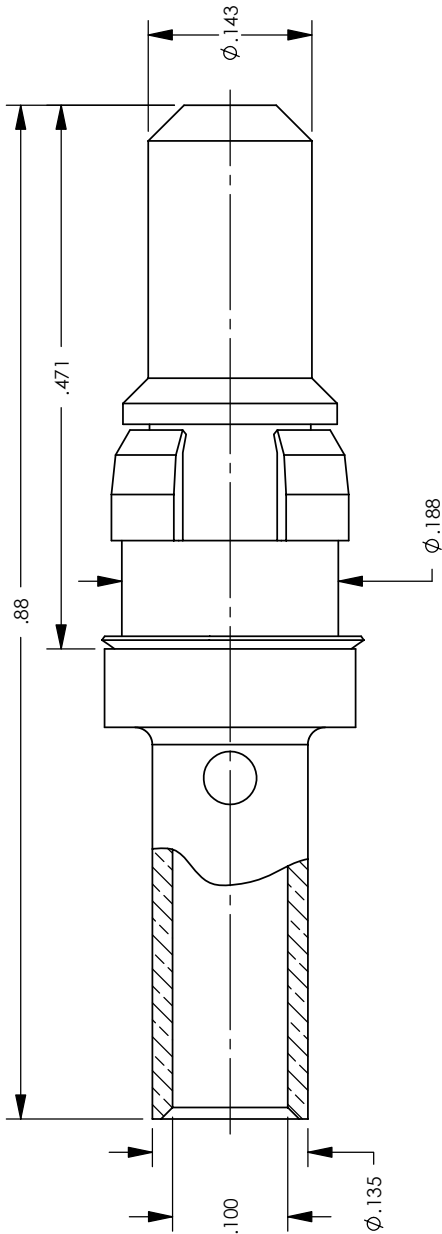

CABLE TRIM DIMENSIONS

CATALOG P/N:220-910-0001G

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [.XX] ± .01 [0.254] ANGLES: .XXX [X.X] ± .005 [0.127] ANGLES: ± 2° SCALE: 6:1				 Winchester<i>Electronics</i> Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING				RDM HIGH POWER PLUG 10/20 AMP	
DRAWN	DATE	APPROVED	DATE		
JED	04/13/99	KJT	04/13/99		
APPROVED	DATE	APPROVED	DATE		
JMC	04/13/99	JMC	04/13/99		
A				SD220-910-0001G	REV
				SHT 1	B
				OF 1	