

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	05/13/11	AM

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC to 27 GHz
VSWR MAX: 1.20:1

MECHANICAL:

INTERFACE PER IEEE 287 AND MIL-STD-348

MATERIAL:


HOUSING: STAINLESS STEEL
CONTACTS: BERYLLIUM COPPER



FINISH:

HOUSING: PASSIVATED
CONTACTS: GOLD PLATED

NOTES:

1. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

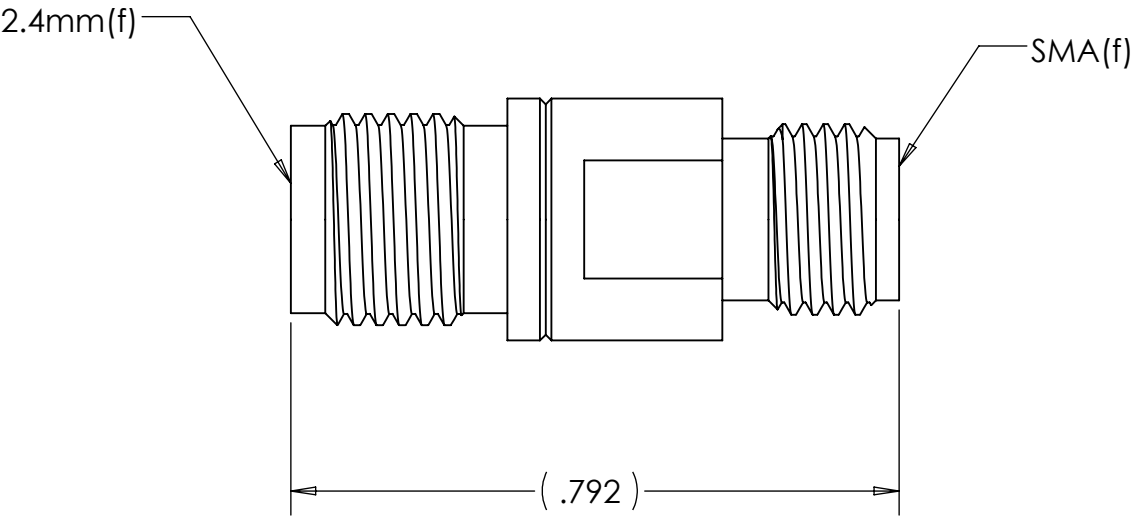

MATERIAL	DO NOT SCALE DRAWING	DRAWN AM	DATE 05/11/11	<div>TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™</div> <div>TITLE: CONNECTOR, COAXIAL 2.4mm(f) to SMA(f) ADAPTER</div>		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: 63/√	ENG APPR. AM	DATE 05/12/11			
		MFG APPR.	DATE			
		OTHER APPR.	DATE			
COMMENTS:	THIRD ANGLE PROJECTION 	SIZE B		DWG. NO. TRU-11246		REV -
surface area: sq inch weight: lbs		CAGE CODE: 92180		SCALE: 4:1	SHEET 1 OF 1	