

DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

UG-556B/U

REVISIONS		
ISSUE	CHANGES	
1	CN 551 C	09/11/63
2	CN 4319 A	AT 07/08/66
3	CN 13199 C	JL 04/17/74
4	CN 13369 A	GA 04/26/74
5	CN 23094 C	MA 02/24/82
6	CN 39468 C	REDRAWN JPK 05/15/06

UG-556B/U SD

SCALE 3 : 1

APPROX SURFACE AREA N/A

USED ON

REF: REB 49378A

N BULKHEAD JACK

DRAWN J. KENNEDY DATE 05/15/06




DESIGN PETE DATE 09/28/59

APPR. DATE

KINGS

ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

UG-556B/U

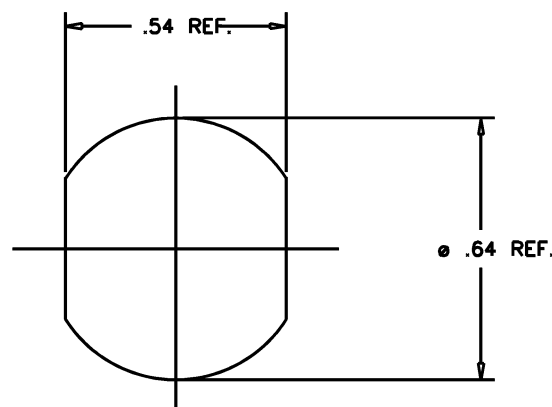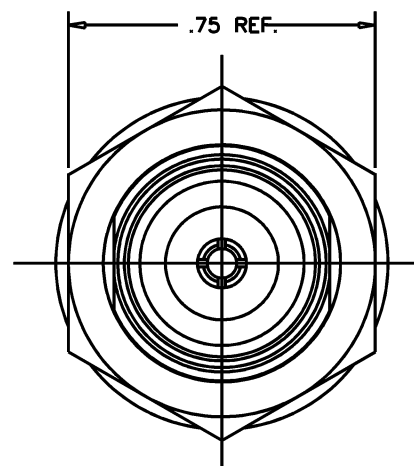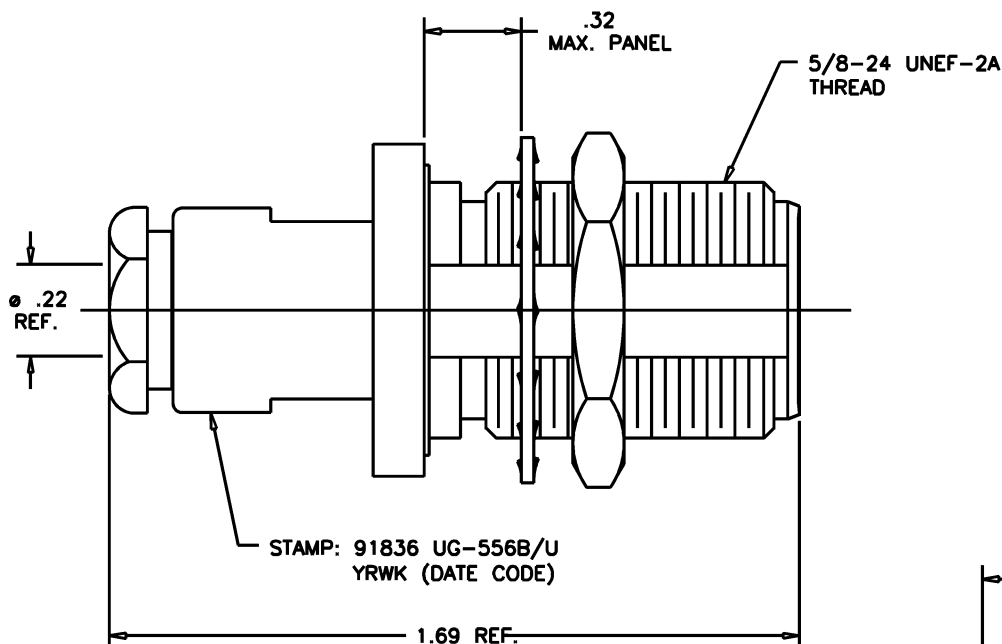

MOUNTING HOLE

GSD

NOTES:

- FOR USE WITH RG-55, 59, 141, 142 AND 223/U CABLE GROUPS.
- INTERFACE PER MIL-STD-348, FIG. 304.2.
- MATERIALS:
CENTER CONTACT: BERYLLIUM COPPER, ASTM-B196
LOCKWASHER: PHOSPHOR BRONZE, ASTM-B103
WASHER: BRASS, ASTM-B36
ALL OTHER METAL PARTS: BRASS, ASTM-B16
GASKETS: SILICONE RUBBER, A-A-59588
INSULATOR: TEFLON, ASTM-D4894
- FINISHES
ALL METAL PARTS: SILVER PLATE, ASTM-B700
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC - 11 GHz
VOLTAGE RATING: 1000 VRMS