



Azure water filter dispenser faucet
AZ701



Specifications

Descriptions

- On/off
- Maximum temperature 70° C (158°F)
- Non swivel spout
- 3/8" speedway compression
- Ceramic cartridge



Available flows

- 4.5 L/min, 1.2 gpm (US) 60psi
- 3.7 L/min, 1 gpm (US) 60psi (**AZ701-10**)
- 3.7 L/min, 1 gpm (US) 60psi (**AZ701-10**) *

EPA certification applicable to the indicated model only

Certifications

- CSA B125.1
- NSF/ANSI standard 61 and 372
- ASME A112.18.1
- CMR248 Approval
- ADA

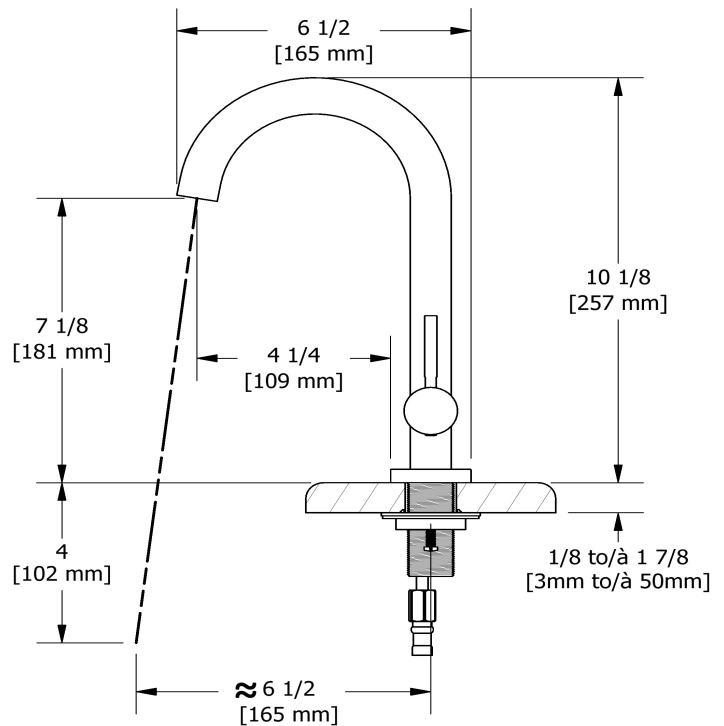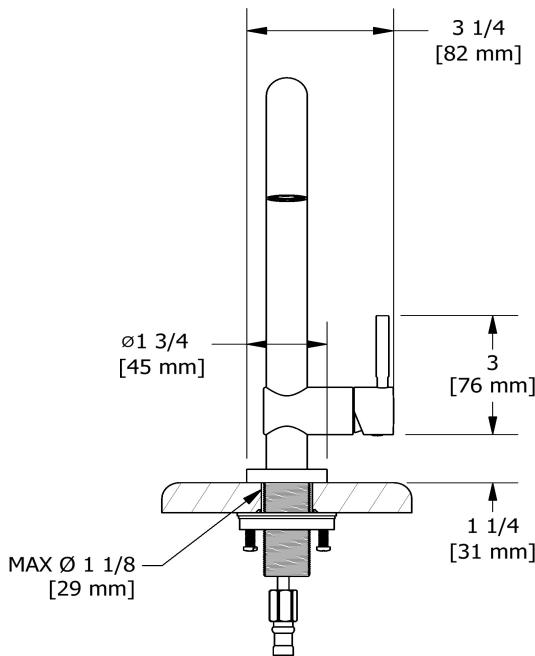

Sizes, models and finishes may differ from those presented.

Warranty

7KLV 5LREHO ,QF SURGXFW \RX KDYH SXUFKDVHG FDUULHV D /LPLWHG /LIHWLPH :DUUDQW\ RQ V LQLWLD SXUFKDVH GDWH DJDLQVW DOO PDQXIDFWXULQJ GHIHFWV \$OO RWKHU ILQLVKHV LQ DUH FRYHUHG E\ D \HDKHZDLWHQW\DRUHQQW RQ RXU SURGXFWV ZLOO EH KRQRUHG RQ\ LI W

Customer & D U H

Phone (800) 777 - 9762 | Email: customercare@houseofrohl.com | Website: houseofrohl.com/support/contact-us

Consult your local House of Rohl showroom for additional information and specifications. For complete warranty details and a list of showrooms, go to houseofrohl.com