



Hardware Installation Instructions

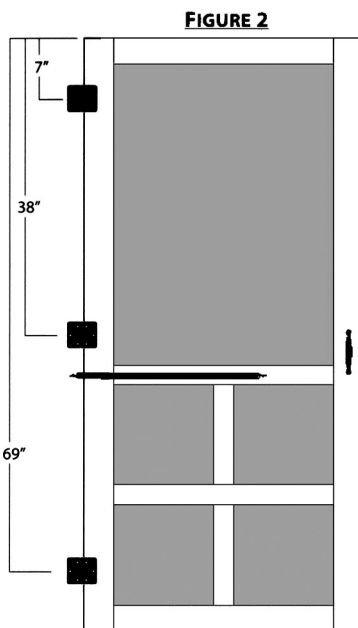

STEP ONE

1. Decide which method to use when attaching the hinges to the door (Figure 1).
2. Measure from the top of the door down to the center of each hinge (Figure 2) and mark each hole location with a pencil.
3. Using a 3/32" drill bit, drill 1/4" deep pilot holes.
4. Attach hinges using enclosed screws.




STEP TWO

1. Select the desired door handle position (Figure 2) on the outside of the door and mark the hole locations with a pencil.
2. Using a 3/32" drill bit, drill 1/4" deep pilot holes.
3. Attach the handle using the enclosed screws (Figure 3).

STEP THREE

1. Select the desired hook/latch position on the **inside** of the door and mark the hook screw location on the door jamb and eye screw location on the door with a pencil.
2. Using a 3/32" drill bit, drill 1/4" deep pilot holes.
3. Using the enclosed hardware, attach the hook screw to the door jamb and eye screw to the door (Figure 4).

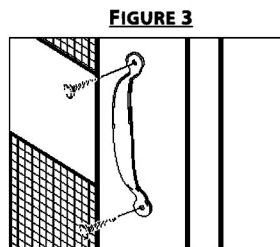

STEP FOUR

1. Select the closure spring position on the **inside** of the door (Figure 2)* and mark the screw location on the door jamb and on the door with a pencil.
*The illustration shows the closure spring on the outside of the door for visual purposes ONLY.
2. Using a 3/32" drill bit, drill 1/4" deep pilot holes.
3. Using the enclosed hardware, attach one eye screw to the door jamb and one eye screw to the door. Then, with the door closed, attach the closure spring to the two eye screws.

