


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	01/06/14	AM

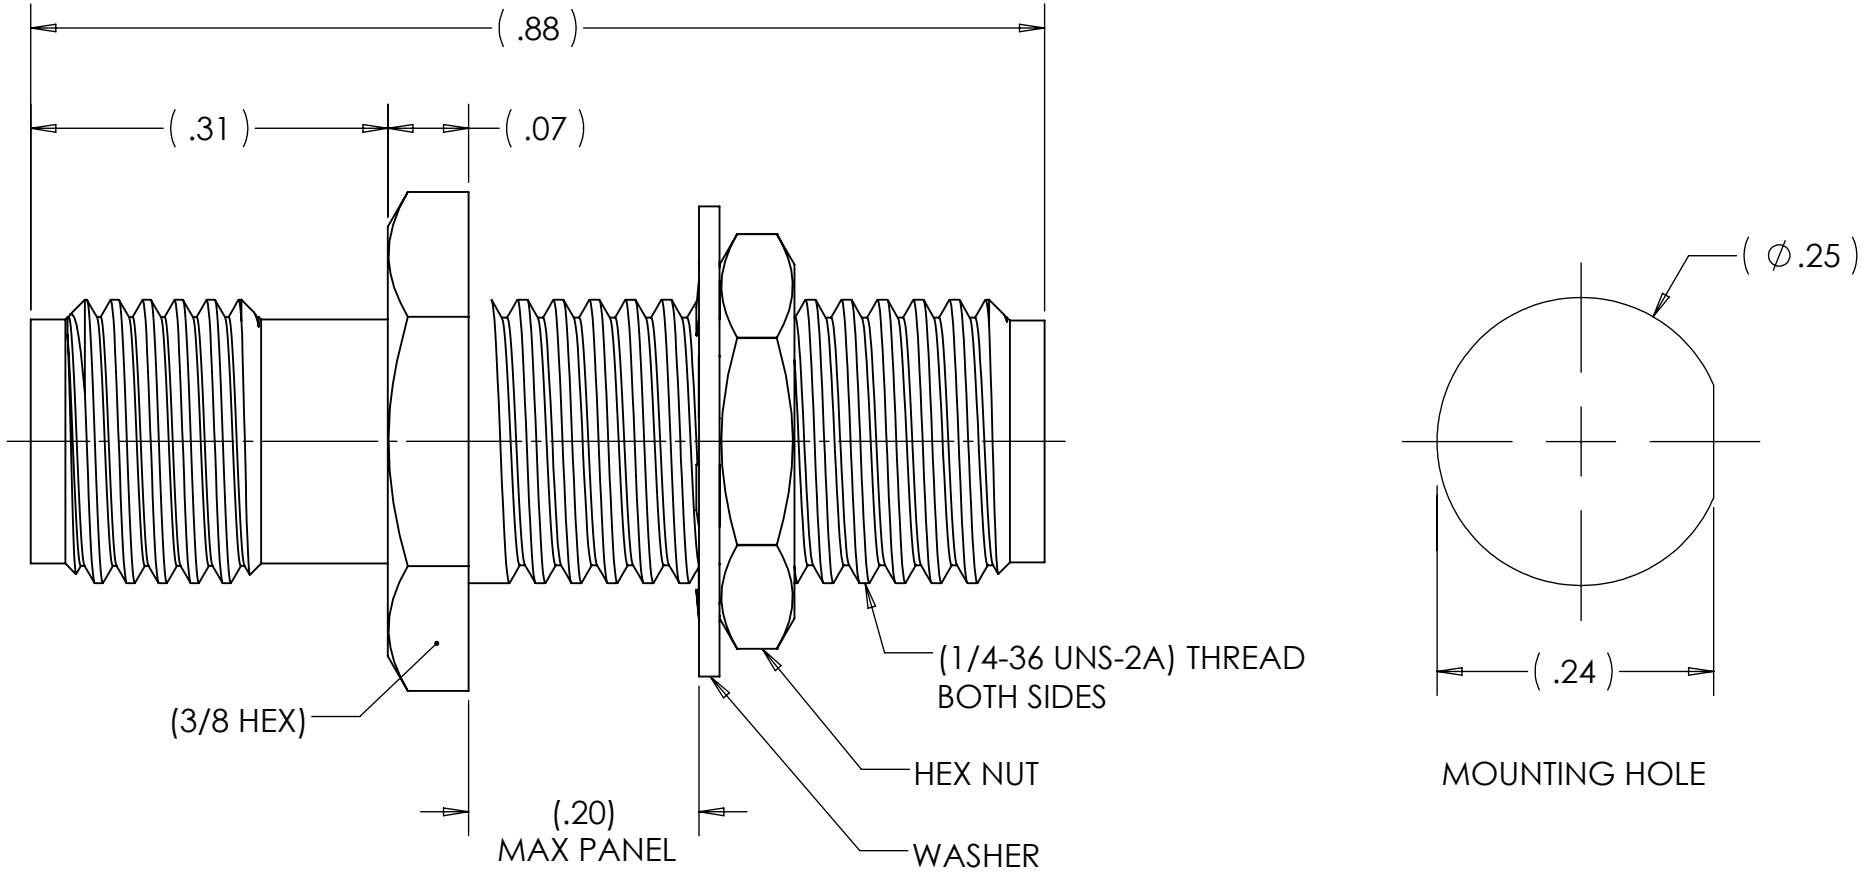

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC to 40 GHz  
VSWR: 1.25:1 MAX  
INSERTION LOSS: 0.31 dB MAX

MECHANICAL:

INTERFACE PER IEEE 287

MATERIAL:




INNER CONDUCTORS: BERYLLIUM COPPER  
DIELECTRIC: PPO  
OTHER METAL PARTS: STAINLESS STEEL

FINISH:

INNER CONDUCTORS: GOLD PLATED  
OTHER METAL PARTS: PASSIVATED

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN MVC	DATE 01/03/14	 <b>TRU Corporation</b> 245 Lynnfield St, Peabody, MA 01960	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES  TOLERANCES: FRACTIONS: $\pm 1/64$ .XX : $\pm .01$ .XXX: $\pm .005$ ANGLES: $\pm 1/2^\circ$ MACHINED SURFACES: 	ENG APPR. AM	DATE 01/06/14		
		MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL 2.92mm(f) to 2.92mm(f) BKHD ADAPTER	
		OTHER APPR.	DATE		
COMMENTS:	THIRD ANGLE PROJECTION 	SIZE <b>B</b>		DWG. NO. TRU-12583	REV -
surface area: sq inch      weight: lbs		CAGE CODE: 92180		SCALE: 6:1	SHEET 1 OF 1