

## Full Port Brass Ball Valve with Drain, CPVC Connection

# Job Name \_\_\_\_\_\_ Location \_\_\_\_\_ Engineer \_\_\_\_\_ Contractor \_\_\_\_\_ Tag \_\_\_\_\_ PO#\_\_\_\_\_

#### **Specifications**

- Quarter-turn valve with reversible handle
- Forged valve body
- Convenient CPVC socket connection
- Working pressure is 400 PSI CWP
- Working pressure at 180° F is 125 PSI

#### **Applications**

• Potable and non-potable water

#### **Materials**

Brass




Part Code	A	В	C	D	Е	F
B67256	1/2" Female CPVC	4.88"	0.57"	2.48"	3.75"	0.85"
B67257	3/4" Female CPVC	6.32"	0.75"	2.85"	4"	1.13"
B67258	1" Female CPVC	8.05"	1"	3.47"	4.48"	1.46"

### **Certifications/Listings/Approvals**

- IAMPO certified
- Vermont Act 193 compliant
- Lead Law compliant
- IPC and National Plumbing Code of Canada compliant
- NSF/ANSI/CAN 61-2022
- NSF/ANSI 372-2022
- IAPMO/ANSI Z1157

800.355.6637 • jonesstephens.com



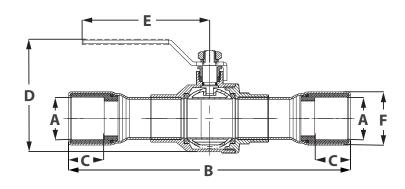

©2025 Jones Stephens 0625