



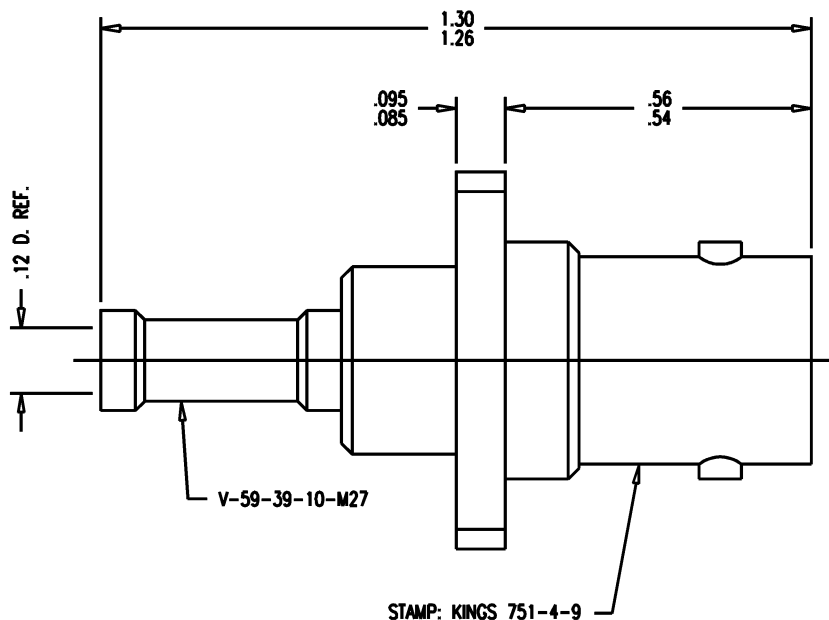

NOTES:

1. FOR USE WITH RAYCHEM 5024A-1314 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-402.
3. FOR CABLE TRIMMING USE KTJ-100 & KTD-145.
4. FOR CRIMPING USE DIE KTH-2081.
5. INTERFACE PER MIL-STD-348, FIG. 301-2.
6. CONTACT M (1-2359-1MA9) TO BE SUPPLIED UNASSEMBLED.
7. MARK PACKAGE: KINGS 751-4-9
XX XX (DATE CODE)
8. MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
CONTACT F: BER. COP., ASTM-B-196
K-GRIP SLEEVE: COMMERCIAL BRONZE TUBE, ALLOY 220
ALL OTHER PARTS: BRASS, ASTM-B16
9. FINISHES:
CONTACT: HARD GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
10. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz

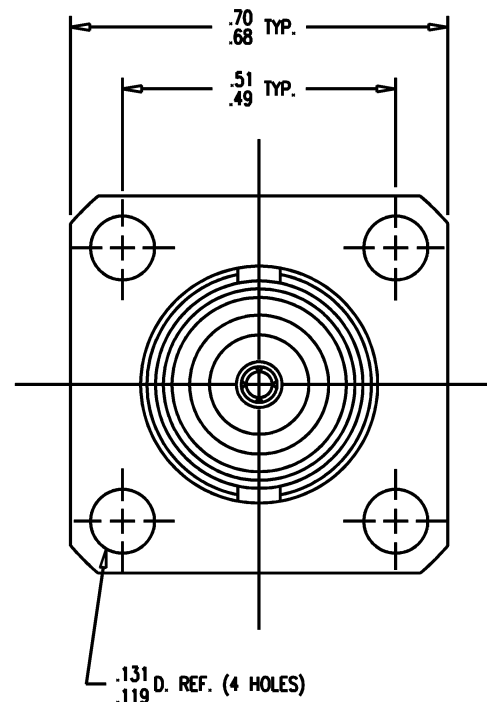

GSD

751-4-9

REVISIONS

ISSUE	CHANGES	
0	ER JCA	34197 10/12/92

JCA2977

SCALE 4:1

APPROX SURFACE AREA

WAS: E-17723

USED ON

REF: BOEING

JACK, PANEL, BNC

DRAWN	JCA	DATE	08/06/92
DESIGN	JT	DATE	08/07/92
APPR.	VLS	DATE	10/21/92

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

751-4-9

GSD