

4-Ch & 8-Ch Advanced Analytics NVR

NVR4 & NVR8




- Supports Ultra 265/H.265/H.264 video formats
- 4/8-channel inputs
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Supports 1-ch HDMI output, 1-ch VGA output
- Up to 4K resolution recording
- 1 SATA HDD up to 6TB
- Supports cloud upgrades

Specifications

	NVR4	NVR8	
Video/Audio Input			
IP Video Input	4-ch	8-ch	
Two-way Audio Input	1-ch, RCA		
Network			
Incoming Bandwidth	64Mbps		
Outgoing Bandwidth	64Mbps		
Remote Users	128		
Protocols	P2P, UPnP, NTP, DHCP, PPPoE		
Video/Audio Output			
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz		
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		

Synchronous Playback	4-ch	8-ch
Corridor Mode Screen	3/4	3/4/5/7/9
Decoding		
Decoding format	Ultra 265/H.265/H.264	
Liveview/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30,8 x 1080p@30, 16 x 720p@30	
Hard Disk		
SATA	1 SATA interface	
Capacity	up to 6TB for each disk	
External Interface		
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel: 1 x USB2.0,1 x USB3.0	
General		
Power Supply	12V DC Power Consumption: ≤8 W (without HDD)	
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)	
Dimensions (W×D×H)	260mm × 240mm × 47mm (10.2"×9.4"×1.9 ")	
Weight (without HDD)	1.3kg (2.87 lb)	

Dimensions

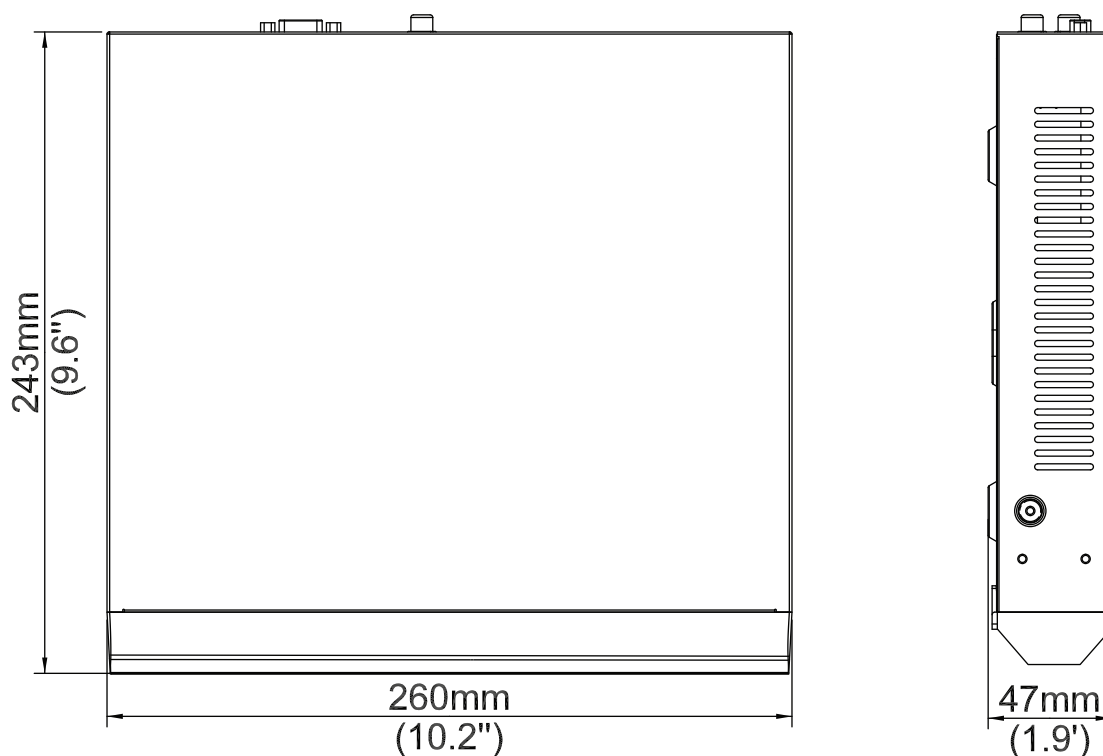

Rear Panel

