

# UNDERCOUNTER REFRIGERATORS

MODEL:  MVR29UHC  MVR48UHC  MVR60UHC  MVR72UHC



MVR29UHC



MVR48UHC



MVR60UHC



MVR72UHC


Maxx Cold V-Series Undercounter Refrigerators are designed for performance – holding your products at their ideal storage conditions. These undercounter refrigerators make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service if properly maintained. The unit's foam insulation and forced air cooling system deliver an outstanding food storage environment.

## FEATURES AND CONSTRUCTION

- Stainless steel exterior and powder coated aluminum interior construction
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans

## ELECTRIC

115V / 60Hz / 1Ph  
 (230V / 50-60Hz / 1Ph is available as an option)  
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

## 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2017 Compliant

## MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797


## NET STORAGE CAPACITY (Cu Ft)

MVR29UHC.....	7.8 Cu Ft (221 L)
MVR48UHC.....	14.1 Cu Ft (399 L)
MVR60UHC.....	18.5 Cu Ft (524 L)
MVR72UHC.....	21.8 Cu Ft (617 L)

## TEMPERATURE

Holding temperature ..... 33°F to 40°F (1°C to 4°C)

- Solid-state controls and forced-air system deliver consistent, easily adjustable temperature performance

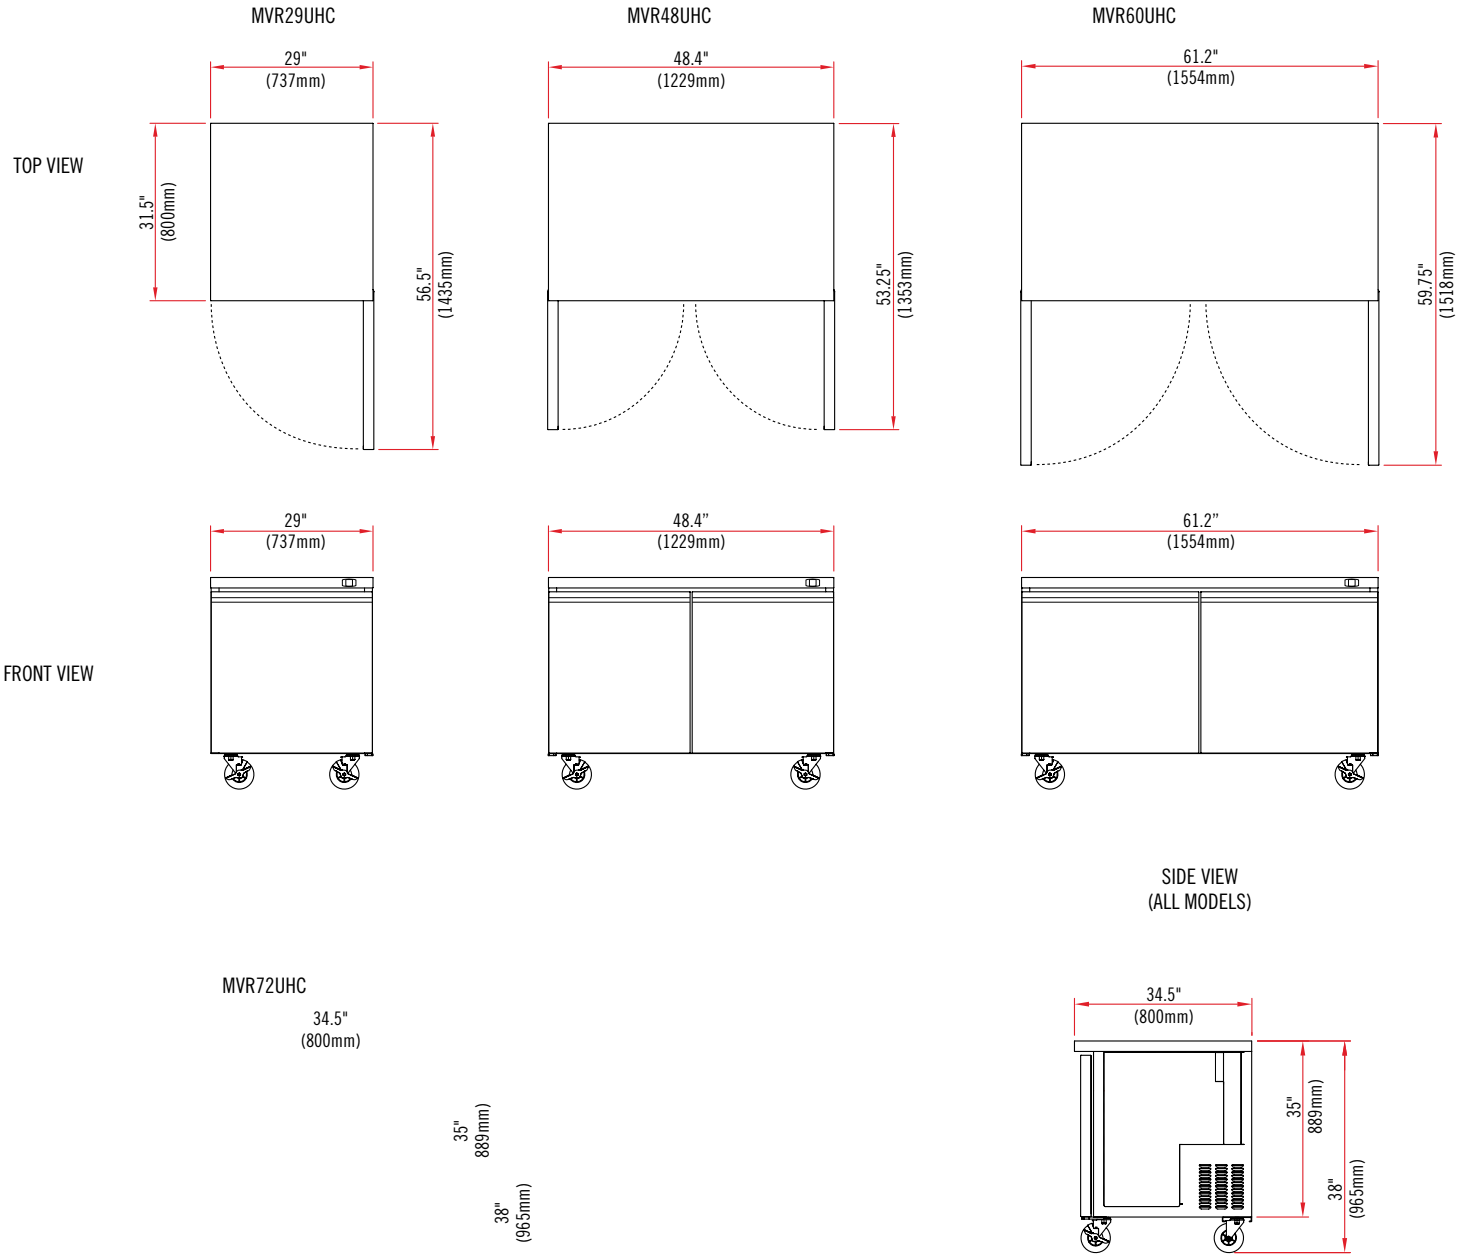

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MVR29UHC	29" x 31.5" x 38" (737 x 800 x 965 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	7.8 Cu Ft (221 L)	33°F to 40°F (1°C to 4°C)	2.5A	132 lbs (60 kg)	R290a 1.23 oz (35 g)	1 / 1	115V / 60Hz / 1Ph
MVR48UHC	48.4" x 31.5" x 38" (1229 x 800 x 965 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	14.1 Cu Ft (399 L)	33°F to 40°F (1°C to 4°C)	3.0A	176 lbs (80 kg)	R-290a 2.12 oz (60 g)	2 / 2	115V / 60Hz / 1Ph
MVR60UHC	61.2" x 31.5" x 38" (1554 x 800 x 965 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	18.5 Cu Ft (524 L)	33°F to 40°F (1°C to 4°C)	3.1A	207 lbs (94 kg)	R-290a 1.94 oz (55 g)	2 / 2	115V / 60Hz / 1Ph
MVR72UHC	72" x 31.5" x 38" (1829 x 800 x 965 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	21.8 Cu Ft (617 L)	33°F to 40°F (1°C to 4°C)	3.9A	247 lbs (112 kg)	R-290a 3.35 oz (95 g)	3 / 3	115V / 60Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements