



This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	07/27/15	AM

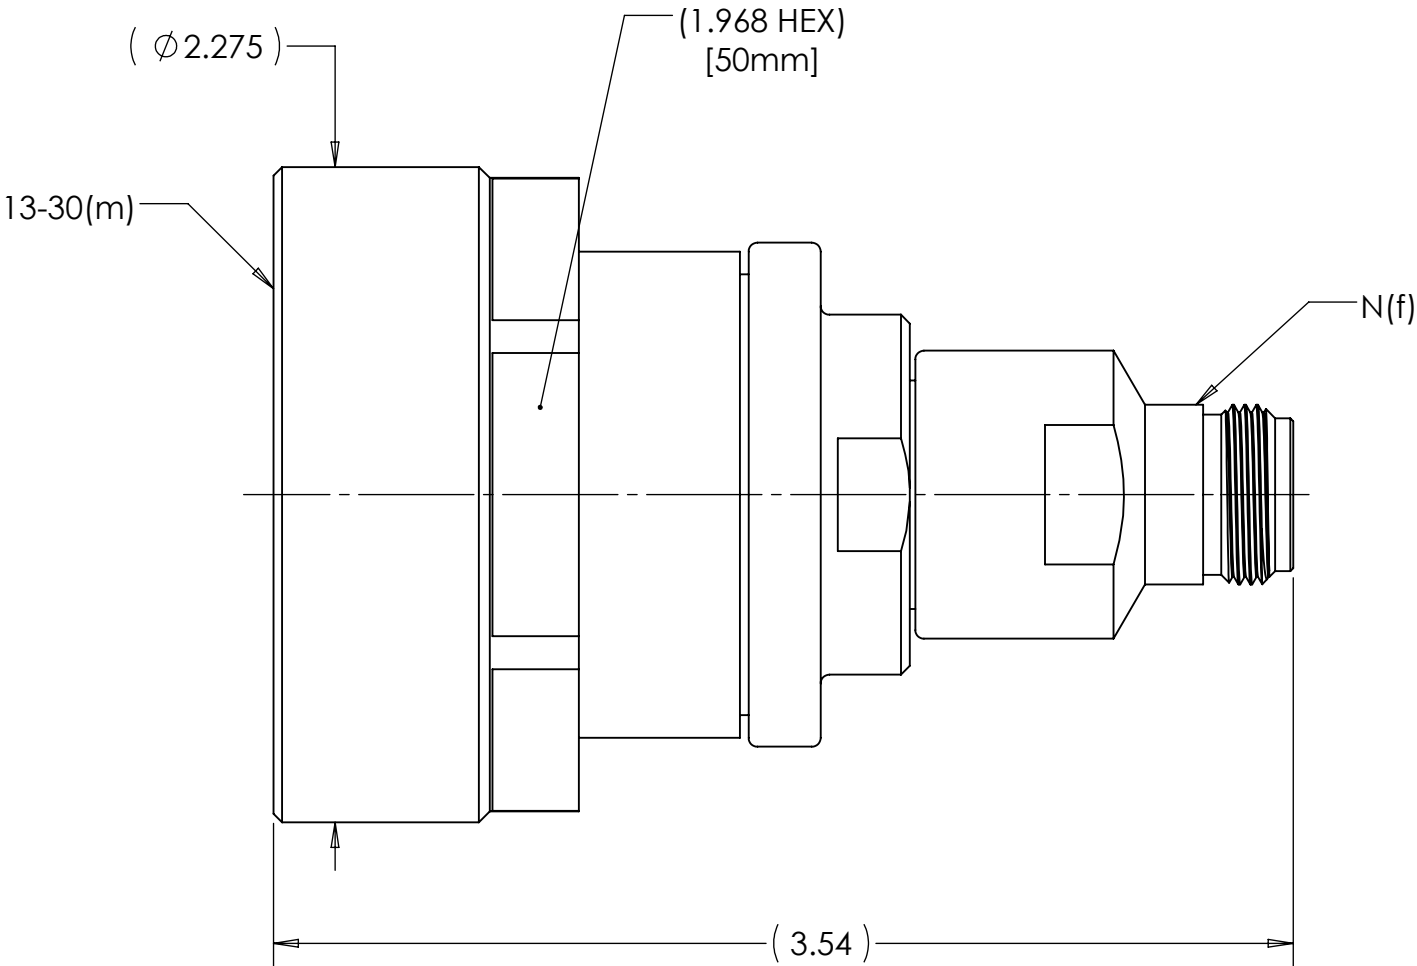

ENGINEERING DATA:

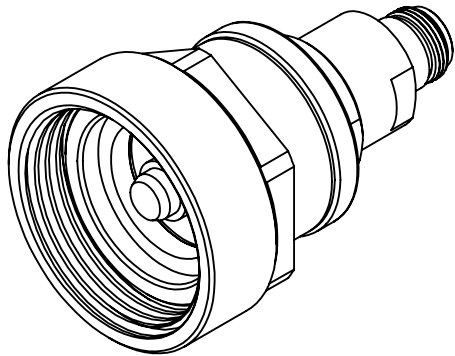


ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: DC to 4GHz

MECHANICAL:
INTERFACE: 13-30 PER IEC 60169-5
N(f) PER MIL-STD-348 FIG. 304.2

MATERIAL:
CENTER CONTACTS: BRASS & BERYLLIUM COPPER
INSULATORS: PTFE
BODIES & COUPLING NUT: BRASS
GASKET: SILICONE RUBBER

FINISH:
CENTER CONTACTS: SILVER PLATED
BODIES & COUPLING NUT: NICKEL PLATED

NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.

MATERIAL		DO NOT SCALE DRAWING	DRAWN AM	DATE 07/24/15	<div> TRU Corporation 245 Lynnfield St, Peabody, MA 01960</div> <div>EXPERIENCE. TRU INNOVATION.</div>		
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. AM	DATE 07/24/15			
			MFG APPR.	DATE			
COMMENTS:		TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES: <div>63/</div>	OTHER APPR.	DATE	TITLE: CONNECTOR, COAXIAL 13-30(m) to N(f) ADAPTER		
		THIRD ANGLE PROJECTION 		SIZE B			
surface area: sq inch		weight: 1.21 lbs	CAGE CODE: 92180			SCALE: 3:2	SHEET 1 OF 1