

4212

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

1. Securing the rod (16) with the canopy onto the bushing of fixture (2).
2. Attach the mounting bracket (3) with box screws (5) to the outlet box (4).
3. Tie the ground wire (8) from fixture and ground wire (6) from outlet box to the ground screw (7) on the mounting bracket (3).
4. Connect the white fixture wire (13) from the fixture to the white wire (neutral wire 12) from the supply circuit. Connect the black fixture wire (11) from the fixture to the black wire (live wire 10) from the supply circuit.
5. Cover the connections by using provided wire connectors (9). Position wires back inside the outlet box (4).
6. Place the canopy (1) over the outlet box (4). Align the mounting screws so that they protrude through the appropriate holes on the canopy (1). Screw the lock nuts (14) onto the mounting screws.
7. Install the two bulbs (not included 15) and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.
8. Turn on the power.

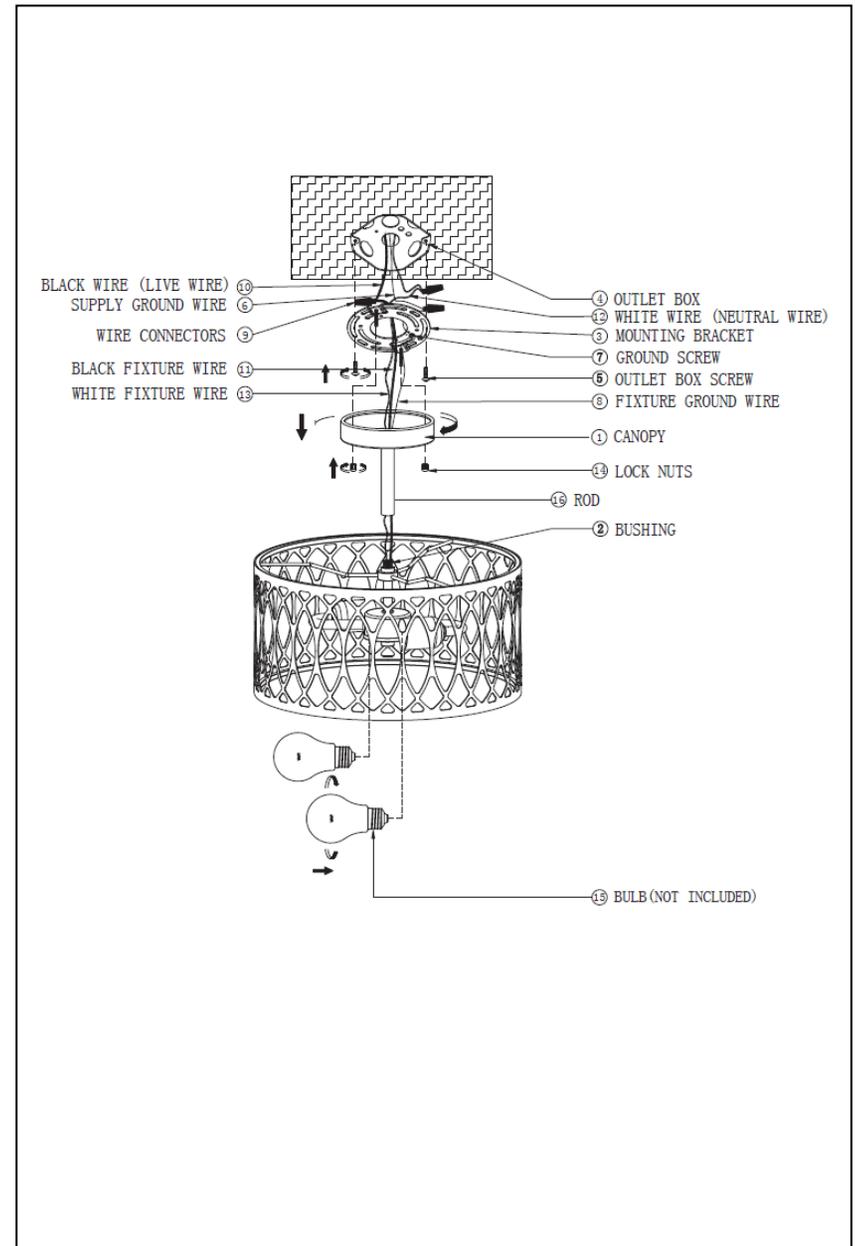

INSTALLATION IS NOW COMPLETED