

# SAVANT

## Micro Aperture-4: Speaker Pair Quick Reference Guide


### Products

Micro Aperture 4: Speaker Pair (round)  
Micro Aperture 4: Speaker Pair (square)

### Box Content

(2) Micro Aperture speaker  
(2) 4" Ceiling Mount (093-3105-00)  
(1) Cutout Template (009-1769-00 or 009-1770-00)  
(1) Product Regulatory Insert (009-1742-00)

### Top Panel

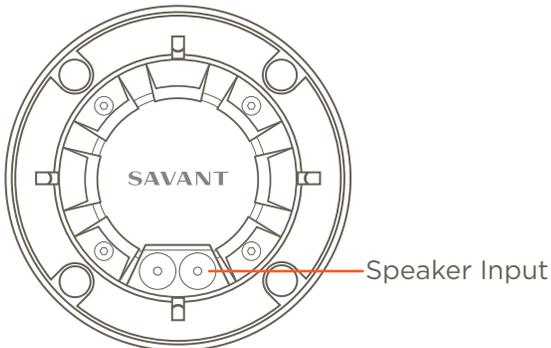


Speaker Input (1) Binding Posts

### Specifications



Environmental	
Temperature	32° to 104° F (0° to 40° C)
Humidity	10% to 90% Relative Humidity (non-condensing)
Dimensions and Weight	
Height	4.65 in (11.80 cm)
Width	4.65 in (11.80 cm)
Depth	4.24 in (10.78 cm)
Weight	Shipping: 5.35 lb (2.42 kg)
Operating Parameters	
Frequency Response	80 Hz - 20 kHz +/- 3 dB
Impedance	4-Ohm nominal
Sensitivity	89 dB SPL (2.83V/1 meter)
Regulatory	
RoHS	Compliant

### Installation

1. Use the cutout template to cut a hole in the ceiling.
2. Insert the Ceiling Mount in the hole.

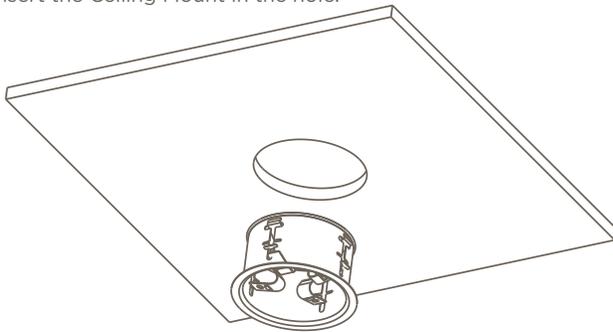

3. Push springs into place.
4. Connect the speaker connection.
5. Insert the speaker into the ceiling mount.

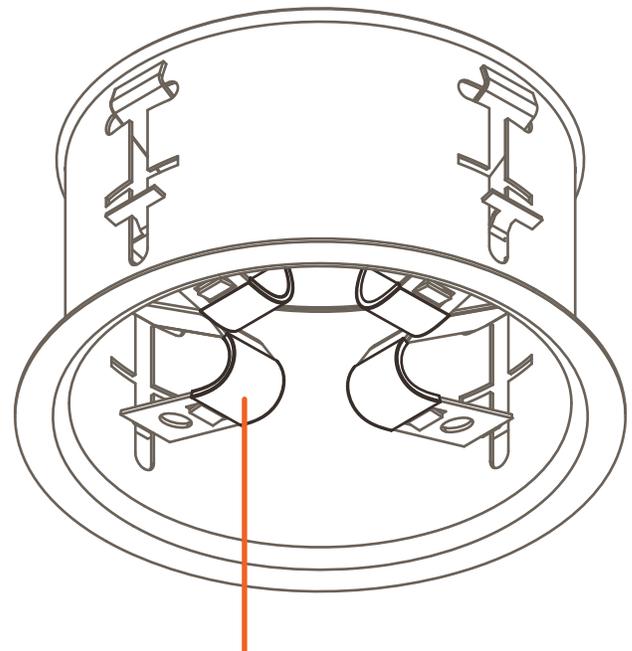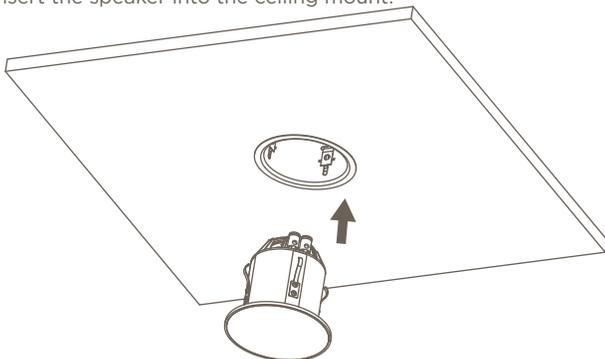

If the ceiling is 5/8" thick or greater remove the rubber friction bands from the springs.

Additionally either the Pre-construction Bracket or the Flush Mount Kit can be used.

- MRS-4-PCB-00
- MRS-4-FMK-00