

# F1960 Poly PEX Swivel Faucet Adapter

# Job Name \_\_\_\_\_\_\_ Location \_\_\_\_\_\_ Engineer \_\_\_\_\_\_ Contractor \_\_\_\_\_\_ Tag \_\_\_\_\_ PO# \_\_\_\_\_

#### **Specifications**

Manufactured to the highest industry standards, Jones Stephens' F1960 cold expansion fittings provide precise, secure, and leak-free connections. Made with strong polymer material, F1960 cold expansion fittings are corrosion and chlorine/chemical resistant – making them a great fit for aggressive water environments. Approved for use with PEX-A piping. Can be used with F1960 PEX rings.

#### **Applications**

Jones Stephens' F1960 Poly PEX Swivel Faucet Adapter is approved for use with commercial and residential non-potable water applications.

#### **Materials**


Polymer construction. Manufactured of premium-grade resin with non-mixed blends.

#### **Certifications/Listings/Approvals**

ASTM F1960-2018a ASTM F877-2020 NSF/ANSI/CAN 61-2022 NSF/ANSI 14-2016a NSF/ANSI/CAN 372-2022 CSA B137.5-2020





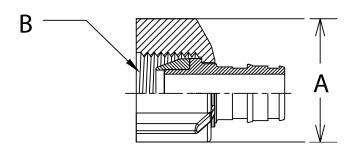

	ID	OD	
F1960 Specified Dimensions	in (mm)	in (mm)	
1/2" End Connection	.40(10.20)	.61(15.59)	
3/4" End Connection	.61(15.60)	.87(22.10)	
1" End Connection	.82(20.80)	1.11(28.10)	
1-1/4" End Connection	.97(24.64)	1.36(35.54)	
1-1/2" End Connection	1.08(27.43)	1.49(37.85)	
2" End Connection	1.48(37.59)	2.08(52.82)	

## **PRODUCT OFFERING ON PAGE 2**

# F1960 Polymer Fittings

Submittal Sheet



### **Dimensions and Product Offering**

PART NO.	SIZE	A - IN (MM)	A TOLERANCE ±IN(MM)	B - IN (MM)	B TOLERANCE ±IN(MM)	WEIGHT - LBS (G)	WEIGHT TOLERANCE ±LBS (G)
F76780	0.50"	1.30 (33.00)	0.36 (9.07)	1/2-14 NPSM	-	0.03 (12.7)	0.02 (10.89)