

LED 5 COMPLETE

5CCT Swivel Undercabinet

This adaptable, adjustable fixture allows for a wide range of illuminated area regardless of installation location. The fixture produces up to 1350 lumens and is field-switchable to five different color temperatures. With a pivot angle of $\pm 32^\circ$ the LED Complete 5 promises ultimate flexibility without compromising performance.

- Field-switchable 5CCT (2700K | 3000K | 3500K | 4000K | 5000K)
- High color rendering index of 90+ CRI
- 120V AC input
- Low power consumption not exceeding 16.5W
- Surface mount ultra-low profile
- 35,000 hour rated life
- cETLus listed for dry locations



LED COMPLETE 5 QUICK SPECS

SERIES	5LCS
INPUT VOLTAGE	120V AC
CCT	5CCT (2700K 3000K 3500K 4000K 5000K)
CRI	90+
WATTAGE	Up to 16.5W
LUMENS	Up to 1050Lm
BEAM ANGLE	120°
DIMMABLE	10-100% TRIAC
MOUNTING	Surface
RATING	cETLus Listed, Dry Locations
RATED LIFE	35,000 hrs

*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.

PROJECT: _____

TYPE: _____



LOCATION: _____

CATALOG NUMBER: _____




LED COMPLETE 5 QUICK DIMENSIONS



1/2" knockouts located on back end underside of fixture, spaced every 4"

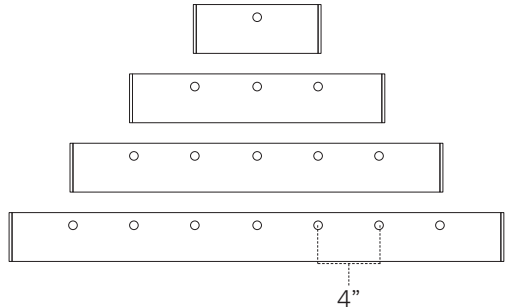


Convenient rear access door



Easy access to wiring compartment

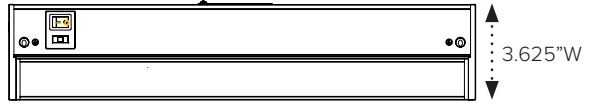

Part Number	L	W	H
5LCS-10-5CCT	10"	3.625"	1"
5LCS-16-5CCT	16"	3.625"	1"
5LCS-24-5CCT	24"	3.625"	1"
5LCS-32-5CCT	32"	3.625"	1"

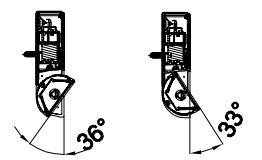


LED 5 COMPLETE ORDERING INFORMATION

ITEM NUMBER	CCT	LENGTH	LUMENS	WATTAGE	VOLTAGE	CRI	BEAM ANGLE	DIMMING
5LCS-10-5CCT-WH	5CCT	10"	385Lm	7W	120V AC	90+	120°	10-100% (TRIAC)
5LCS-10-5CCT-DB	5CCT	10"	385Lm	7W	120V AC	90+	120°	10-100% (TRIAC)
5LCS-16-5CCT-WH	5CCT	16"	620Lm	11W	120V AC	90+	120°	10-100% (TRIAC)
5LCS-16-5CCT-DB	5CCT	16"	620Lm	11W	120V AC	90+	120°	10-100% (TRIAC)
5LCS-24-5CCT-WH	5CCT	24"	925Lm	15W	120V AC	90+	120°	10-100% (TRIAC)
5LCS-24-5CCT-DB	5CCT	24"	925Lm	15W	120V AC	90+	120°	10-100% (TRIAC)
5LCS-32-5CCT-WH	5CCT	32"	1050Lm	16.5W	120V AC	90+	120°	10-100% (TRIAC)
5LCS-32-5CCT-DB	5CCT	32"	1050Lm	16.5W	120V AC	90+	120°	10-100% (TRIAC)

5LCS FIXTURES INCLUDE: (1) 3/8" Clamp connector, (1) Inline/direct connector, (2) Captive mounting screws

LED 5 COMPLETE ACCESSORIES

ITEM NUMBER	DESCRIPTION
5LCS-PC6-BK	6' Power Cable with 120V AC plug, Black Finish
5LCS-PC6-WH	6' Power Cable with 120V AC plug, White Finish
5LCS-EX6-BK	6" Linking Cable, Black Finish
5LCS-EX6-WH	6" Linking Cable, White Finish
5LCS-EX12-BK	12" Linking Cable, Black Finish
5LCS-EX12-WH	12" Linking Cable, White Finish
5LCS-BOX-DB	Hardwire Box with Power Connection Ports, Dark Bronze
5LCS-BOX-WH	Hardwire Box with Power Connection Ports, White Finish
5LCS-CON-DB	Replacement in-line connector, Dark Bronze Finish
5LCS-CON-WH	Replacement in-line connector, White Finish

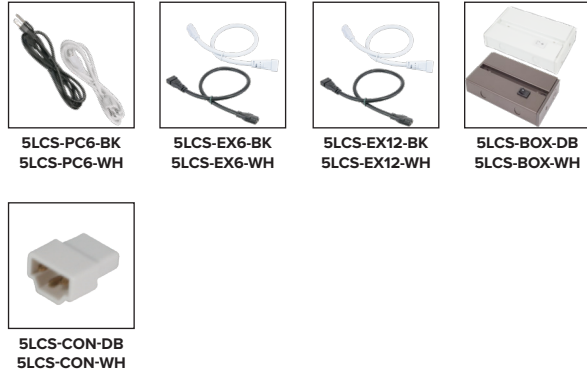

LED 5 COMPLETE POWER ACCESSORIES DETAILED INFORMATION


ITEM NUMBER	LENGTH	FINISH	APPLICATION	VOLTAGE	WATTAGE	LISTING	DIMENSIONS
ALC-BOX-DB	Hardwire box with male/female Molex connections, end power connection ports, (6) 3/8" knockouts, and On/Off rocker switch	Dark Bronze	Dry Location	120V AC	150W X 2	cETLus	7-3/8"L x 2-1/8"W x 1"H
ALC-BOX-WH		White	Dry Location	120V AC	150W X 2	cETLus	7-3/8"L x 2-1/8"W x 1"H
ALC-PC6-BK	6ft power cord with 3-prong grounded plug and Molex connector	Black	Dry Location	120V AC	150W	cETLus	6ft
ALC-PC6-WH		White	Dry Location	120V AC	150W	cETLus	6ft

LED 5 COMPLETE RECOMMENDED DIMMERS

BRAND	MODEL #	MAX CURRENT OUT (MA)	MIN CURRENT IN (MA)	DIMMING RANGE (%)
Lutron	CTCL-153P	53.00	0.00	0-98
Lutron	DVCL-153P	54.00	1.00	2-98
Lutron	CTCL-153PDH-WH	53.00	0.00	0-98

Dimmer performance may vary in field application due to unknown external factors. Dimmers not included on the chart above are not necessarily incompatible; they have yet to be fully evaluated. Please reference dimmer manufacturer's instructions for detailed information regarding performance and compatibility. Test data listed above is based on single lamp data. Recommended maximum 10 units connected to a single dimmer.

LED 5 COMPLETE PHOTOMETRICS

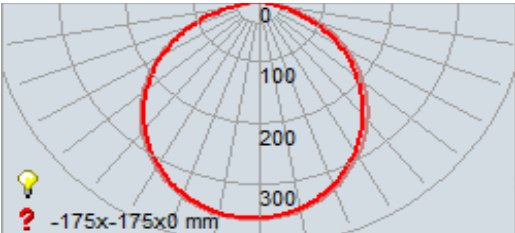

Model #	Amperage	Wattage
5LCS-10	0.065	7
5LCS-16	0.105	11
5LCS-24	0.135	15
5LCS-32	0.155	16.5