

Neo™ Shower Combination

MODELS:

- SM-1430-P: with S-1557 tub spout
- SM-1410-P: without S-1557 tub spout

FEATURES:

- Neo Shower Head S-3010
- Neo Arm and Flange S-2540
- Neo Pressure Balance Valve and Trim SM-1400-P
- Neo Tub Spout S-1557
- 2.5 gpm (9.5 L/min) flow rate

OPTIONS:

- E2: 2.0 gpm (7.6 L/min) flow rate shower head
- E175: 1.75 gpm (6.6 L/min) flow rate shower head

STOCK FINISH:



PC BN

STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

- Limited Lifetime Warranty (shower head consumer use)
- 1 Year Limited




Information continues on next page

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-MAY 2022

Neo™ Shower Combination

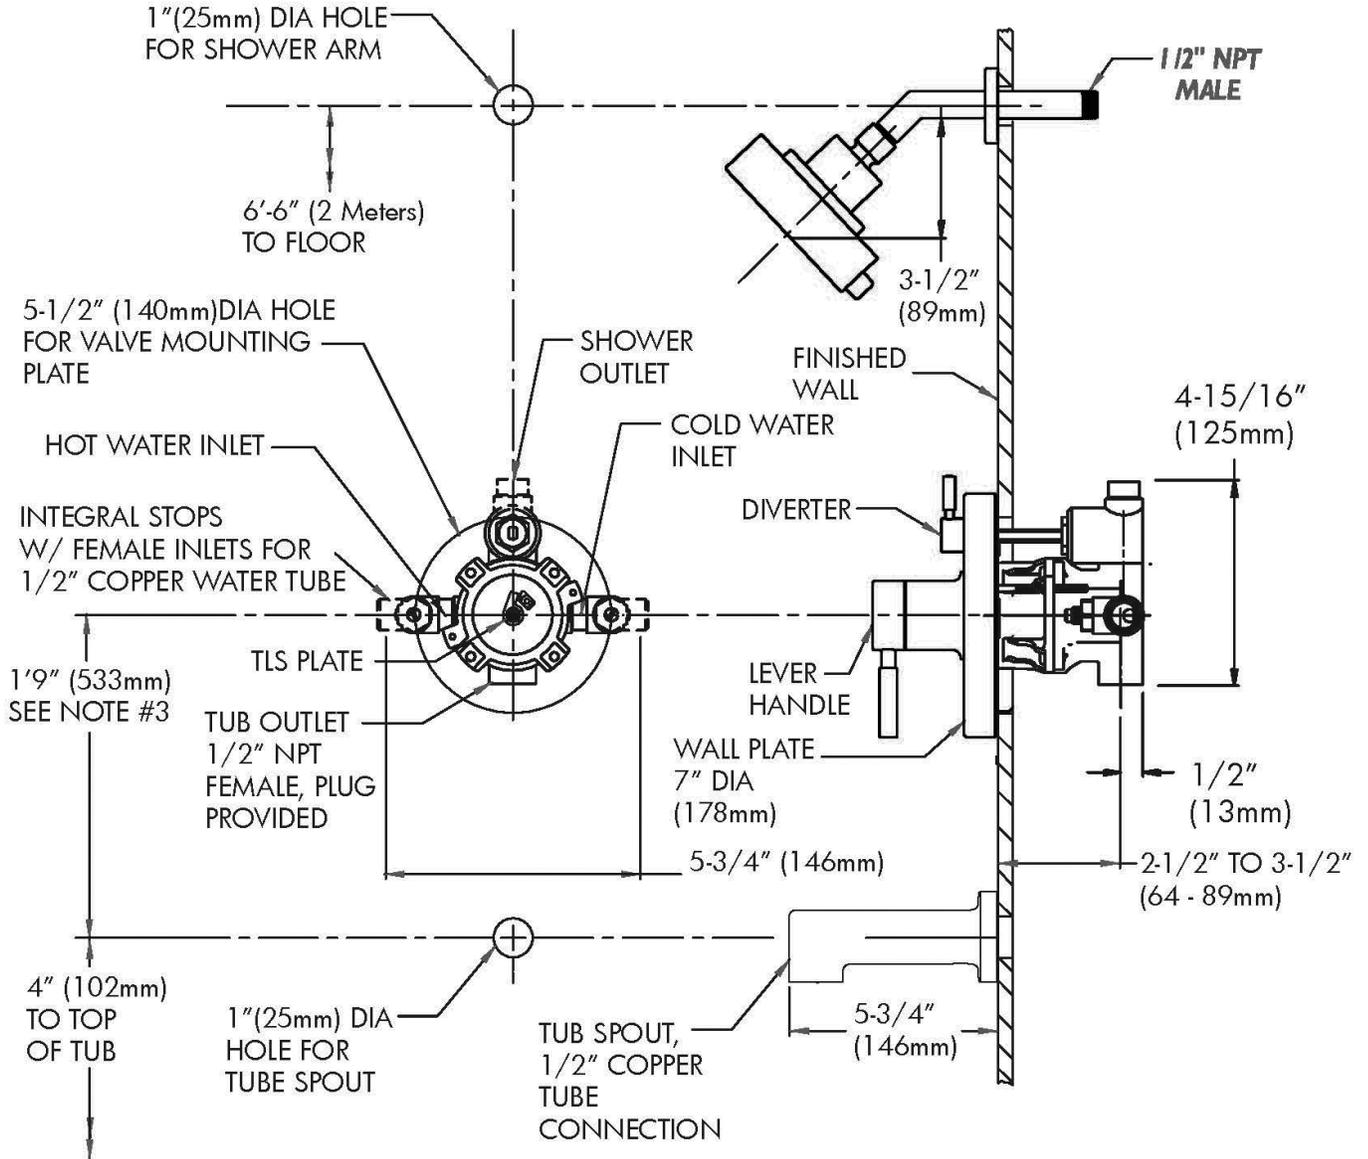

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: