VP6030CTS

60 x 30 x 76



VERITEK PRO

Lightweight and durable, Veritek Pro is produced with Swan Solid Surface, a proprietary SMC compound.

Veritek Pro is the better bathroom solution and is a snap to install!

Available in the Following Offerings:

| | | Height | Height | Model Number | | | |
|-------|----------------------|--------|--------|--------------|---------------|---------------|----------------|
| Depth | Depth Width Standard | | AFR | Standard | AIP | AFR | AIP & AFR |
| 30 | 60 | 76 | 79 | VP6030CTSL/R | VP6030CTSAL/R | VP6030CTSML/R | VP6030CTSMAL/R |

- Standard: Base model shower, tub, or tub shower offering
- Aging In Place (AIP): Reinforced shower or tub shower walls that allows for future grab bar installation
- Above Floor Rough (AFR): Clearance for drain placement, eliminating the need for drain relocation
- Aging In Place (AIP) & Above Floor Rough (AFR): A combination kit for AFR & AIP

PROFESSIONAL

INCHES

FEATURES

- Modern, matte finish
- Smooth, 4-piece kit
- Easy Wedge & Lock installation
- Caulkless installation
- Integral soap shelves
- Available in White only
- 15 Year residential limited warranty

COMPONENTS OF KIT

Standard

- VP6030CTL (Tub) or VP6030CTR (Tub)
- VP6062CBW (Back Wall)
- VP2462CSW (Side Walls)

Aging In Place (AIP)

- VP6030CTL (Tub) or VP6030CTR (Tub)
- VP6062CBWA (Back Wall)
- VP2462CSWA (Side Walls)

PACKAGED DIMENSIONS

- Tub: $62\frac{1}{2} \times 34 \times 17\frac{3}{4}$
- Back Wall: 65 x 61 1/2 x 8 1/2
- Side Wall Set: 64 x 26 1/2 x 5 1/4










VP6030CTS

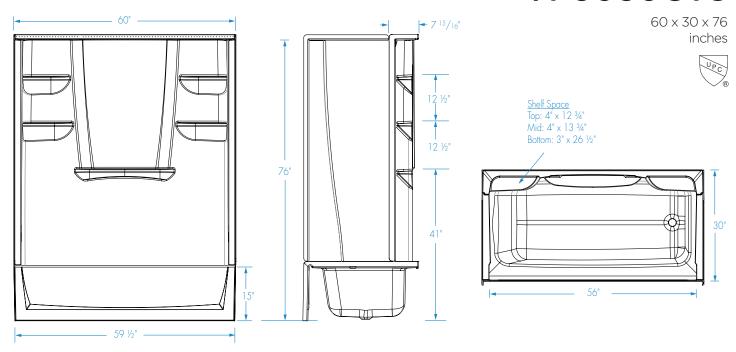

FEATURES Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

| Туре | Model # | Material | Height | Drain | Net Wt. lbs | Pkg. Wt. lbs |
|---------------------|---------------|--------------------|--------|----------|----------------|-----------------|
| Standard Tub-Shower | VP6030CTSL/R | Swan Solid Surface | 76 | LH or RH | 130 | 145 |
| AIP Tub-Shower | VP6030CTSAL/R | Swan Solid Surface | 76 | LH or RH | 160 | 175 |

DIMENSIONS

| Specifications | inches |
|---------------------------------|-------------|
| Width: Overall / Net | 60 |
| Depth: Overall / Net | 31 1/4 / 30 |
| Height: Overall / Net | 77 ³/8 / 76 |
| Enclosure Opening | 56 |
| Skirt Height | 15 |
| Drain Rough-In (from Back Wall) | 14 1/4 |
| Drain Rough-In (from Side Wall) | 2 7/8 |
| Drain: Diameter / Clearance | 2 / 1/2 |

FRAMING DIMENSIONS inches

| Туре | D Depth | W Width | H Height | А | В | С |
|--------|-------------------|-------------------|--------------------|---------|----------|--------|
| Alcove | 31 1/4 | 60 | 77 ³ /8 | Box Out | 2 7/8 | 14 1/4 |
| | | | | C A | B | |

SUMP DATA

| Top of Drain to | Capacity | WIDTH @ centerline | | DEPTH @ centerline | |
|--------------------|--------------------|--------------------|-------------|--------------------|--------|
| Bottom of Overflow | to Overflow gal | Тор | Bottom | Тор | Bottom |
| 9 7/8 | 37 | 51 ½ | 45 ½ | 22 1/4 | 20 1/2 |

Rev. 03.07.22

