
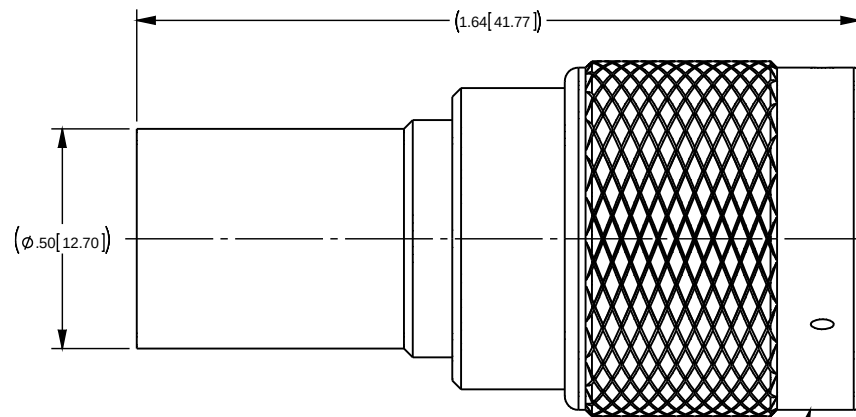



NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR USE WITH RG-393/U CABLE.
2. FOR CABLING INSTRUCTION, SEE CP-5402.
3. FOR CABLE CRIMPING, USE DIE KTH-2105.
4. FOR CABLE TRIMMING, USE KTJ-150 AND KTD-138.
5. INTERFACE PER MIL-STD-348, SERIES N, PIN CONTACT.
6. MATERIALS:
INSULATOR: PTFE PER ASTM D-4894
GASKET: SILICON RUBBER PER A-A-59588
OUTER CONTACT AND C-RING: PHOS. BRONZE PER ASTM B-103
ALL OTHER METAL PARTS: BRASS PER ASTM B16
7. FINISHES:
CENTER CONTACT: GOLD PER ASTM B488
OUTER CONTACT: SILVER PER ASTM B-700
ALL OTHER METAL PARTS: NICKEL PER AMS-QQ-N-290
8. CONTACT AND FERRULE SUPPLIED UNASSEMBLED.

REV	DESCRIPTION	BY	DATE	APPD
E	ER051517	KPS	01/22/14	DCAM



MARK: KINGS KN-59-329 M06 (DATE CODE)

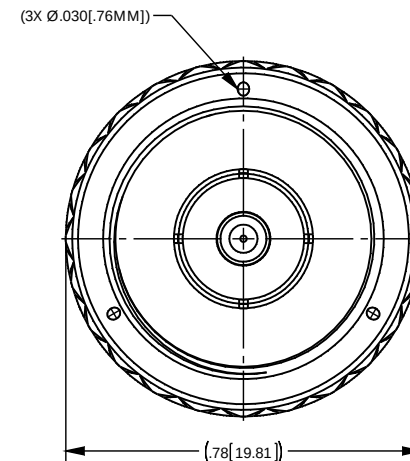

CATALOG P/N: KN-59-329 M06

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMAL: .XX [XX] ± .01 [0.3]
XXX [XXX] ± .005 [0.13]
XXXX [XXXX] ± .000X
ANGLES: ± 2° SCALE: 3:1

KINGS
by WINCHESTER
ELECTRONICS

Winchester Electronics Corporation
159 Park Road Ext Suite 104
Middlebury, Connecticut 06762

CUSTOMER
SALES DRAWING



N PLUG
(RoHS COMPLIANT)

DRAWN	DATE	APPROVED	DATE
PAS	08/01/80	SG	08/11/80
APPROVED	DATE	APPROVED	DATE
XXX	XX/XX/XX	XXX	XX/XX/XX

A	SDKN-59-329 M06	SHT	OF	REV
		1	1	E