## 7601 7661 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date.

## **CAUTION**

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

## **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

## ASSEMBLY AND INSTALLATION

- 1. Secure mounting mounting bracket (6) to the outlet box (1) using box screws (7).
- 2. Pull out the outlet wire and ground wire from the outlet box

Make wire connections with wire nut (8).

- --Ribbed wire (w/o marking) or white wire from light to White wire (2) from power source.
- --Smooth wire (w marking) or black wire from light to Black wire (3) from power source.
- --Attach the ground wire (4) to mounting bracket (6) with a ground screw (5).
- 3. Place the fixture's backplate over mounting bracket (6) and secure with mounting screws (9).
- 4. Select color temperature through CCT switch (10). There are three optional color temperatures
- 3000K, 4000K and 5000K.
- 5. Turn on power.

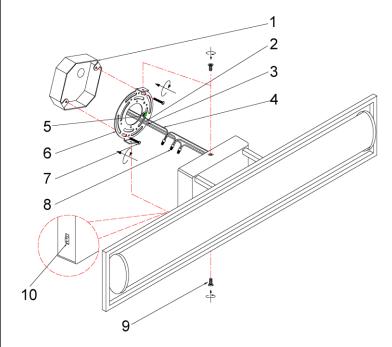

- 1. OUTLET BOX
- 2. WHITE WIRE
- 3. BLACK WIRE
- 4. GROUND WIRE
- 5. GROUND SCREW
- 6. MOUNTING BRACKET
- 7. BOX SCREW
- 8. WIRE NUT
- 9. MOUNTING SCREW
- 10. CCT SWITCH

**INSTALLATION IS NOW COMPLETED**