



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

GLASS DOOR INDOOR BEVERAGE CENTER

MODEL: MCBC3U



MCBC3U


Perfect for any indoor entertainment space, the glass door beverage center can be installed freestanding or built into cabinetry with a storage capacity of up to 3 cubic ft. The compact refrigerator features a multi-pane glass door to regulate temperature and the interior features an energy efficient LED interior light to illuminate and easily identify beverages and refrigerator contents. The design features four sleek sturdy wire shelves, four adjustable leveling feet and an electronic control panel with LCD digital display.

FEATURES AND CONSTRUCTION

- Exterior finish is available in black painted steel
- Easy to clean, low-maintenance ABS interior
- Multi-pane, energy efficient glass door with stainless steel handle
- Energy efficient interior LED lighting - ability to toggle between white and blue light
- 4 metallic wire shelves
- Adjustable leveling feet
- Electronic control panel with LCD digital display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Polyurethane foam insulation provides outstanding thermal regulation and energy efficiency
- Approved for residential & commercial applications

ELECTRIC

115V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 12



Intertek

Certified to ANSI UL 563



DOE 2018 Compliant

MAXX ICE WARRANTY (USA / CANADA)

Contact Maxx Ice for warranty statement at
TechnicalServices@TheLegacyCompanies.com or 877.368.2797


TEMPERATURE

Holding temperature 35°F to 40°F (1°C to 5°C)


- Digital control system maintains optimum temperature
- This unit is designed to store pre-chilled product at the ideal serving temperature and is not intended to perform as a pull down refrigerator




FRONT VIEW

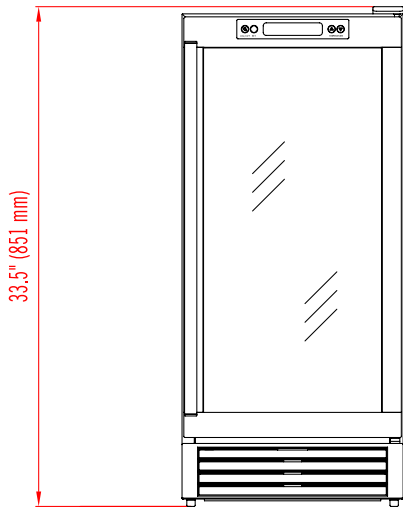

SIDE VIEW

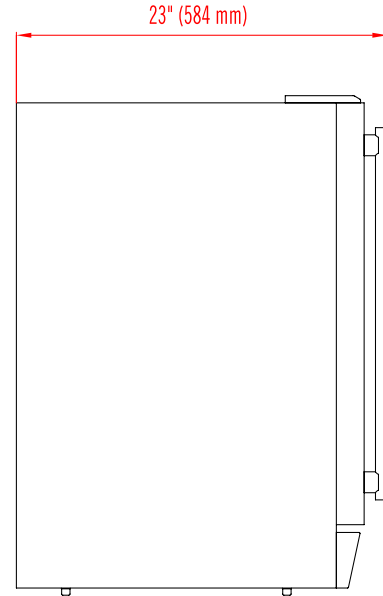

TOP VIEW

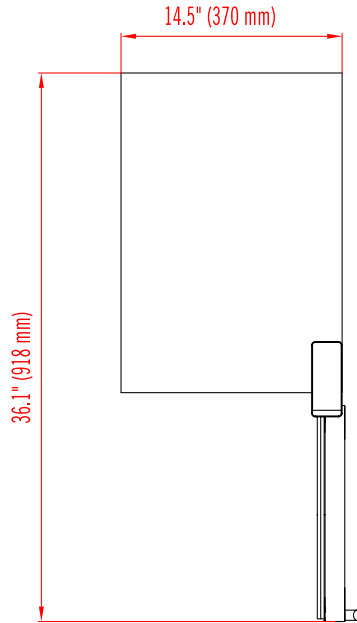

MODEL	EXTERNAL DIMENSIONS	HOLDING TEMPERATURE RANGE	AMP DRAW	DOORS / SHELVES	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
MCBC3U	14.5" x 23" x 33.5" (368 x 584 x 851 mm)	35°F to 40°F (1°C to 5°C)	2.0A	1 / 4	77 lbs (35 kg)	R-134a 2.3 oz (65.2 g)	115V / 60Hz / 1Ph

INSTALLATION

- A minimum clearance of 1/4" on the sides, 1/2" in the rear and 1" on top is recommended to promote adequate cooling air circulation
- Minimum cutout size for undercounter installation is 15" x 33.75"