


# Commercial Toilet

## **INSTALLATION INSTRUCTIONS**



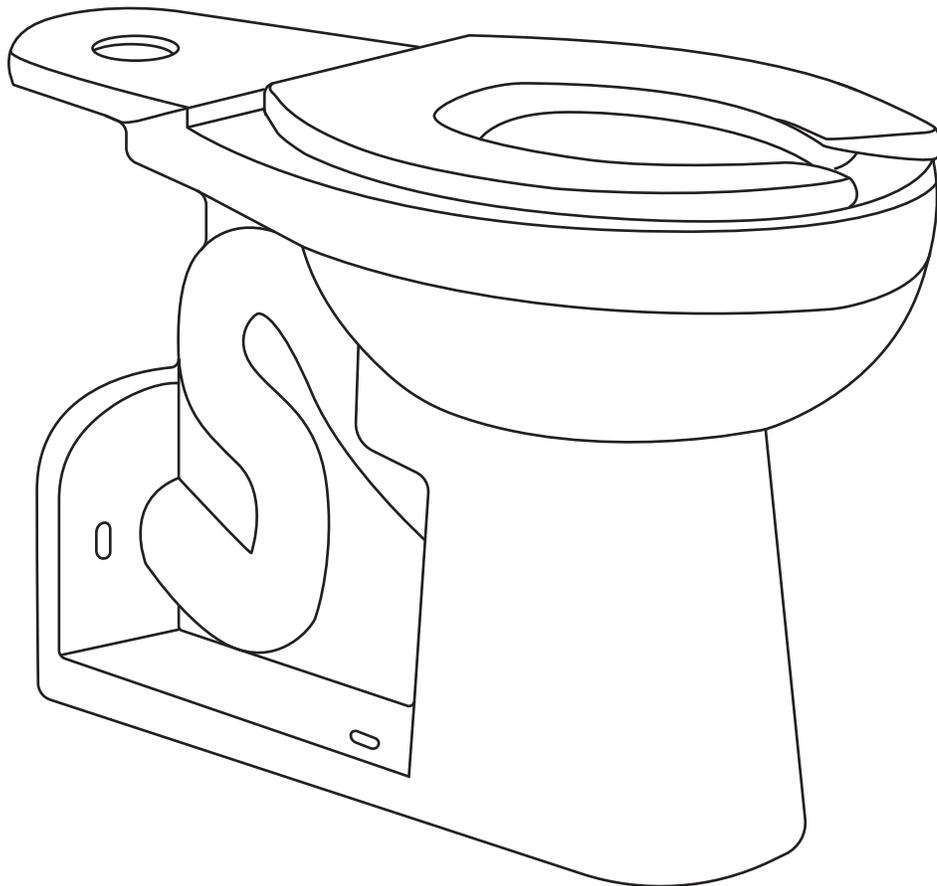

### PRIOR TO INSTALLATION:

- Inspect toilet to ensure no damages have occurred while in shipping.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- All dimensions are nominal! Be sure to measure your toilet prior to installation.
- The step-by-step guidelines in the installation instructions are a general reference. Should there be any discrepancies, Carlton cannot be held liable. It is recommended to install all Carlton products by hiring a licensed professional.
- Read installation and maintenance instructions thoroughly before installing. Be sure to use proper tools and always wear proper personal safety accessories for your protection.
- Two people are recommended to handle and install this product as it is fragile.

If you have any questions or concerns please contact us:  
[info@carltonplumbing.com](mailto:info@carltonplumbing.com)

### SUGGESTED TOOLS & MATERIALS:



Marker




Flexible  
Supply Tube



Wrench



Tape  
Measure



Level



Drill



Outlet  
Gasket Seal



Screwdriver



No-Hub  
Waste System


### INCLUDED PARTS:



Commercial  
Toilet




Toilet  
Seat



Mounting  
Bolts



Cover Caps

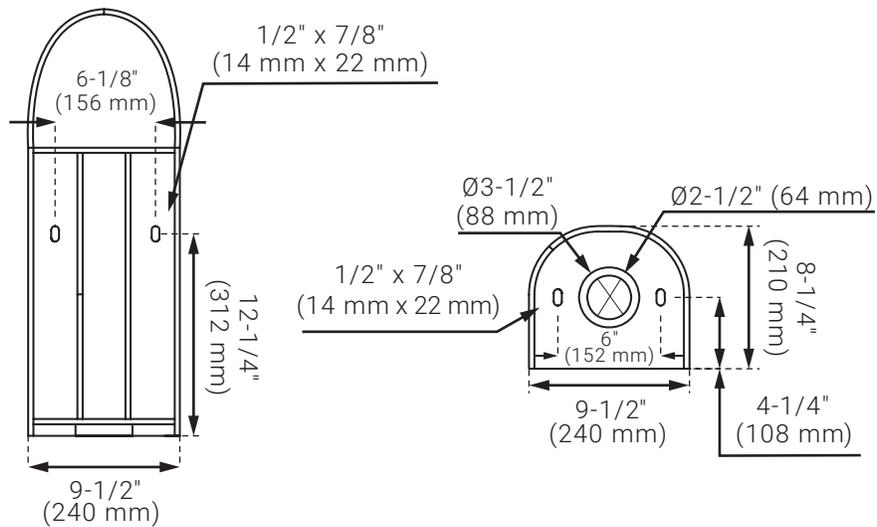


**Dimensions (Nominal):** The distance from the floor to the bowl flange or if using a no-hub waste system (Zurn Z1214 or equivalent), the centerline rough-in must be set at 4-1/4" (108 mm).

## INSTALLATION


### 1. INSTALLING THE FLANGE

- Install the closet bolts into the flange channel and turn 90 degrees, then slide into place in the flange locations to align with the centerline of the flange.
- Space bolts 6" (152 mm) apart. (Use putty to hold the bolts in location for installing the bowl.)
- Dry fit the bowl to the flange and mark the location of the two anchor holes in the floor, remove bowl and drill the pilot holes and insert the floor anchors for bowl attachment to the floor.

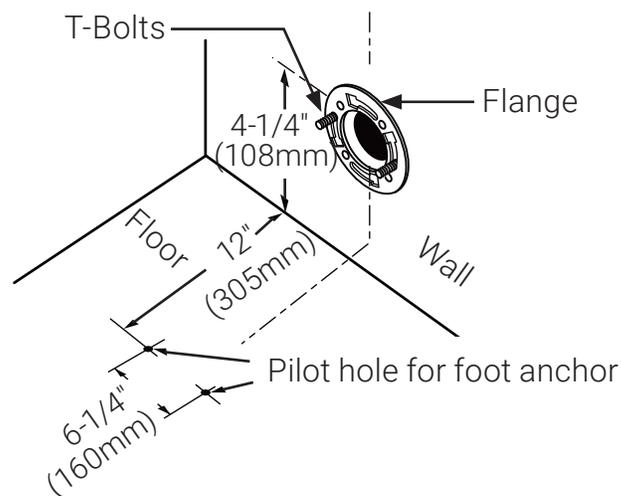

## 2. INSTALLING OUTLET GASKET SEAL


- Fit the outlet gasket seal to the back of the bowl and around the horn of the outlet.
- **NOTE:** Neoprene or graphite felt seal is recommended. Wax seal is not recommended for this application.
- Apply a bead of caulking sealant around the fit area of the back of the bowl.
- **NOTE:** Remove any plugs that may be in the outlet for sewer gas before proceeding to the next step.

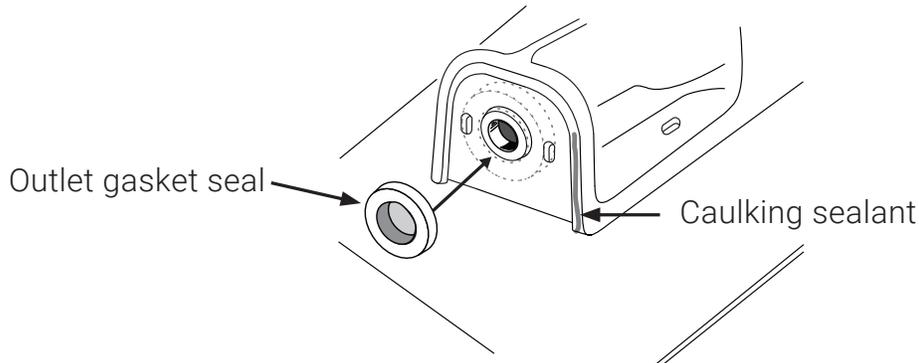

## 3. INSTALLING THE BOWL


### Install the Bowl

- Install the bowl to the flange bolts or waste system attachments so the bolts protrude through the mounting holes at the back of the toilet.

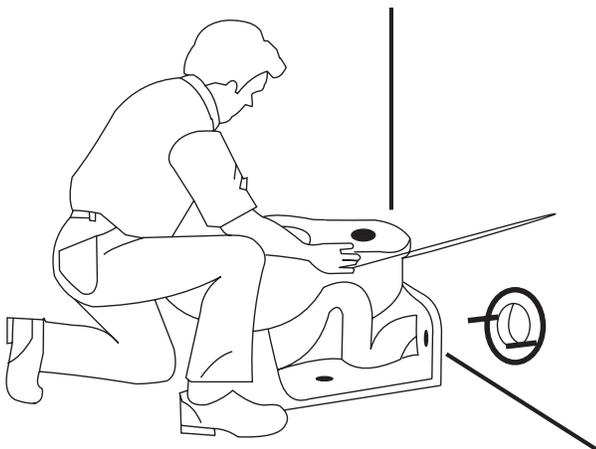


### Attaching the Bowl

- Place the bolt cap snap washers (marked side "UP") to the T-bolt or waste system attachment bolts, then loosely attach the nuts on both sides of the outlet on the back of the bowl.
- Place the bolt cap snap washers (marked side "UP") on the two floor anchor bolts, align the bolts to the floor anchors and loosely tighten.

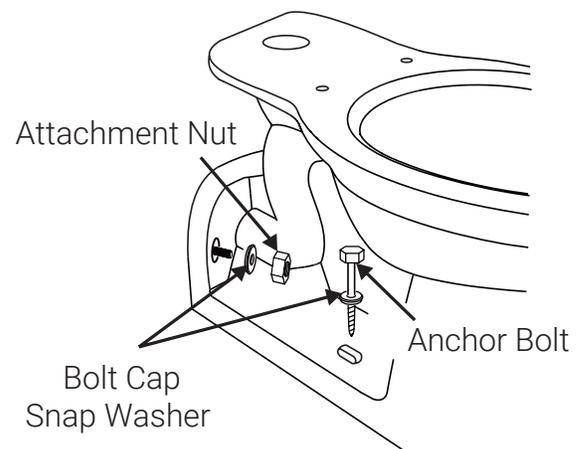

### Final Setting the Toilet and Final Attachment

- Position the toilet squarely to the wall and with a rocking motion, set (push) the bowl against the wall snugly. Alternately turn the nuts and anchor bolts until the toilet is firmly anchored to the wall and floor.
- Snap bolt caps into place over the two anchor bolt heads and the two attachment nuts.

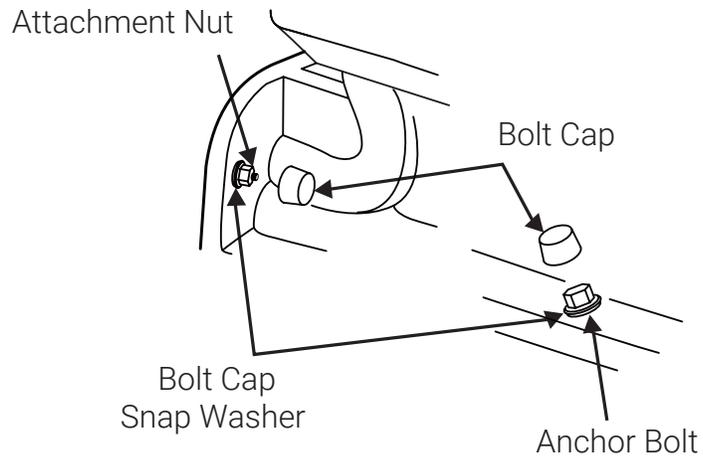



## ONE YEAR LIMITED WARRANTY

Carlton products are made with quality materials and excellent craftsmanship to provide our customers with beautiful, durable, long-lasting products. Should there be any defects in materials or craftsmanship under regular use that are discovered within the first year of installation, Carlton will provide replacement parts at no charge, or at its discretion, replace any product or part of the product that is deemed defective, under normal installation, use, service or maintenance. This warranty applies only to the original purchaser. Proof of purchase will be required in the instance of a claim.

Carlton recommends all installations of Carlton products to be conducted by a licensed, professional plumber or contractor. Carlton will not be held responsible for any damage or product failure due to improper installation, misuse, or failure to utilize a licensed professional for installation. Carlton is not responsible for any installation or removal costs.

### **This One Year Limited Warranty Will Be Voided If:**

- The installation recommendations were not followed by the installer
- The product has been moved from its initial place of installation
- The product has in any way been modified from its packaged state
- The product has been subjected to improper maintenance, abuse, misuse, excessive use of chemicals, accidents, or other damages, etc.

Carlton makes no implication that its products comply with any local building or plumbing codes. It is the consumer's responsibility and obligation to determine local code compliance prior to and during installation. This warranty extends only to the original purchaser and first consumer.

Carlton is not responsible for any special, incidental or consequential damages associated with the installation, replacement, return or use of the original purchaser's product. This includes, but is not limited to: freight costs, labor, travel time, lost profit, home damages and other contingent liabilities and costs (including, without limitation, costs associated with 'professionals' or 'experts', investigations, audits, analyses, attorneys and any other professional/hired services).

The Carlton warranty is a comprehensive and explicit limit of liability. All items not disclosed within the warranty are not addressable within the responsibility of Carlton. Certain states have variances regarding implied warranties; in those situations, we remain fully compliant.

**If you have any questions or concerns, please contact us at  
[info@carltonplumbing.com](mailto:info@carltonplumbing.com)**

 **WARNING:** Contents of your order may contain sharp and possibly other harmful pieces and may cause hazard to children and adults. Carlton is not responsible in any way for personal damages.