




Display Freezer

User's Manual

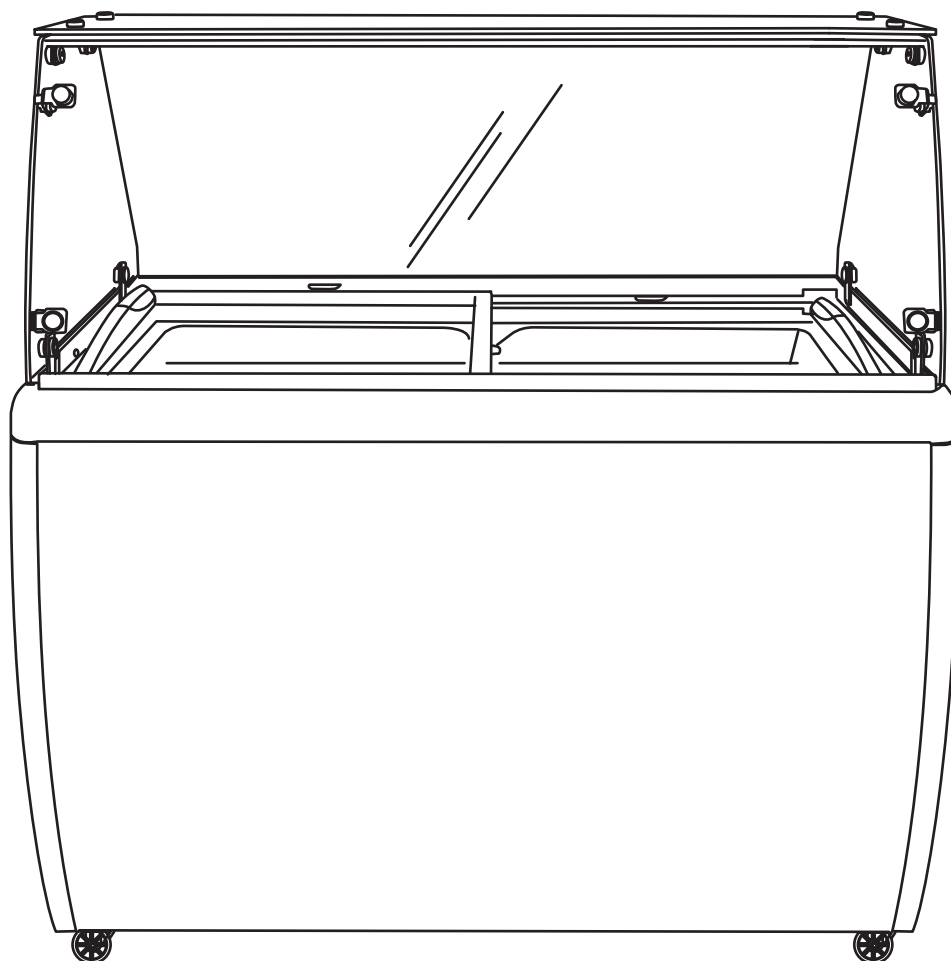

Model: NPDC49W

READ THIS MANUAL CAREFULLY BEFORE USING YOUR DISPLAY FREEZER AND KEEP IT FOR FUTURE REFERENCE.

NORPOLE

PRODUCT REGISTRATION

Thank you for purchasing a Norpole Commercial product. The first step to protect your new product is to complete the product registration on our website: <https://mcappliance.com/product-registration>. The benefits of registering your product include the following:

1. Registering your product will allow us to contact you regarding a safety notification or product update.
2. Registering your product will allow for more efficient warranty service processing when warranty service is required.
3. Registering your product could act as your proof of purchase in the event of insurance loss.

Once again, thank you for purchasing a Norpole Commercial product.

TABLE OF CONTENTS

REGISTRATION 2

IMPORTANT INFORMATION 4

IMPORANT SAFETY INSTRUCTIONS 5

FOOD STORAGE 6

MAINTENANCE 6

TROUBLESHOOTING 7

WARRANTY 8

Thank you very much for purchasing our products. In order to ensure your safety and get the most out of the freezer, please read all instructions carefully.

IMPORTANT INFORMATION

1. Unpack all packages before using the showcase. DO NOT tip the unit more than 45° while moving it.
2. The showcase should be installed in a cool, dry area with good ventilation away from corrosive liquids or gases. It should not be installed close to any source of heat or in direct sunlight. Be sure to allow at least 4 in. (10 cm) at both the front and back of the unit. When installing, be sure to make sure the wheels are level and stable to prevent vibration and excessive noise.
3. For initial operation, run the refrigerator empty for about one hour before storing food in it.
4. Before placing food into the freezer, adjust the temperature control to the lowest point (highest number) and let it run until the temperature of inner cabinet reaches 0° F. Allow 12 hours for the internal temperature to stabilize after food is put in the unit, then adjust the temperature control to the normal desired setting.
5. The thermostat is used to adjust the temperature inside the showcase. Turn the knob in clockwise to higher settings to lower the temperature. Generally, a setting of '4' or '5' is suitable for most applications. The '0' position will turn the unit off. The 'Max' position will make the unit operate continually.
6. Never store flammable, explosive, or corrosive products in the freezer, and keep the freezer away from such materials.
7. If power is cut off, wait at least 5 minutes before turning on again to avoid damage to the compressor.
8. To save energy, the door should not be frequently opened for left open for extended periods.
9. The surface and the inside of the showcase should be kept dry and clean. Long term moisture can cause the showcase rust over time, and may cause stains on the surface.
10. Be sure to periodically clean the appliance. Generally, at least once every 30-45 days is recommended. Clean the interior and exterior of the unit with a neutral soap or detergent and wipe down with a soft cloth.

IMPORTANT SAFETY INSTRUCTIONS

Attention: To ensure safety, the power plug must be pulled out before cleaning. All safety precautions must be followed. Dispose of properly in accordance with Federal or local regulations. Risk of fire or explosion due to puncture of refrigerant tubing. Follow handling instructions carefully.

DANGER: Risk of fire or explosion. Flammable refrigerant R290/R600a used. This appliance should only be repaired by a qualified service technician. Do not use mechanical devices to defrost refrigerator. Do not puncture refrigerant tubing.

- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- Cleaning and user maintenance shall not be made by children without supervision.
- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.
- Please according to local regulations regarding disposal of the appliance for its flammable blowing gas. Before you scrap the appliance, please take off the doors to prevent children trapped.
- WARNING – Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
- WARNING – Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer
- WARNING – Do not damage the refrigerant circuit.
- WARNING – Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.
- This appliance is intended to be used in household and similar applications such as
 - staff kitchen areas in shops, offices and other working environments;
 - farm houses and by clients in hotels, motels and other residential type environments;
 - Catering and similar non-retail applications.
- The appliance shall not be installed in public corridors or lobbies.
- Please according to local regulations regarding disposal of the appliance for its flammable gas. Before you scrap the appliance, please take off the doors to prevent children trapped
- Warning: the appliance shall be installed in accordance with national wiring regulations
- The appliance is to be installed in accordance with the Safety Standard for Refrigeration Systems, ANSI/ASHRAE 15.
Notice: Any person who is involved with working on or breaking into a refrigerant circuit should hold a current valid certificate from an industry-accredited assessment authority, which authorizes their competence to handle refrigerants safely in accordance with an industry recognized assessment specification.
Notice: Servicing shall only be performed as recommended by the equipment manufacturer. Maintenance and repair requiring the assistance of other skilled personnel shall be carried out under the supervision of the person competent in the use of flammable refrigerants.
Notice: Component parts shall be replaced with like components so as to minimize the risk of possible ignition due to incorrect parts.
The appliance is to be installed in accordance with the Safety
- WARNING
Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacturer.
The appliance shall be stored in a room without continuously operating ignition sources (for example: open flames, an operating gas appliance or an operating electric heater.
Do not pierce or burn.
Be aware that refrigerants may not contain an odour.
- Warning: The appliance shall be stored in a well-ventilated area where the room size corresponds to the room area as specified for operation;
Warning: The appliance shall be stored in a room without continuously operating open flames (for example an operating gas appliance) and ignition sources (for example an operating electric heater).
Warning: The appliance shall be stored so as to prevent mechanical damage from occurring.
- Check that cabling will not be subject to wear, corrosion, excessive pressure, vibration, sharp edges, or any other adverse environmental effects. The check shall also take into account the effects of aging or continual vibration from sources such as compressors or fans.
- Before carrying out Decommissioning procedure, it is essential that the technician is completely familiar with the equipment and all its detail. It is recommended good practice that all refrigerants are recovered safely. Prior to the task being carried out, an oil and refrigerant sample shall be taken in case analysis is required prior to re-use of recovered refrigerant. It is essential that electrical power is available before the task is commenced.
When removing refrigerant from a system, either for servicing or decommissioning, it is recommended good practice that all refrigerants are removed safely.
The recovery equipment shall be in good working order with a set of instructions concerning the equipment that is at hand and shall be suitable for the recovery of all appropriate refrigerants including, when applicable, FLAMMABLE REFRIGERANTS The recovered refrigerant shall be returned to the refrigerant supplier in the correct recovery cylinder, and the relevant waste transfer note arranged. Do not mix refrigerants in recovery units and especially not in cylinders



Warning: Risk of fire / flammable materials, use care to avoid causing a fire by igniting flammable material.



Prop. 65 Warning for California Residents

WARNING

Cancer and Reproductive Harm - www.P65Warnings.ca.gov

The maximum loading of each type of shelf is 17.6 lbs. (8 kg.)

The ambient temperature and humidity conditions of the showcase are listed below:

Test room climate class	Dry bulb temperature °C	Relative humidity %	Dew point °C	Water vapour mass in dry air g/kg
0	20	50	9.3	7.3
1	16	80	12.6	9.1
8	23.9	55	14.3	10.2
2	22	65	15.2	10.8
3	25	60	16.7	12.0
4	30	55	20.0	14.8
6	27	70	21.1	15.8
5	40	40	23.9	18.8
7	35	75	30.0	27.3

NOTE the water vapour mass dry air is one of the main points influencing the performance and the energy consumption of the cabinets. Therefore, the order of the climate class in the table is based on the water vapour mass column.

FOOD STORAGE

- Do not overfill the freezer. Be sure to leave space between items and the inner surface of the cabinet to all good ventilation of cold air and even freezing. Do not put any bottled or canned beverage with freezing point above the temperature in the cabinet into the showcase.
- For foods that should be moisture-free or lose water easily, wrap them with hermetic food bags or fresh films before putting in the cabinet to avoid odors and reducing frosting.
- Storage of volatile and combustible gases, liquids such as strong acids, petrol ,etc. is forbidden.
- Never put hot food directly in the freezer. Food should be cold or frozen before placing it inside.
- The cabinet is intended exclusively for the storage and/or display of packaged foods only.
- This appliance is intended solely for the storage and/or display of packaged beverage products that are not potentially hazardous foods, such as soda (pop), beer, and wine.

MAINTENANCE

- The freezer should be cleaned regularly. When cleaning, turn the temperature controls to '0', unplug the power cord, and remove any food stored in the cabinet. Clean the inside using water and nonabrasive cloth or sponge and a mild detergent.
- Do not use boiling water, acid, chemical dilutents, petrol and oil, or abrasive powder.
- Dry all surfaces after cleaning.
- Use light soap water when cleaning the door seal, and apply talcum powder to the seal after allowing it to air dry to extend its service life.
- Wash surfaces with a mild detergent and water using a soft cloth. NOTE: DO NOT allow the power supply or any electric parts to come in contact with water.
- The unit should only be serviced by a qualified service technician. DO NOT disassemble any electrical parts, such as the compressor or temperature controller.
- All maintenance staff and others working in the local area shall be instructed on the nature of work being carried out. Work in confined spaces shall be avoided.
- If any hot work is to be conducted on the refrigerating equipment or any associated parts, appropriate fire extinguishing equipment shall be available on hand. A dry

chemical or CO2 fire extinguisher should be adjacent to the charging area.

- Notice: Any person who is involved with working on or breaking into a refrigerant circuit should hold a current valid certificate from an industry-accredited assessment authority, which authorizes their competence to handle refrigerants safely in accordance with an industry recognized assessment specification.
- Notice: Servicing shall only be performed as recommended by the equipment manufacturer. Maintenance and repair requiring the assistance of other skilled personnel shall be carried out under the supervision of the person competent in the use of flammable refrigerants.
- No person carrying out work in relation to a REFRIGERATING SYSTEM which involves exposing any pipe work shall use any sources of ignition in such a manner that it may lead to the risk of fire or explosion. All possible ignition sources, including cigarette smoking, should be kept sufficiently far away from the site of installation, repairing, removing and disposal, during which refrigerant can possibly be released to the surrounding space. Prior to work taking place, the area around the equipment shall be surveyed to make sure that there are no flammable hazards or ignition risks. "No Smoking" signs shall be displayed.
- Checking for presence of refrigerant, the area shall be checked with an appropriate refrigerant detector prior to and during work, to ensure the technician is aware of potentially toxic or flammable atmospheres. Ensure that the leak detection equipment being used is suitable for use with all applicable refrigerants, i.e., nonsparking, adequately sealed, or intrinsically safe.
- Ensure that the area is in the open or that it is adequately ventilated before breaking into the system or conducting any hot work. A degree of ventilation shall continue during the period that the work is carried out. The ventilation should safely disperse any released refrigerant and preferably expel it externally into the atmosphere. Where electrical components are being changed, they shall be fit for the purpose and to the correct specification. At all times, the manufacturer's maintenance and service guidelines shall be followed. If in doubt, consult the manufacturer's technical department for assistance.
- Detection of flammable refrigerants: Under no circumstances shall potential sources of ignition be used in the searching for or detection of refrigerant leaks. A halide torch (or any other detector using a naked flame) shall not be used.

DEFROSTING

- To maintain efficiency and performance, the freezer should be defrosted when the frost/ice in the cabinet is 4-5mm thick.
- Turn the temperature control to the '0' setting and unplug the power cord before defrosting. Remove all items from the freezer and open the door to allow the ice to melt. Wipe up water from defrosting with a soft cloth.
- Do not use sharp metal tools such as steel brush to clean the frost film when defrosting so as to avoid evaporator damage.

TROUBLE SHOOTING

Breakdown	Case	Removal method
The indicator is not on. The compressor does not start.	The plug isn't connected to the socket really.	Replug it.
	No power	Connect the socket with power.
Indicator light is on, but the compressor doesn't work and makes a buzzing noise	The power voltage is < 98V.	Make sure power source is correct. Check rating label
The compressor repeatedly starts up and stop after a minute	The power voltage is > 132V.	
The compressor works normally, but the temperature in the cabinet lowers too slowly.	The door is opened too frequently.	Reduce open times.
	The food in the cabinet is too much, and placed improperly.	Place foods properly keep place between them for ventilation of cold air.
	The frost film is too thick.	Take out foods and defrost.
	The surface of the condenser is too dirty.	Stop and clean the condenser.
	The door seals badly.	Adjust the door seal.
The noise is too loud	The freezer is placed unstably.	Make sure the unit is placed in a stable manner
	The roller or adjustable foot of freezer is loose.	Tighten the roller or adjustable foot.
	There may be an object touching the condenser pipes or filter in the compressor compartment.	Remove object touching pipe or filter

THE FOLLOWING ARE NOT FAULTS:

- When the freezer is working or after stopping for a while, the refrigerant in the pipes is cycling and gives out "running water" sounds.
- The surface temperature of the compressor may be up 158° F to 176° F (70°-80°C) when it is working.
- The back side of step freezer gives out heat.
- In rainy season, the outer surface of the cabinet may have dew, which makes no defects on normal use. Just dry it with a piece of cloth.
- The protective film peeling off. It is placed there to protect the surfaces during production and should be removed while installing the unit.

NORPOLE

LIMITED WARRANTY

Norpole, Inc. warrants each new Display Freezer to be free from defects in material and workmanship and agrees to remedy any such defect or to furnish a new part(s) (at the company's option) for any part(s) of the unit that has failed during the warranty period. Parts and labor expenses are covered on this unit for a period of four years from the date of purchase.

In addition, Norpole, Inc. warrants the compressor (parts only) to be free from defects in material and workmanship for a period of 5 years. The consumer is responsible for all labor and transportation expenses related to the diagnosis and replacement of the compressor after the initial three-year warranty expires. In the event that the unit requires replacement or refund under the terms of this warranty, the consumer is responsible for all transportation expenses to return the unit to our factory prior to receiving a replacement unit or refund. A refund or replacement will be issued at the discretion of Norpole, Inc.. A copy of the dated sales receipt/invoice is required to receive warranty service or a refund.

This warranty covers appliances in use within the contiguous United States, Alaska, Hawaii and Puerto Rico. The warranty does not cover the following:

- Damages due to shipping damage or improper installation.
- Damages due to misuse or abuse.
- Punctures to the evaporator system due to improper defrosting of the unit.
- Content losses due to failure of the unit.
- Inside components such as the shelves, etc.
- Repairs performed by unauthorized service agents.
- Service calls that do not involve defects in material and workmanship, such as instructions on proper use of the product or improper installation.
- Replacement or resetting of fuses or circuit breakers.
- Failure of this product if used for purposes other than its intended purpose.
- Disposal costs for any failed unit not returned to our factory.
- Any delivery or installation costs incurred as the result of a unit that fails to perform as specified.
- Expenses for travel and transportation for product service if your appliance is located in a remote area where service by an authorized service technician is not available.
- The removal and reinstallation of your appliance if it is installed in an inaccessible location or is not installed in accordance with published installation instructions.
- Refunds for non-repairable products are limited to the price paid for the unit per the sales receipt or invoice.
- This warranty is non-transferable. This warranty applies only to the original purchaser and does not extend to any subsequent owners.

LIMITATIONS OF REMEDIES AND EXCLUSIONS

Product repair in accordance with the terms herein, is your sole and exclusive remedy under this limited warranty. Any and all implied warranties including merchantability and fitness for a particular purpose are hereby limited to three years or the shortest period allowed by law. Norpole, Inc. is not liable for incidental or consequential damages and no representative or person is authorized to assume for us any other liability in connection with the sale of this product. Under no circumstances is the consumer permitted to return this unit to the factory without the prior written consent of Norpole, Inc.

Some states prohibit the exclusion or limitation of incidental or consequential damages, or limitations on implied warranties. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Model	Parts & Labor	Compressor (Part Only)	Type of Service
NPDC49W	4 Year	5 Years	In-Field

For Service or Assistance please call 888-775-0202 or visit us on the web at <https://mcappliance.com/product-registration>.