

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	11/23/10	AM

ENGINEERING DATA

ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: DC to 10GHz
VSWR MAX: 1.20:1


MECHANICAL:
INTERFACE: PER MIL-STD-348

MATERIAL:
CONTACTS: BERYLLIUM COPPER, BRASS
BODIES & COUPLING NUT: STAINLESS STEEL, BRASS
INSULATORS: NORYL, PTFE

FINISH:
CONTACTS: GOLD PLATED
BODIES: GOLD PLATED
COUPLING NUT: PASSIVATED

ENVIRONMENTAL:
OPERATING TEMP.: 0°C to 85°C

NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL
DIMENSIONS ARE REFERENCE ONLY.

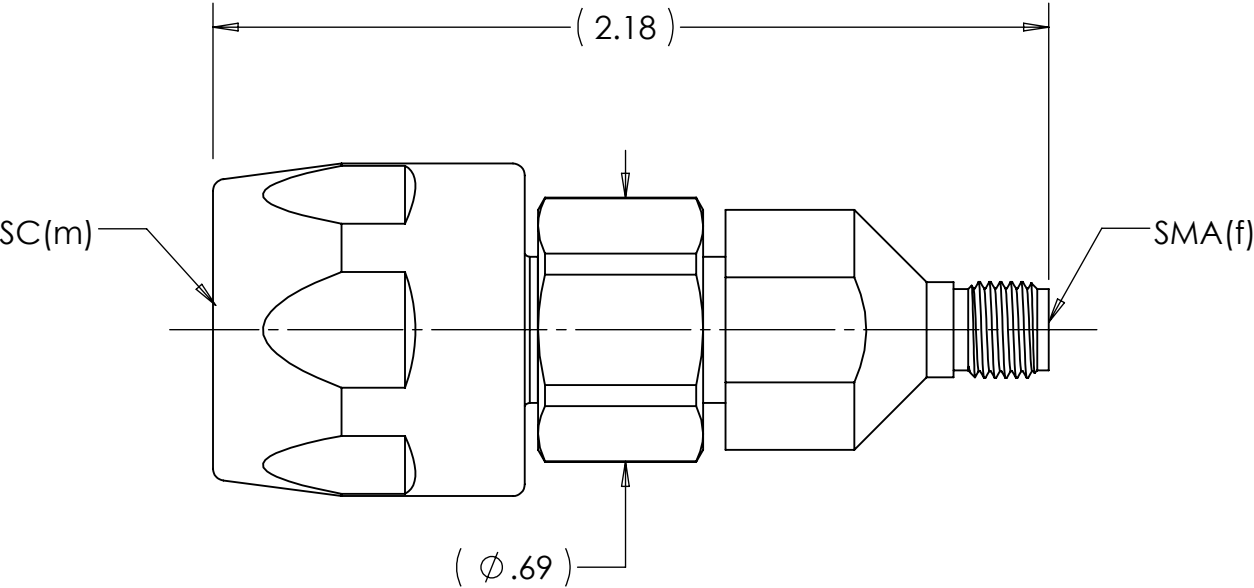

MATERIAL	DO NOT SCALE DRAWING	DRAWN MVC	DATE 11/23/10	<div><div><div><div>TRU</div></div><div>The Custom Interconnect Leader™</div></div><div>TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960</div></div>		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: <div>63/√</div>	ENG APPR. AM	DATE 11/23/10			
		MFG APPR.	DATE			
		OTHER APPR.	DATE			
COMMENTS:	THIRD ANGLE PROJECTION 	SIZE B		DWG. NO. TRU-11156-GGX		REV -
surface area: sq inch		CAGE CODE: 92180		SCALE: 2:1	SHEET 1 OF 1	
weight: lbs						