


DWG. NO. 363-522-9000R			
REV	DESCRIPTION	BY DATE	APPRO
G	ECR 7404	JED 7/15/02	JED

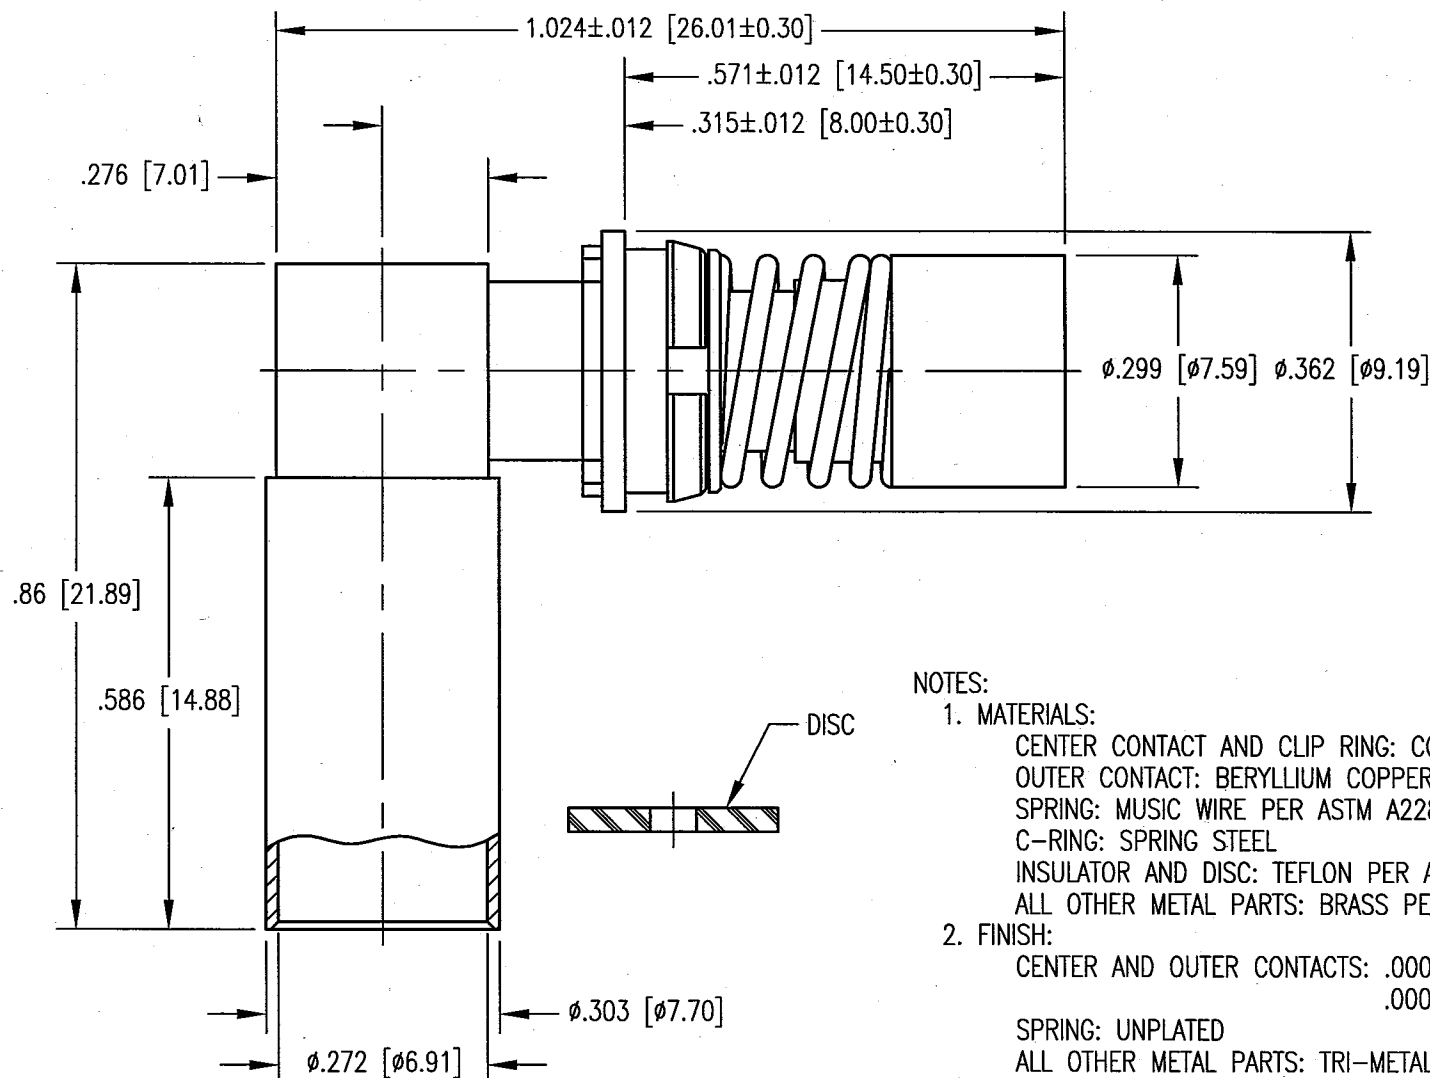

NOTES:

1. MATERIALS:

CENTER CONTACT AND CLIP RING: COPPER ALLOY
 OUTER CONTACT: BERYLLIUM COPPER PER ASTM B194
 SPRING: MUSIC WIRE PER ASTM A228
 C-RING: SPRING STEEL
 INSULATOR AND DISC: TEFLON PER ASTM D1710
 ALL OTHER METAL PARTS: BRASS PER ASTM B16

2. FINISH:

CENTER AND OUTER CONTACTS: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

SPRING: UNPLATED


ALL OTHER METAL PARTS: TRI-METAL PLATE

3. DESIGNED FOR USE WITH ANDREW HELIAX 5.7mm CABLE OR EQUIVALENT.


4. MOTOROLA PART NUMBERS: 2886494V13 & 2886494V27

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM)				NORTHROP GRUMMAN			
TOLERANCES: DECIMALS .XX ± .01 [0.254] XXX ± .005 [0.127] ANGLES ± 2°				Winchester Electronics 400 Park Road Watertown, CT 06795			
SCALE: 4:1				TITLE			
CUSTOMER DRAWING				BMA RIGHT ANGLE RECEPTACLE (SNAP-FIT)			
DRAWN JED	DATE 10/2/00	CHECKED JH	DATE 10/4/00	A 363-522-9000R			
APPROVED JMC	DATE 10/3/00	APPROVED KJT	DATE 10/3/00				
				SHT.	OF	REV.	
				1	2	G	

DWG. NO. 363-522-9000R			
REV	DESCRIPTION	BY DATE	APPD
	SEE SHEET 1		

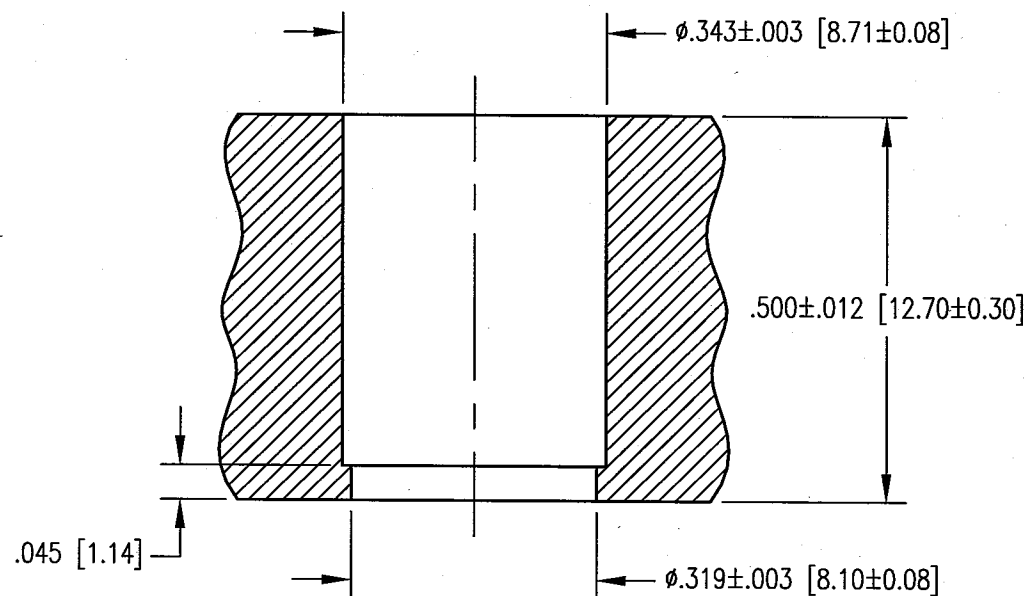

RECOMMENDED MOUNTING HOLE

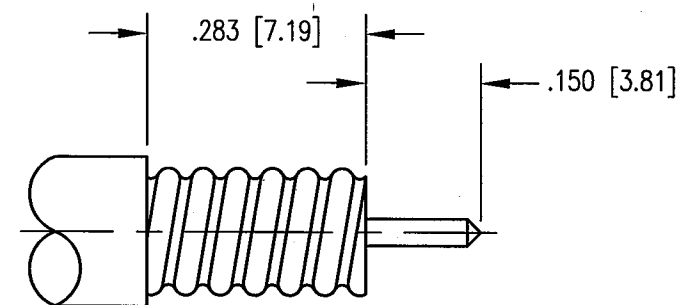

CABLE TRIMMING DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]				NORTHROP GRUMMAN			
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2°				SCALE: 4:1			
CUSTOMER DRAWING				TITLE BMA RIGHT ANGLE RECEPTACLE (SNAP-FIT)			
DRAWN JED	DATE 10/2/00	CHECKED JH	DATE 10/4/00	WINCHESTER ELECTRONICS 400 Park Road Watertown, CT 06795			
APPROVED JMC	DATE 10/3/00	APPROVED KJT	DATE 10/3/00	A 363-522-9000R			
				SHT. 2	OF 2	REV. G	