

CONVERTIBLE SANDBOX & PICNIC TABLE



ASSEMBLY INSTRUCTIONS

Assembly requires 1 adult (approx. 1 hour assembly time)

Warning! For outdoor domestic use only.
Adult supervision recommended at all times.
Not suitable for children under 36 months until fully assembled – Small parts – Choking hazard.
Min. User Age: 18 months. Max. User Weight: 110 lbs.

PG505W

Advisory Section

To ensure the safety of you, the installer and your children, it is important that these instructions are read fully before commencing the positioning and assembly of this product. Assemble table on a clean flat area.

Keep your sandpit safe for the children

- 1. Always cover the sandpit when not in use, to prevent unwanted animals from playing in the sand.
- 2. Before covering your sandpit, place a large object in the center of the sand to prop up the cover.

 This will allow water to drain off the cover, and prevent any rain water from "pooling" in the center of the sand pit.

 This must be checked regularly.
- 3. Should any water still accumulate and form a pool, please ensure that this water is removed. Standing water can pose a danger to children.
- 4. Regularly check sand for impurities and any other sharp objects that may cause harm to children, including at the beginning of the season.
- 5. Use washed play sand suitable for use in children's sand pits.
- 6. Regularly change the sand to ensure that there is no build up of mold and to ensure that the play area is hygienic.
- In windy and adverse weather conditions place the product in a safe area. In these conditions the product may become a hazard.

Timber Advice

This product has been made from premium timber. Great care has been taken in selecting, and machining the timber before it is presented to you. Timber is a natural product and as such may experience changes throughout the course of its life. This means it may:

- Develop openings (gaps, slits, apertures, cracks, splits) along the line of the grain. These openings are due to the difference in moisture content between the internal and outer surfaces of the timber. This is to be expected, is totally acceptable and will not affect the integral strength, life or guarantee of the product.
- Warp and distort its shape. Any distortion will be slight and will not affect the safety or enjoyment of this product.
- Fade as the timber reacts with sunlight. The timber should be treated with a proprietary product to act as a protective barrier, i.e. a water repellent, upon completion of assembly and on an annual basis.
- After first year of service treat product with a good quality treatment safe for children's use.


Routine Maintenance

It is advised that on a regular basis (i.e. at the beginning of the season and monthly thereafter) all main parts/ fixings are checked as secure, well oiled (if metallic), have no sharp points/edges and are intact. Replace, and/or tighten when necessary. Failure to do so may result in an injury or hazard.


Fabric Parts are shower-proof only.

Remember to keep these instructions in a safe place for future reference.


PG505W STANDARD PARTS LIST



C1530 QTY.2




C1529 QTY. 1







QTY. 2



C1533 QTY. 2




C1568 QTY. 2





14\frac{1}{8}" C1569

QTY. 1









D1570 (Sand liner) QTY. 2

HARDWARE



#8 X 2" PHILLIPS FLAT HEAD WOOD SCREW QTY. **64**



M6X40mm QTY. **16**



M6X15mm **QTY. 16**

TOOLS NEEDED



PHILLIPS SCREW DRIVER (NOT INCLUDED)


NOTE:


An electric screwdriver is helpful in assembly. However, please set at low torque and use extreme caution with an electric screwdriver because you could over-tighten the hardware & strip out the screws.



On a <u>clean flat surface</u> attach **C1568** boards to **C1536** board as shown.


NOTE: Tighten, but **DO NOT** strip out any screws.

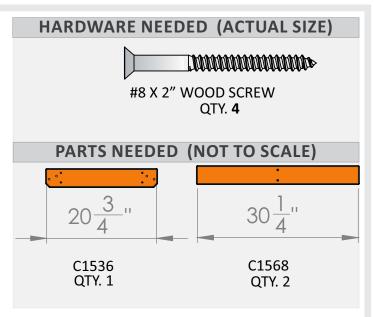


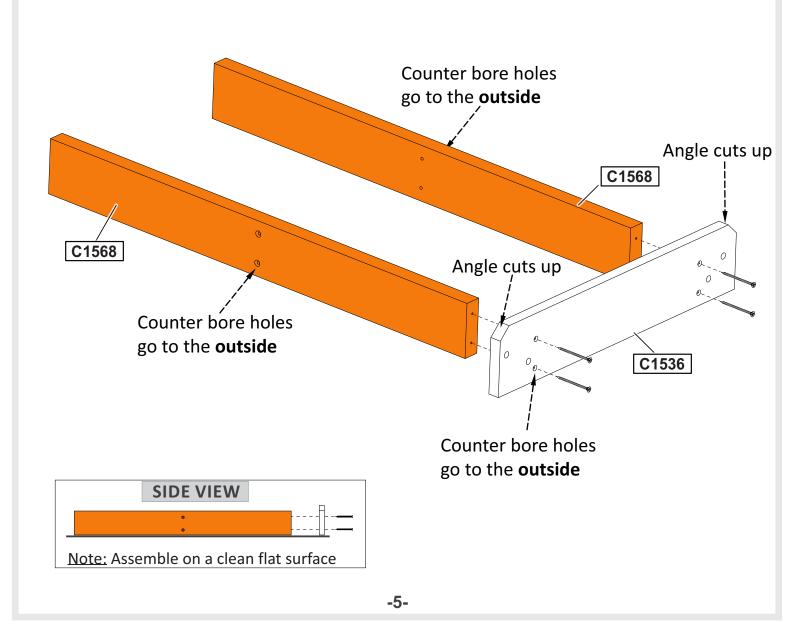



Attach a second **C1536** board to other end as shown.


NOTE: Tighten, but DO NOT strip out any screws.

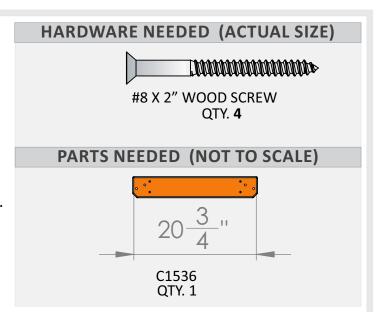

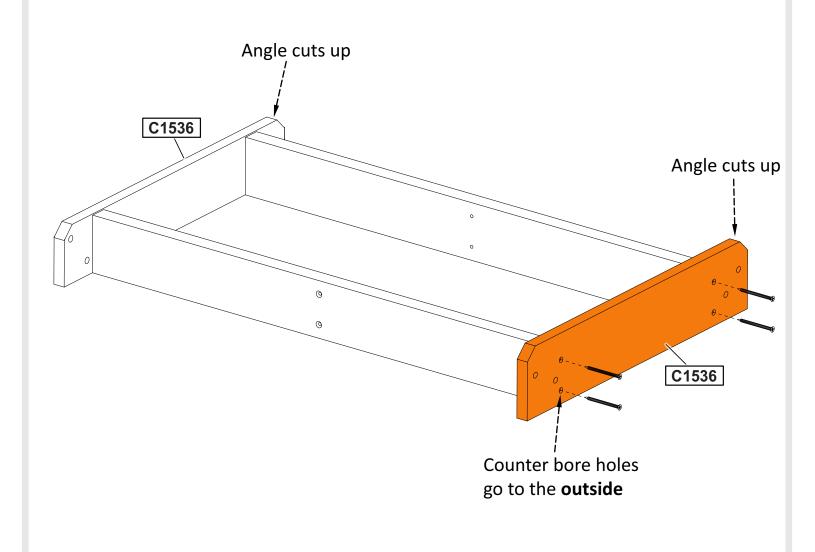

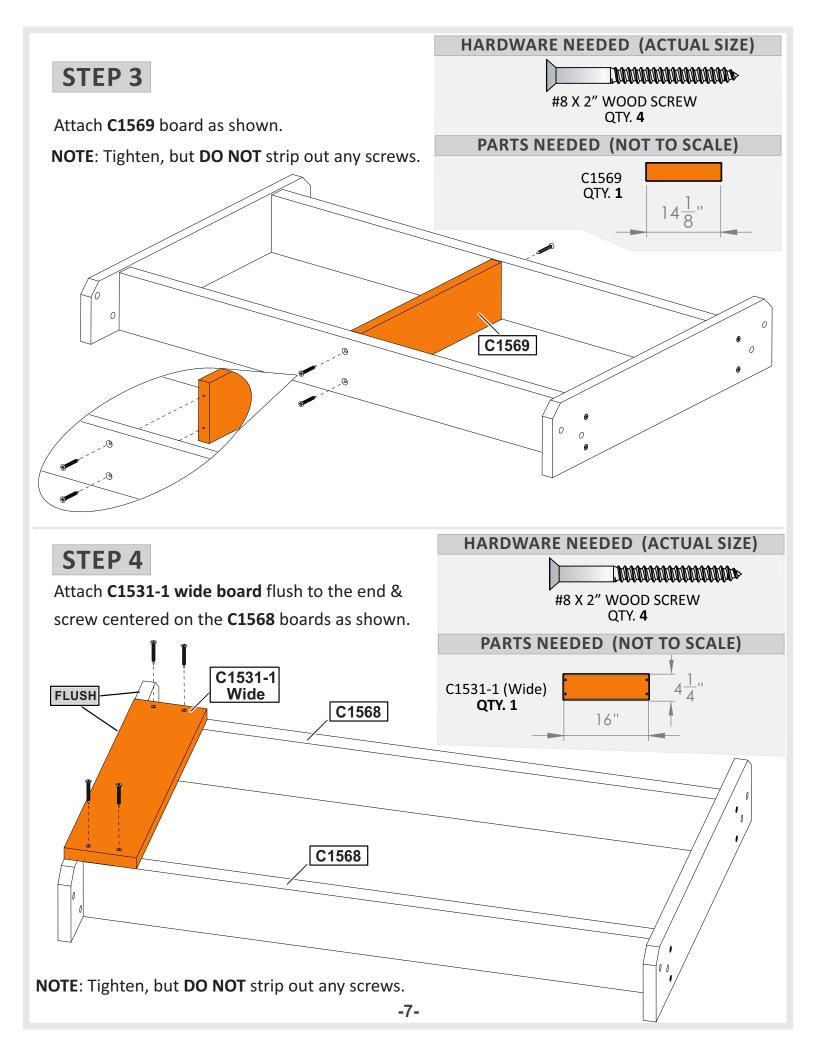

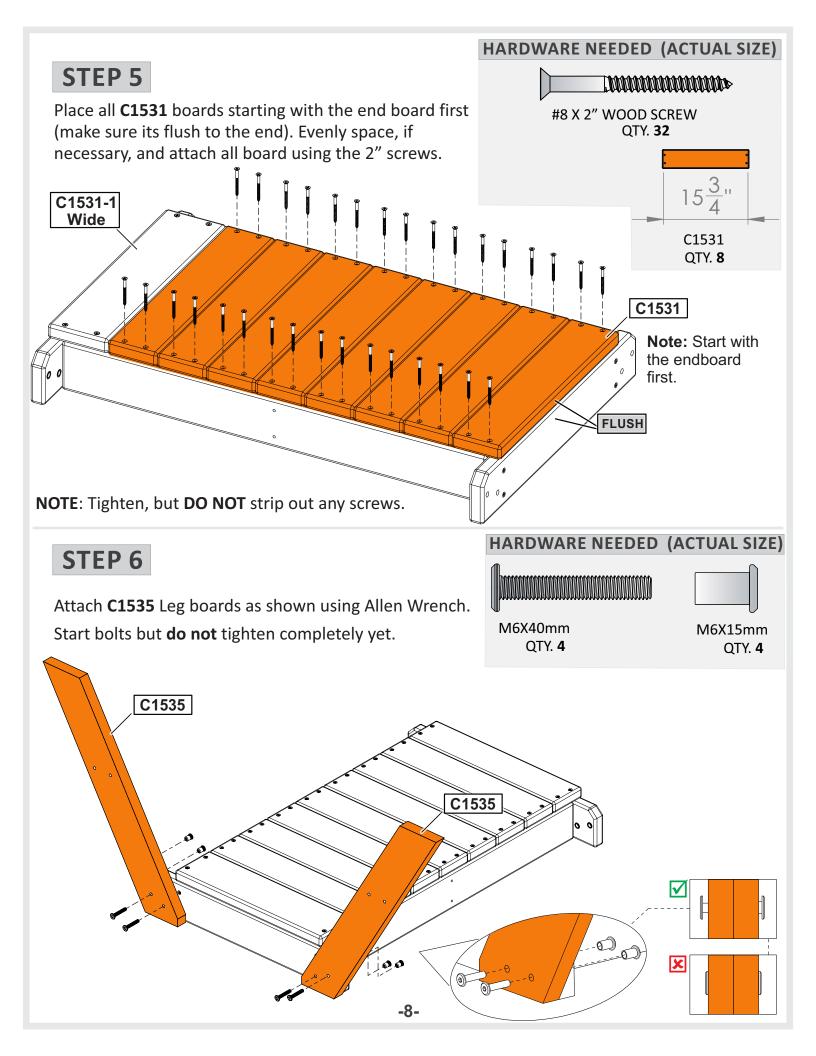

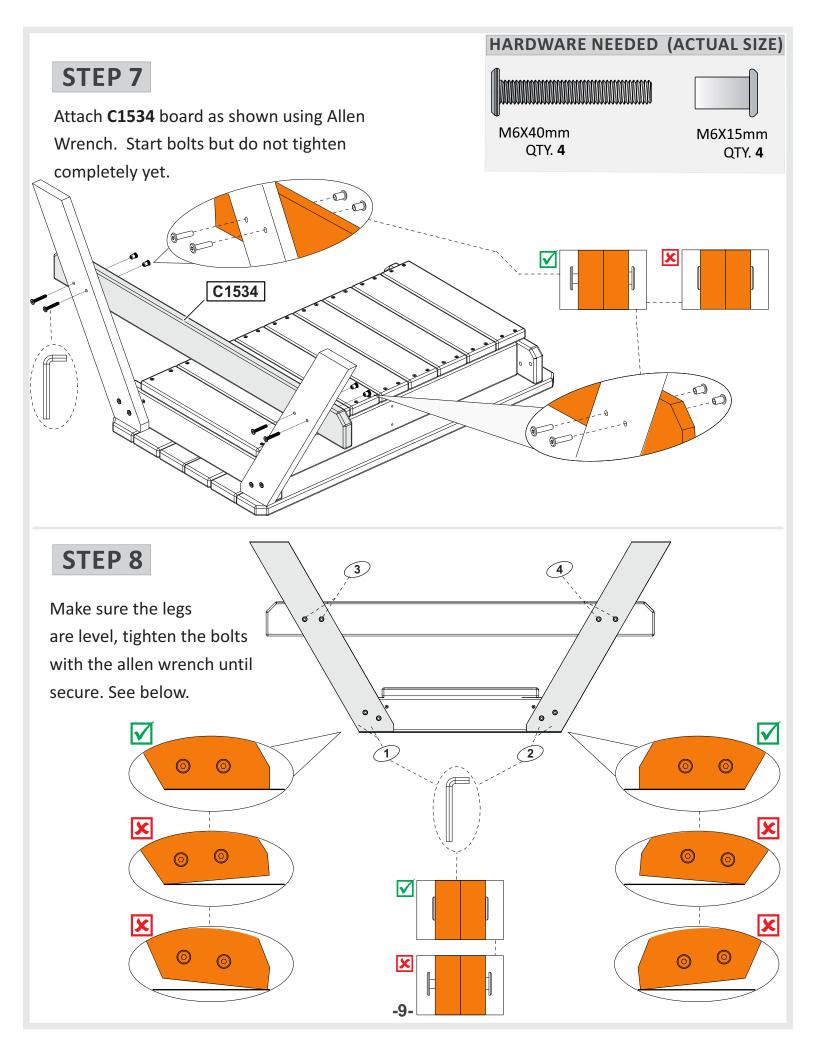


REPEAT Steps 6-8 to attach boards C1534 & C1535 to the other end of the table.


STEP 10


Attach **C1533** Seat boards making sure they are **flush** to the leg boards as shown.

HARDWARE NEEDED (ACTUAL SIZE)

#8 X 2" WOOD SCREW QTY. **8**

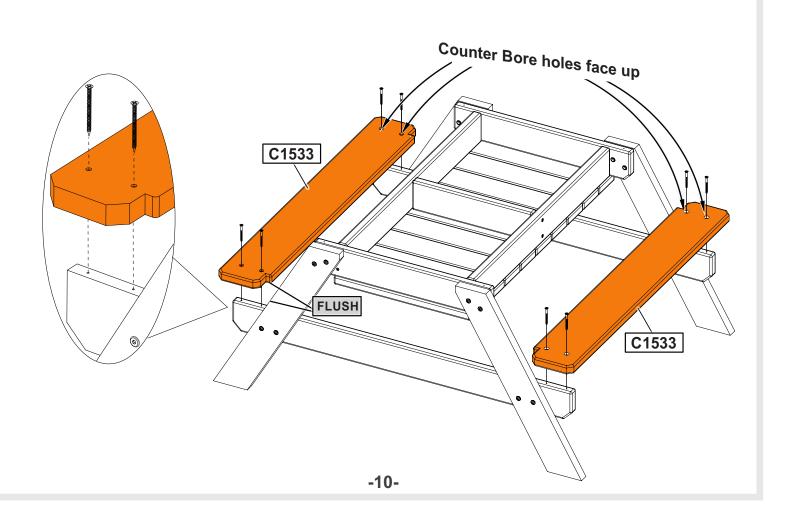

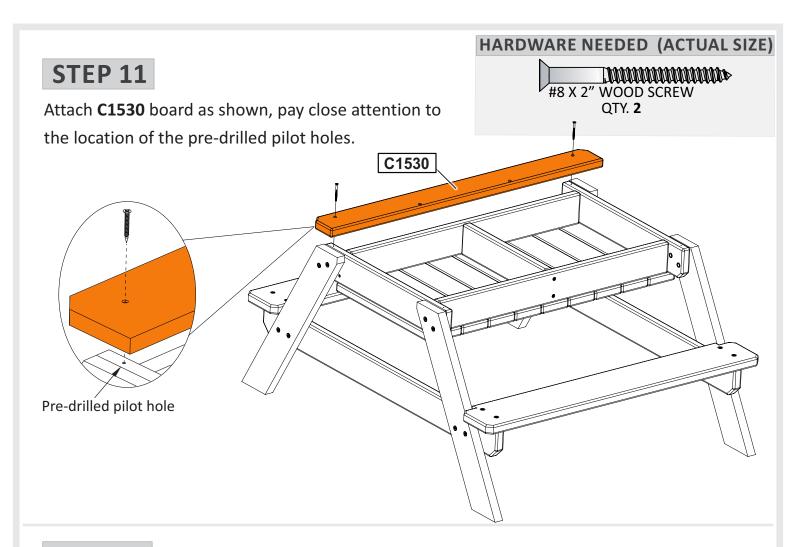


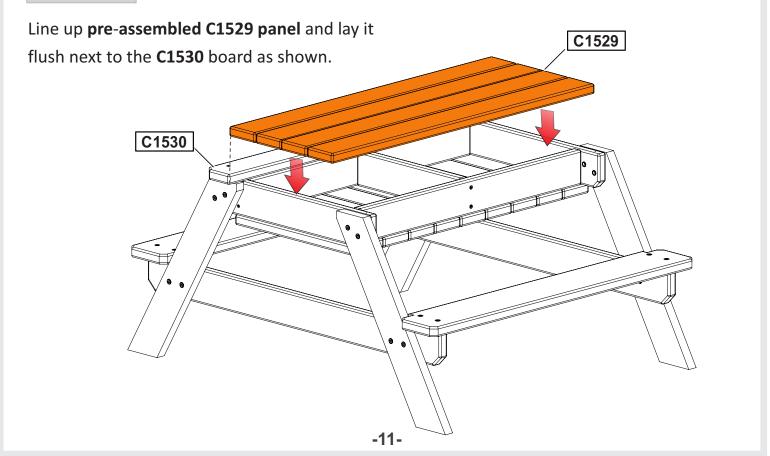


Attach **C1530** board as shown leave less than 3/16" gap so that the panel **C1529** can be removed.



#8 X 2" WOOD SCREW QTY. **2**

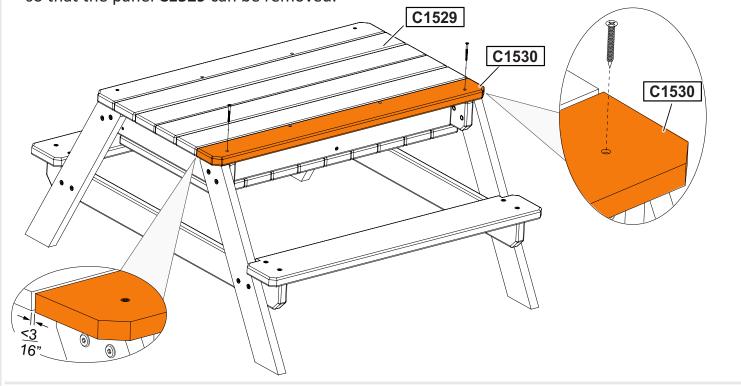

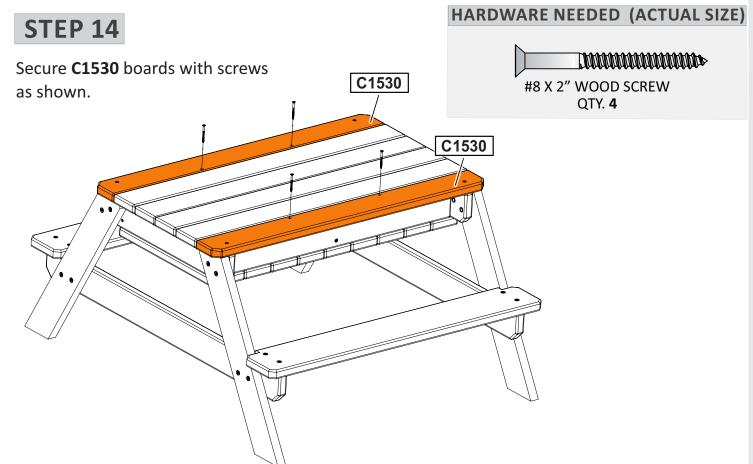

-12-

Remove panel C1529 and insert two D1570 sand liners as shown.

Always cover the table with panel C1529 when not in use.

