

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	03/22/13	AM

ENGINEERING DATA:

ELECTRICAL:

IMPEDANCE: 50 Ohms nominal
FREQUENCY RANGE: DC to 1.0 GHz
VOLTAGE RATING: 3,000 Volts

MECHANICAL:

INTERFACE:

7-16(m) per IEC-169-4, DIN-47223
QRM(m) per TRU specification

MATERIAL:

INSULATORS: Teflon
CENTER CONTACTS: Brass, Beryllium Copper
GASKET: Silicone Rubber
OTHER METAL PARTS: Brass

FINISH:


CENTER CONTACTS: Gold plated
OTHER METAL PARTS: Nickel plated




ENVIRONMENTAL:

TEMPERATURE RANGE: -65°C to 165°C

NOTES:

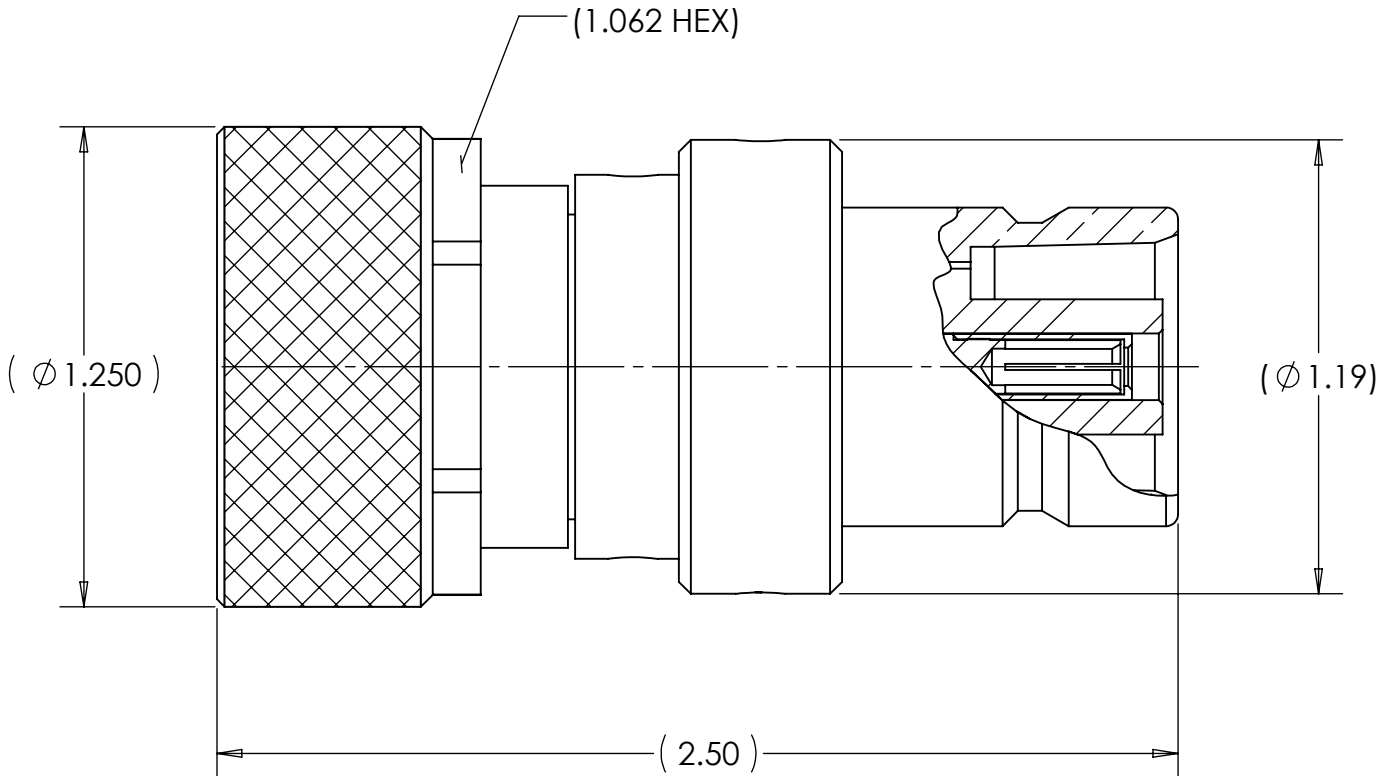1. UNLESS OTHERWISE SPECIFIED; ALL
DIMENSIONS ARE REFERENCE ONLY.



MATERIAL	DO NOT SCALE DRAWING	DRAWN MVC	DATE 03/21/13	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: $\pm 1/64$.XX : $\pm .01$.XXX: $\pm .005$ ANGLES: $\pm 1/2^\circ$ MACHINED SURFACES: 	ENG APPR. AM	DATE 03/21/13			
		MFG APPR.	DATE			
		OTHER APPR.	DATE			
COMMENTS:	THIRD ANGLE PROJECTION 	SIZE B		DWG. NO. TRU-12284		REV -
surface area: sq inch weight: lbs		CAGE CODE: 92180		SCALE: 2:1	SHEET 1 OF 1	