

# SPEAKMAN® SM-3440

## Versatile™ Pressure Balance Shower Package

### FEATURES:

- Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure valve with integral volume control and integral stops and hand held spray combination.
- Chrome plated brass wall plate with metal index.
- Chrome plated brass lever handle.
- Independent center sleeve allows up to 1 in. of rough-in variation.
- Adjustable temperature limit stop. Brass body.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- Can be installed back-to-back. Roughing-in template.
- Four port valve with 1/2 in. female copper sweat inlets and shower outlet.
- Furnished with 1/2 in. pipe plug.
- Chrome plated brass supply ell with wall flange.
- 69 in. square lock stainless steel hose with rubber liner.
- Swivel connector.
- In-line vacuum breaker.
- 30 in. chrome plated brass slide bar with mounting screws.
- VS-100-PC handshower with flow control device reduces flow to 2.5 gpm (9.46 L/min)



### FINISH:



PC

### COMPLIANCE:

- Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards (SM-3400 valve)

### OPTIONS: Add suffix to model #


- 69 in. white vinyl hose  -VH
- Contractor Packs Available

### WARRANTY:

- 5 year limited

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat. 3. The locations of the slide bar and supply ell are optional, but restricted by the 69" hose length running from the supply ell connection to the hand shower and the 6" minimum requirement between the in-line vacuum breaker and top of the hand shower. 4. For ADA mounting locations consult ADAAG, ANSI A 117.1, or state regulations.

## DIMENSIONS:

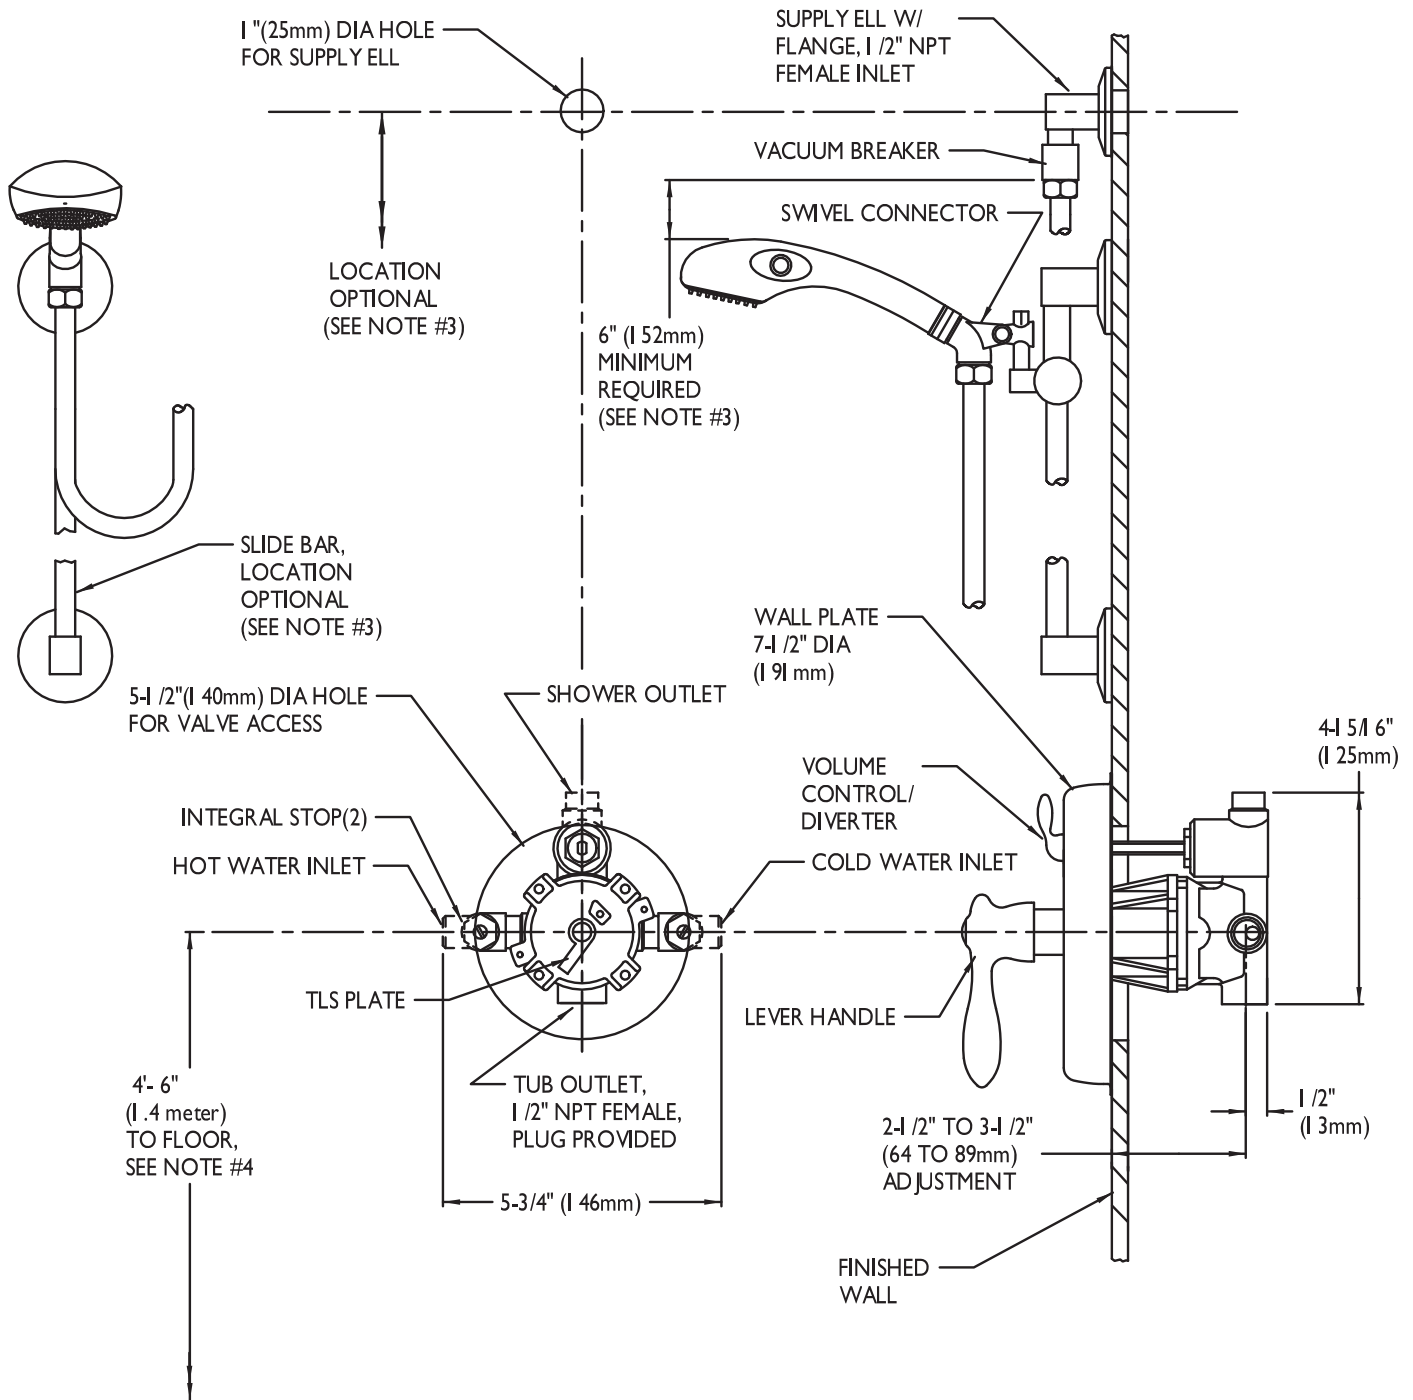

# SPEAKMAN® SM-3450

## Versatile™ Pressure Balance Shower/Tub Package

### FEATURES:

- Includes Sentinel Mark II® concealed anti-scald balanced pressure shower valve and handheld spray combination with integral diverter and integral stops.
- Chrome plated brass wall plate with metal index.
- Chrome plated brass lever handle. Independent center sleeve allows up to 1 in. of rough-in variation.
- Adjustable temperature limit stop. Brass body.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- Can be installed back-to-back.
- Roughing-in template.
- Four port valve with ½ in. female copper sweat inlets and shower outlet (Tub outlet ½ NPT female).
- S-1554 chrome plated tub spout.
- In-line vacuum breaker.
- VS-100-PC handshower with flow control device reduces flow to 2.5 gpm (9.46 L/min)
- 69 in. square lock stainless steel hose with rubber liner.
- Chrome plated brass supply elbow with wall flange.
- 30 in. slide bar with mounting screws.
- Swivel connector.



### FINISH:



PC

### COMPLIANCE:

- Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards (SM-3400 valve)

### OPTIONS: Add suffix to model #

- 69 in. white vinyl hose  -VH
- Contractor Packs Available

### WARRANTY:

- 5 year limited

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat. 3. The location of the slide bar and supply ell is optional, but restricted by the 69" hose length running from the supply ell connection to hand shower and the 6" minimum requirement between the in-line vacuum breaker & top of hand shower. 4. For ADA mounting locations consult ADAAG, ANSI A171, or state regulations.

## DIMENSIONS:

