



DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

125-1-1

REVISIONS

ISSUE	CHANGES
6	CN 36718 E REDRAWN ME 12/08/95
7	CN 38726 C BDH 11/26/02

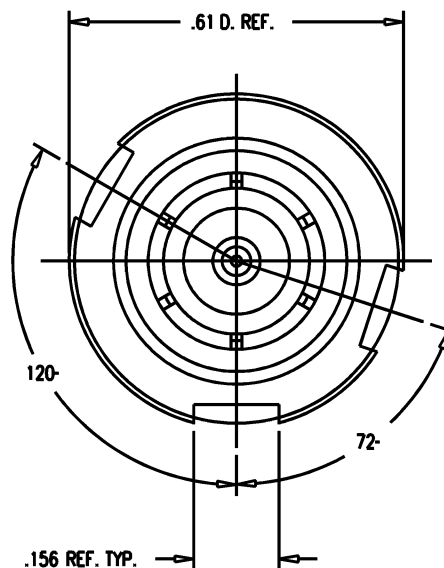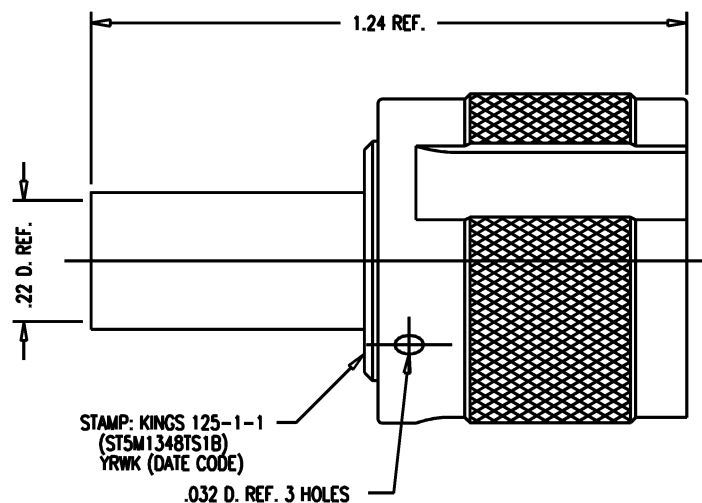

NOTES:

1. FOR USE WITH RG-142, 223 AND 400/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE 3-166-2M88 (CP-465).
3. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
4. MATES WITH KA-89-41 KEYING BASKET.
5. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-4894
 - GASKET: SILICONE RUBBER, ZZ-R-765
 - K-GRIP SLEEVE: COM'L BRONZE, ASTM-B-140
 - C-RING } BER. COPPER, ASTM-B-194
 - OUTER CONTACT }
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
6. FINISHES:
 - CENTER CONTACT: GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
7. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50~W
 - FREQUENCY RANGE: DC TO 11GHz
 - VOLTAGE RATING: 500 VOLTS RMS

QGS1096

SCALE : 4:1

APPROX SURFACE AREA

USED ON

REF: MC AIR ST5M1348 TS1B REV.L

PLUG, TNC, M

DRAWN	ME	08/08/95
DESIGN	VLS	08/08/95
APPR.		DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

GSD

125-1-1